



SB1020 THRU SB1045

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 45 Volts Forward Current - 10.0 Ampere

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA


Case: JEDEC DO-201AD molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.04 ounce, 1.10 grams

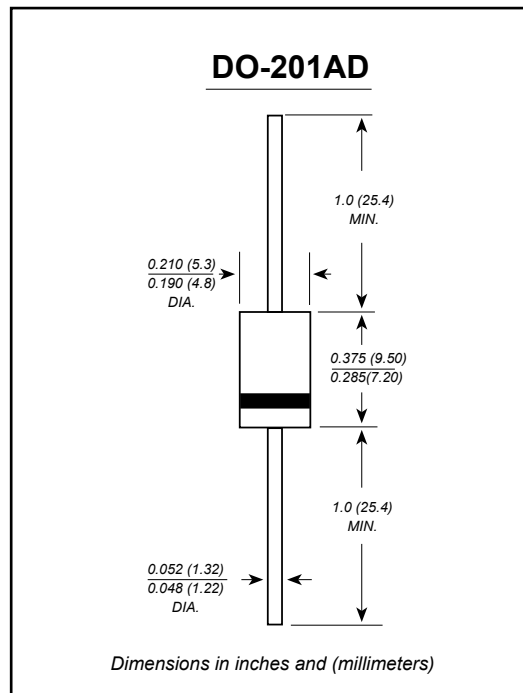

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Characteristic	SYMBOLS	SB1020	SB1030	SB1035	SB1040	SB1045	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	35	40	45	V
Maximum RMS voltage	V_{RMS}	14	21	25	28	32	V
Maximum DC blocking voltage	V_{DC}	20	30	35	40	45	V
Maximum average forward rectified current 0.375" (9.5mm) lead length (see fig.1)	$I_{(AV)}$	10.0					A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	340.0					A
Maximum instantaneous forward voltage at 10.0A	V_F	0.55					V
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	0.8 70					mA
Typical junction capacitance (NOTE 1)	C_J	900					pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	8.0					°C/W
Operating junction temperature range	T_J	-65 to +150					°C
Storage temperature range	T_{STG}	-65 to +150					°C


Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted




SB1020 THRU SB1045


RATINGS AND CHARACTERISTIC CURVES

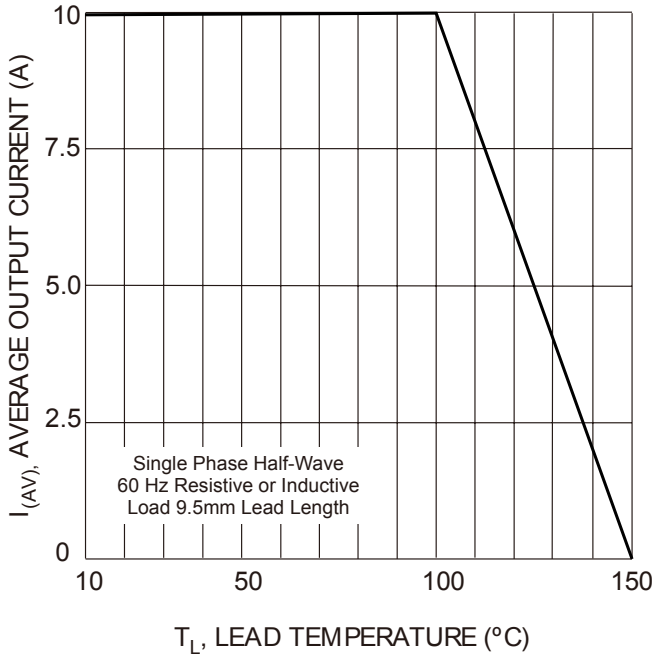


T_L , LEAD TEMPERATURE ($^{\circ}$ C)
Fig. 1 Forward Current Derating Curve

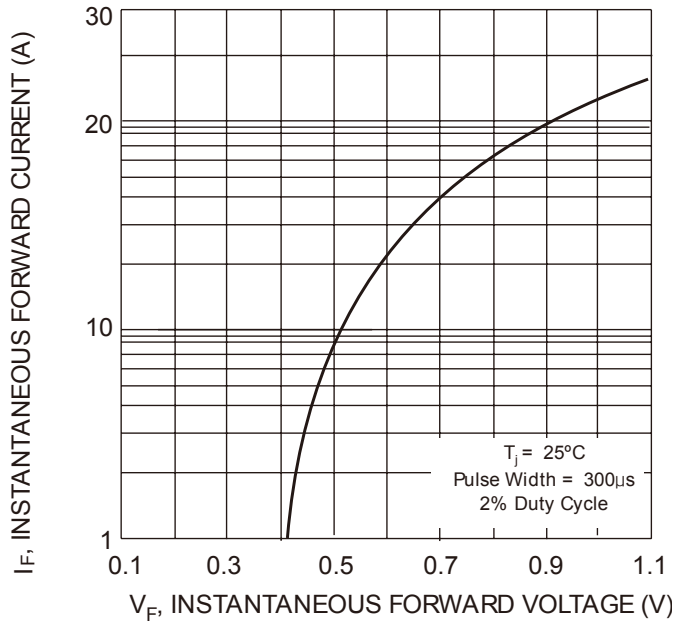

V_F , INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 2 Typical Forward Voltage Characteristics

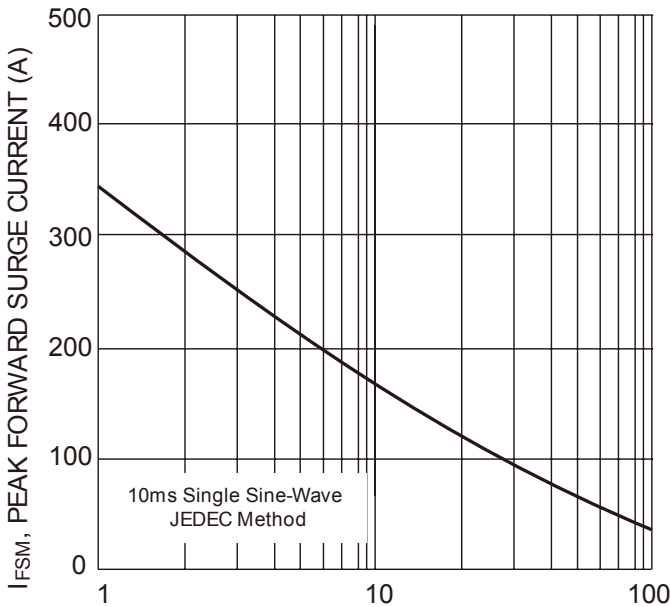

NUMBER OF CYCLES AT 50 Hz
Fig. 3 Peak Forward Surge Current

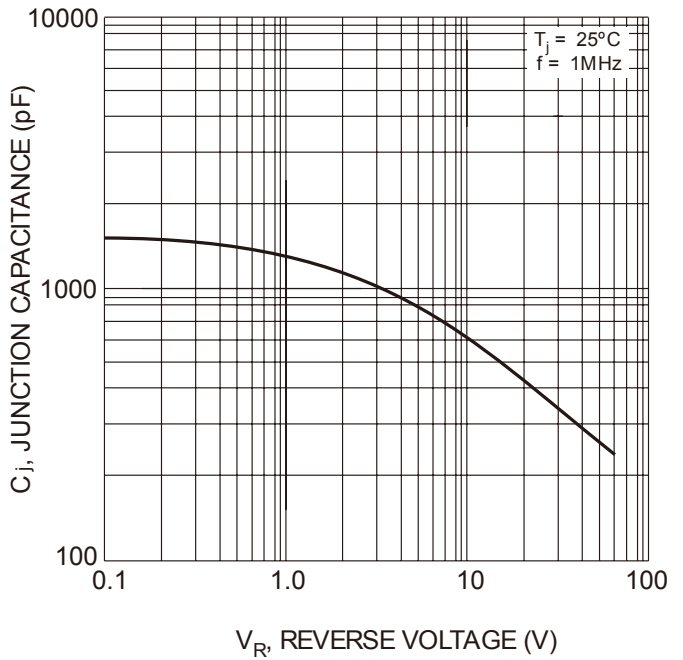

V_R , REVERSE VOLTAGE (V)
Fig. 4 Typical Junction Capacitance