

**UTT2N10**

Preliminary

*Power MOSFET***100V COMPLEMENTARY
ENHANCEMENT MODE
MOSFET (N-CHANNEL)****■ DESCRIPTION**


The UTC **UTT2N10** is a complementary enhancement mode MOSFET, it uses UTC advanced technology to provide customers low on resistance, low gate charge and low threshold voltage.

The UTC **UTT2N10** is universally applied in DC-AC Inverters and DC Motor control.

■ FEATURES*** N-CHANNEL**

$$R_{DS(on)} < 0.7\Omega @ V_{GS} = 10V$$


$$R_{DS(on)} < 1.0\Omega @ V_{GS} = 4.5V$$

*** High switching speed****■ SYMBOL****■ ORDERING INFORMATION**


Ordering Number	Package	Pin Assignment			Packing
		1	2	3	
UTT2N10G-AA3-R	SOT-223	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UTT2N10G-AA3-R	(1) Packing Type	(1) R: Tape Reel
	(2) Package Type	(2) AA3: SOT-223
	(3) Green Package	(3) G: Halogen Free and Lead Free

■ MARKING

1



SOT-223

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise specified)

PARAMETER			SYMBOL	RATINGS	UNIT
Gate-Source Voltage			V _{GSS}	±20	V
Drain-Source Voltage			V _{DSS}	100	V
Drain Current	Continuous	V _{GS} =10V, T _A =25°C, t ≤10 sec	I _D	1	A
	Pulsed	V _{GS} =10V, T _A =25°C (Note1)	I _{DM}	4.3	A
Power Dissipation		T _A =25°C	P _D	0.87	W
		Derating		6.94	mW/°C
Junction Temperature			T _J	-55~+150	°C
Storage Temperature Range			T _{STG}	-55~+150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient (Note)	θ _{JA}	55	°C/W
Junction to Case	θ _{JC}	12	°C/W





Notes: θ_{JA} is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins.

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	I _D =250μA, V _{GS} =0V	100			V
Drain-Source Leakage Current		I _{DSS}	V _{DS} =100V, V _{GS} =0V			0.5	μA
Gate-Source Leakage Current	Forward	I _{GSS}	V _{GS} =+20V, V _{DS} =0V			+100	nA
	Reverse		V _{GS} =-20V, V _{DS} =0V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA	2		4	V
Static Drain-Source On-State Resistance(Note 1)		R _{DS(ON)}	V _{GS} =10V, I _D =1.5A			0.7	Ω
			V _{GS} =4.5V, I _D =1A			1.0	Ω
DYNAMIC PARAMETERS							
Input Capacitance (Note 3)		C _{ISS}	V _{GS} =0V, V _{DS} =25V, f=1.0MHz		220		pF
Output Capacitance (Note 3)		C _{OSS}			33		pF
Reverse Transfer Capacitance (Note 3)		C _{RSS}			17		pF
SWITCHING PARAMETERS							
Total Gate Charge (Note 3)		Q _G	V _{GS} =10V, V _{DS} =50V, I _D =1A		21		nC
Gate to Source Charge (Note 3)		Q _{GS}			2		nC
Gate to Drain Charge (Note 3)		Q _{GD}			1.5		nC
Turn-ON Delay Time (Note 2, 3)		t _{D(ON)}	V _{DD} =30V, I _D =1A, R _G ≈6Ω, V _{GS} =10V		25.6		ns
Rise Time (Note 2, 3)		t _R			16		ns
Turn-OFF Delay Time (Note 2, 3)		t _{D(OFF)}			55		ns
Fall-Time (Note 2, 3)		t _F			13		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I _S	T _A =25°C (Note 2)			1	A
Maximum Body-Diode Pulsed Current		I _{SM}	T _A =25°C (Note 3)			4.3	A
Drain-Source Diode Forward Voltage (Note 1)		V _{SD}	I _S =1.5A, V _{GS} =0V			0.95	V

Notes: 1. Measured under pulsed conditions. Pulse width ≤ 300μs; duty cycle ≤ 2%
2. Switching characteristics are independent of operating junction temperature
3. For design aid only, not subject to production testing

■ TEST CIRCUITS AND WAVEFORMS

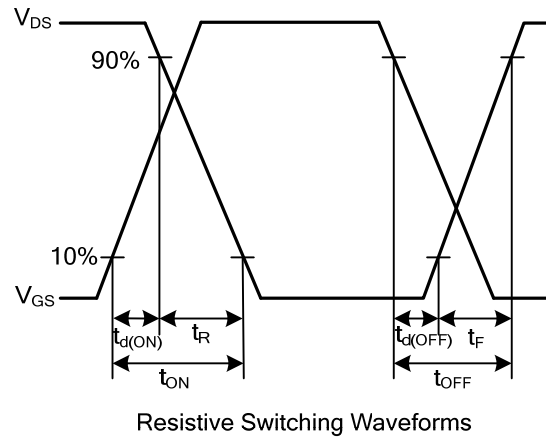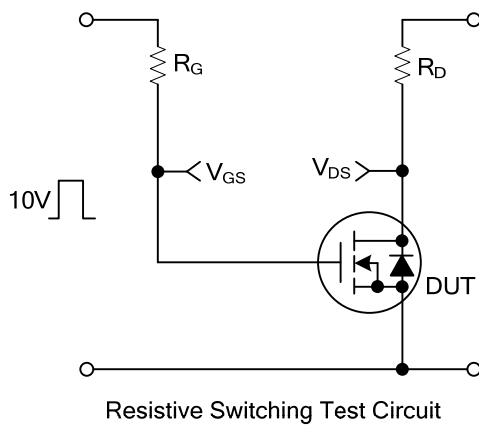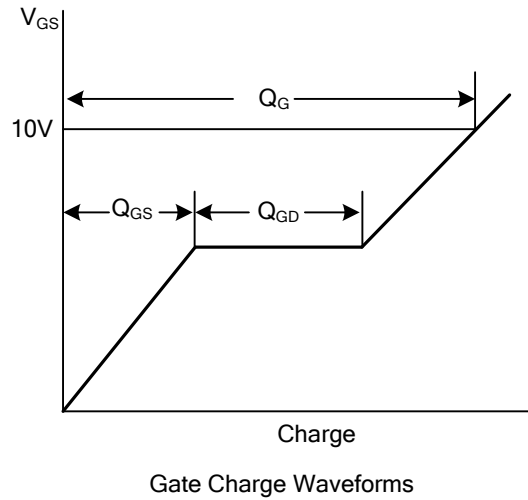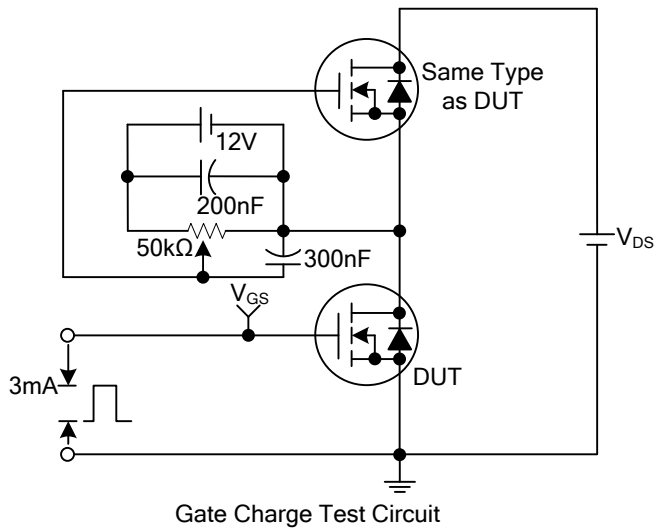

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.