

200mW, SMD High Speed Switching Diode

FEATURES

- Low power loss, high efficiency
- Ideal for automated placement
- High surge current capability
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- On-board DC/DC converter

MECHANICAL DATA

- Case: SOD-523F
- Molding compound meets UL 94 V-0 flammability rating
- Moisture sensitivity level: level 1, per J-STD-020
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Polarity: Indicated by cathode band
- Weight: $1.68 \pm 0.5\text{mg}$ (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
I_F	200	mA
V_{RRM}	100	V
I_{FSM}	500	mA
V_F at $I_F = 100\text{mA}$	1.2	V
$T_{J\text{ MAX}}$	150	°C
Package	SOD-523F	
Configuration	Single die	



SOD-523F



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	1SS400	UNIT
Marking code on the device		A	
Power dissipation	P_D	200	mW
Repetitive peak reverse voltage	V_{RRM}	100	V
Reverse voltage	V_R	100	V
Forward current	I_F	200	mA
Non-repetitive peak forward surge current	I_{FSM}	500	mA
Junction temperature range	T_J	-55 to +150	°C
Storage temperature range	T_{STG}	-55 to +150	°C

THERMAL PERFORMANCE			
PARAMETER	SYMBOL	LIMIT	UNIT
Junction-to-ambient thermal resistance	$R_{\theta JA}$	625	°C/W

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	MIN	MAX	UNIT
Forward voltage ⁽¹⁾	$I_F = 100\text{mA}$, $T_J = 25^\circ\text{C}$	V_F	-	1.2	V
Breakdown voltage	$I_R = 100\mu\text{A}$, $T_J = 25^\circ\text{C}$	V_{BR}	100	-	V
Reverse current @ rated V_R ⁽²⁾	$V_R = 80\text{V}$, $T_J = 25^\circ\text{C}$	I_R	-	0.1	μA
Junction capacitance	$V_R = 0.5\text{V}$, $f = 1\text{MHz}$	C_J	-	4	pF
Reverse recovery time	$I_F = 10\text{mA}$, $V_R = 6\text{V}$, $R_L = 100\ \Omega$	t_{rr}	-	4	ns

Notes:

1. Pulse test with $PW = 0.3\text{ms}$
2. Pulse test with $PW = 30\text{ms}$

ORDERING INFORMATION

ORDERING CODE ⁽¹⁾	PACKAGE	PACKING
1SS400 RK	SOD-523F	3,000 / 7" Tape & Reel
1SS400 RJ	SOD-523F	8,000 / 7" Tape & Reel
1SS400 RKG	SOD-523F	3,000 / 7" Tape & Reel
1SS400 RJG	SOD-523F	8,000 / 7" Tape & Reel

Notes:

1. "G" means green compound (halogen free)

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Typical Junction Capacitance

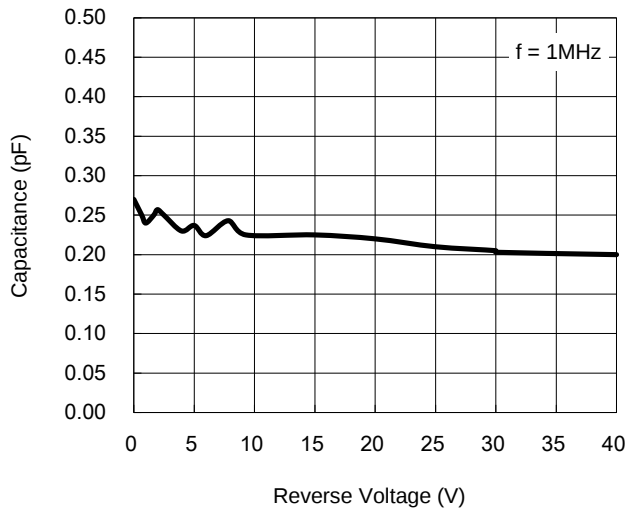


Fig.2 Typical Forward Characteristics

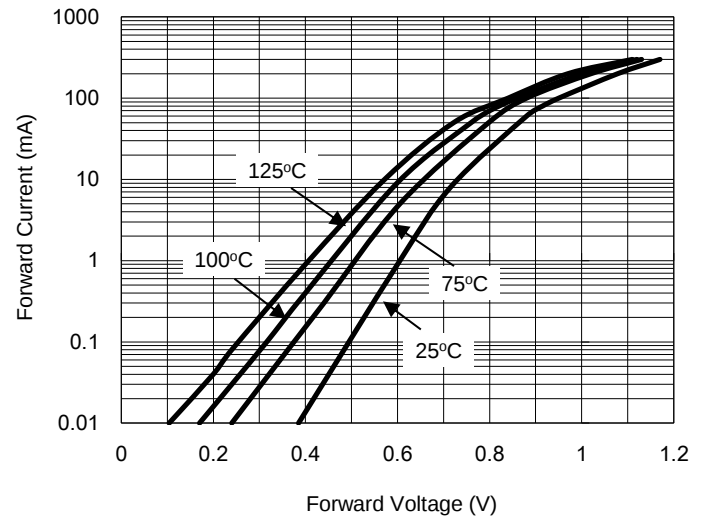


Fig.3 Power Derating Curve



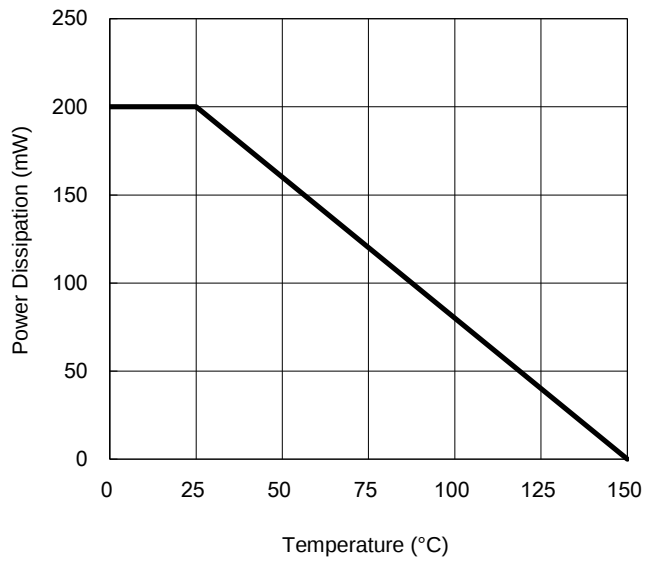


Fig.4 Typical Reverse Characteristics

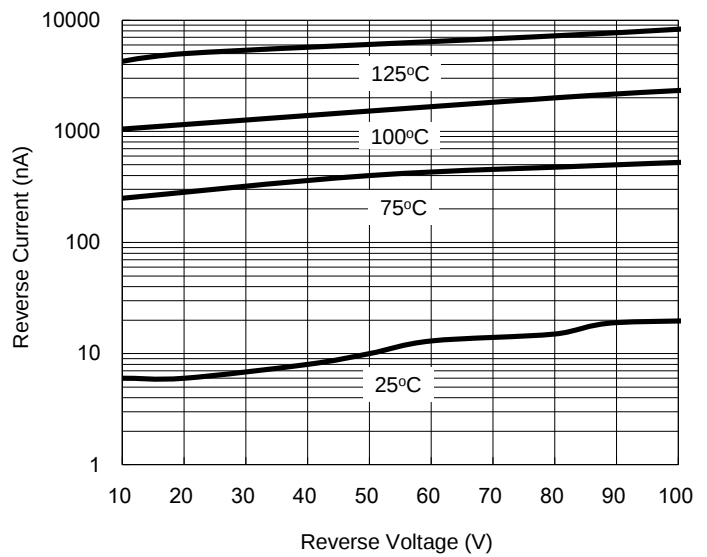


PACKAGE OUTLINE DIMENSIONS

SOD-523F

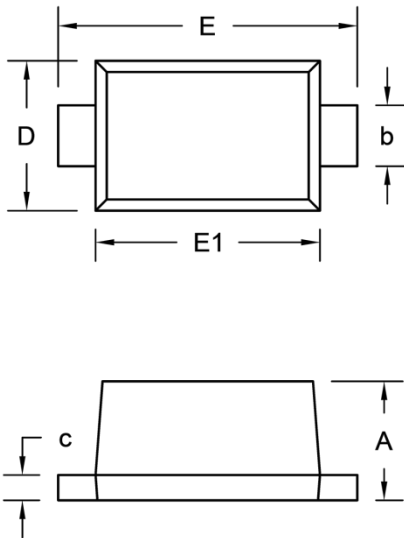

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	0.50	0.77	0.020	0.030
b	0.25	0.40	0.010	0.016
c	0.07	0.20	0.003	0.008
D	0.70	0.90	0.028	0.035
E	1.50	1.70	0.059	0.067
E1	1.10	1.30	0.043	0.051

SUGGESTED PAD LAYOUT

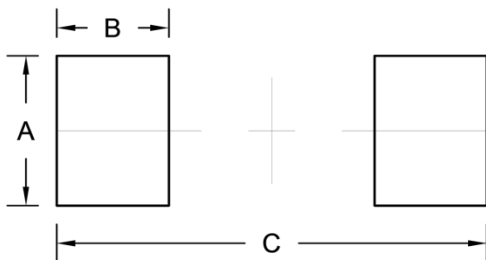

Symbol	Unit (mm)	Unit (inch)
A	0.80	0.031
B	0.60	0.024
C	2.30	0.091

Notes:

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met.

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.