

# XX1010-QT

**Doubler**  
14.625-15.0/29.25-30 GHz

Rev. V3

## Features

- Integrated Gain, Doubler and Driver Stages
- +4.5 V Single Positive Bias
- Integrated Bypassing Capacitor
- +20 dBm Output Saturated Power
- 30 dBc Fundamental Suppression
- On-Chip ESD Protection
- 100% RF, DC and Output Power Testing
- Lead-Free 3 mm 16-Lead QFN Package
- RoHS\* Compliant and 260°C Reflow Compatible

## Description


The XX1010-QT is a 14.625-15.0 / 29.25-30.0 GHz GaAs MMIC doubler that integrates a gain stage, passive doubler and driver amplifier onto a single device. This device has a self-biased architecture requiring a single positive supply (+4.5V) only and integrated on-chip bypassing and DC blocking capacitors eliminating the need for any external components.

This device uses InGaAs pHEMT device technology, and is based upon electron beam lithography to ensure high repeatability and uniformity.

The XX1010-QT has integrated ESD structures for protection and comes in a low cost 3 mm QFN package.

The device is well suited for millimeter wave Point-to-Point Radio, LMDS, SATCOM and VSAT applications.

## Functional Block Diagram

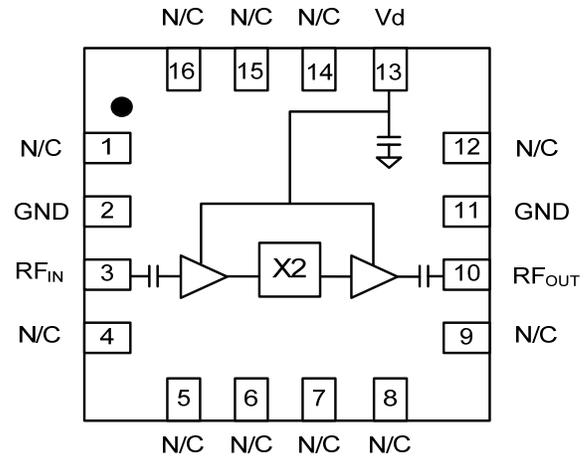

## Pin Configuration<sup>1</sup>

Pin No.	Function
1,4,5,6,7,8	No Connection
2,11	Ground
3	RF Input
9,12,14,15,16	No Connection
10	RF Output
13	Vd

1. The exposed pad centered on the package bottom must be connected to RF and DC ground.

## Ordering Information

Part Number	Package
XX1010-QT-0G00	Bulk Quantity
XX1010-QT-0G0T	1000 Piece Reel
XX1010-QT-EV1	Evaluation Board

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

1

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400  
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588  
 Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

**Electrical Specifications: Input Freq: 14.625-15.0 GHz, T<sub>A</sub> = 25°C, V<sub>D</sub> = +4.5 Volts**

Parameter	Units	Min.	Typ.	Max.
Output Frequency Range	GHz	29.25	-	30.0
RF Input Power Level	dBm	3.0	-	10.0
Input Return Loss	dB	-	12	-
Output Return Loss	dB	-	14	-
Fundamental Suppression	dBc	-	35	-
Output Power	dBm	+18.0	+20.0	+22.0
Supply Current	mA	-	200	280

**Absolute Maximum Ratings<sup>2,3</sup>**

Parameter	Absolute Max.
Supply Voltage	+5.25 VDC
Supply Current	350 mA
Input Power	12 dBm
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
Junction Temperature <sup>4,5</sup>	+160 °C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM Technology Solutions does not recommend sustained operation near these survivability limits.
- Operating at nominal conditions with T<sub>J</sub> ≤ 160°C will ensure MTTF > 1 x 10<sup>6</sup> hours.
- Junction Temperature (T<sub>J</sub>) = T<sub>C</sub> + Θ<sub>JC</sub> \* ((V \* I) - (P<sub>OUT</sub> - P<sub>IN</sub>))  
Typical thermal resistance (Θ<sub>JC</sub>) = 65°C/W.  
a) For T<sub>C</sub> = 25°C,  
T<sub>J</sub> = 101°C @ 4.5 V, 280 mA, P<sub>IN</sub> = 3 dBm, P<sub>OUT</sub> = 20 dBm  
b) For T<sub>C</sub> = 85°C,  
T<sub>J</sub> = 156°C @ 4.5 V, 264 mA, P<sub>IN</sub> = 3 dBm, P<sub>OUT</sub> = 20 dBm

**Handling Procedures**


Please observe the following precautions to avoid damage:

**Static Sensitivity**


Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these class 1A devices.

## Typical Performance Curves:


**$P_{OUT}$  @  $2xFin$  vs.  $Fin$  @  $P_{IN} = 3$  dBm**

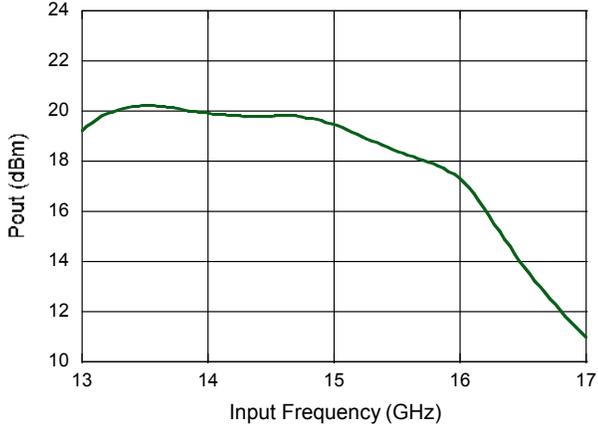


**$P_{OUT}$  @  $1xFin$  vs.  $Fin$  @  $P_{IN} = 3$  dBm**

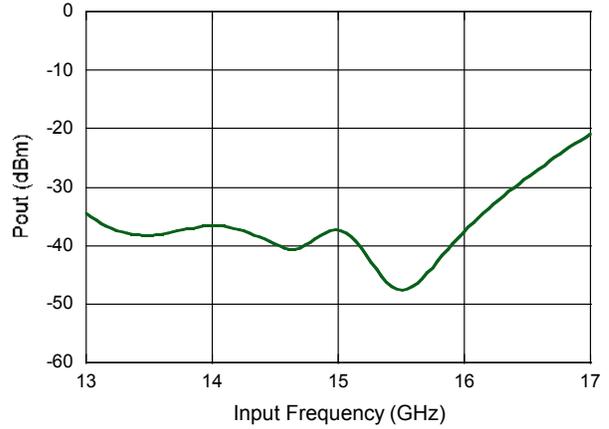

**$P_{OUT}$  @  $2xFin$  vs.  $Fin$  @  $P_{IN} = 10$  dBm**

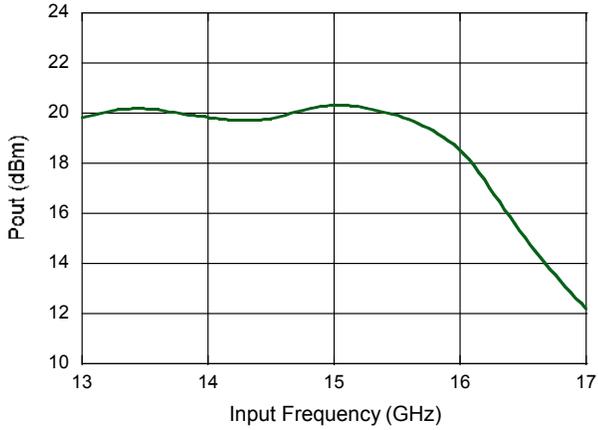


**$P_{OUT}$  @  $1xFin$  vs.  $Fin$  @  $P_{IN} = 10$  dBm**

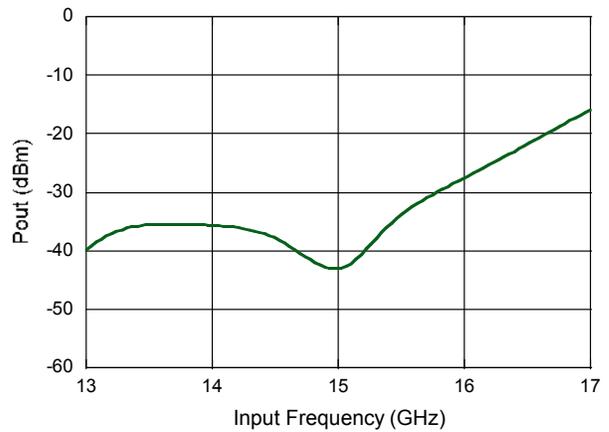


## Typical Performance Curves:


**Input Return Loss**

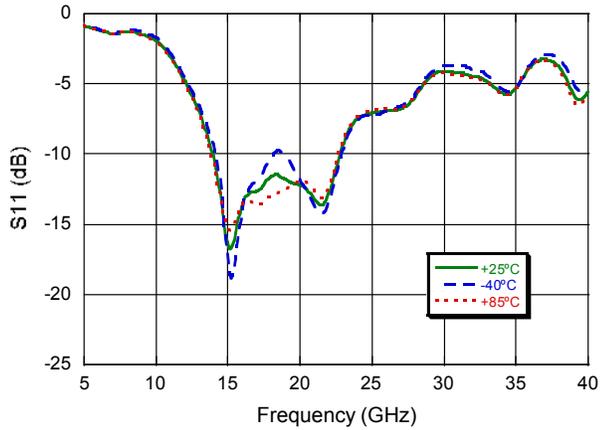


**Output Return Loss**

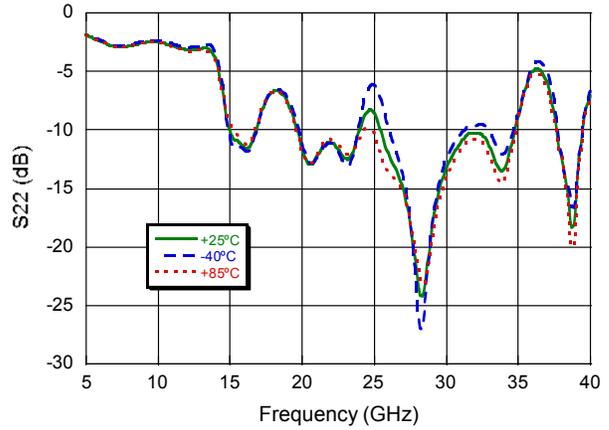

**$P_{OUT}$  vs.  $P_{IN}$**

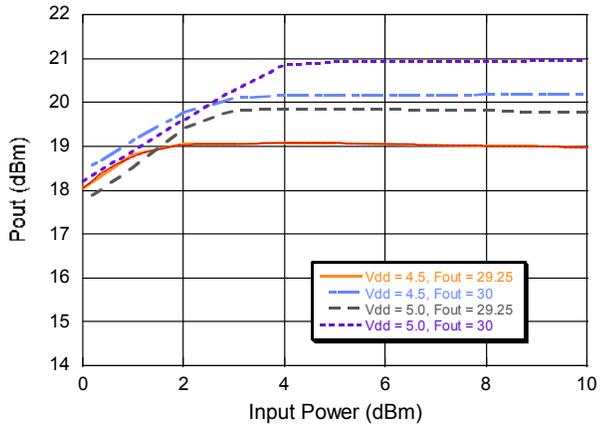

**$I_{ds}$  vs.  $P_{IN}$**

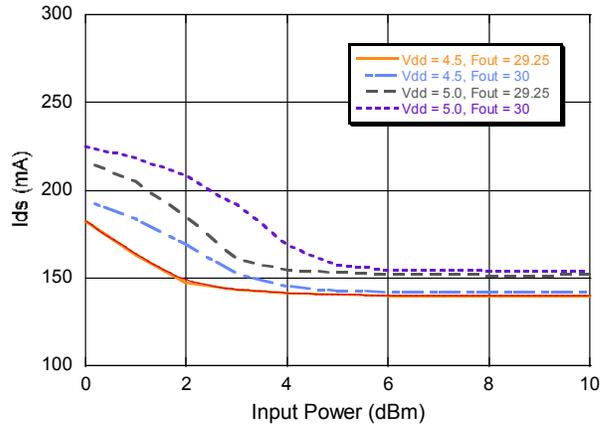


# XX1010-QT


Doubler  
14.625-15.0/29.25-30 GHz

Rev. V3


## Evaluation Board Layout

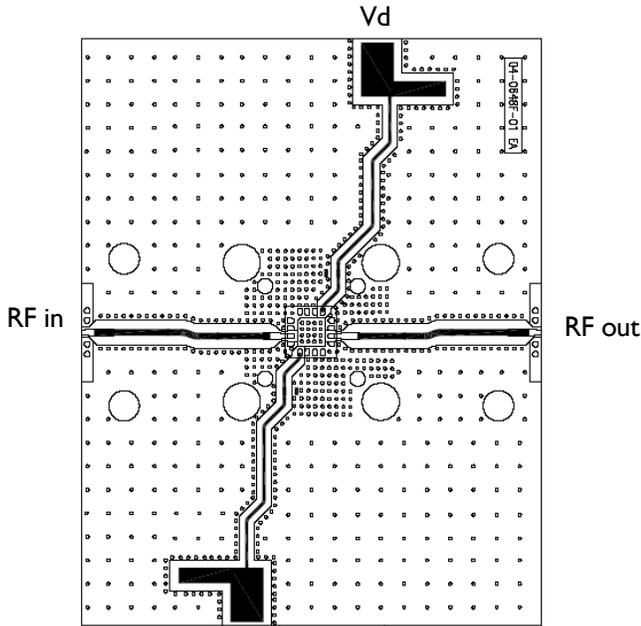

## PCB Land Pattern

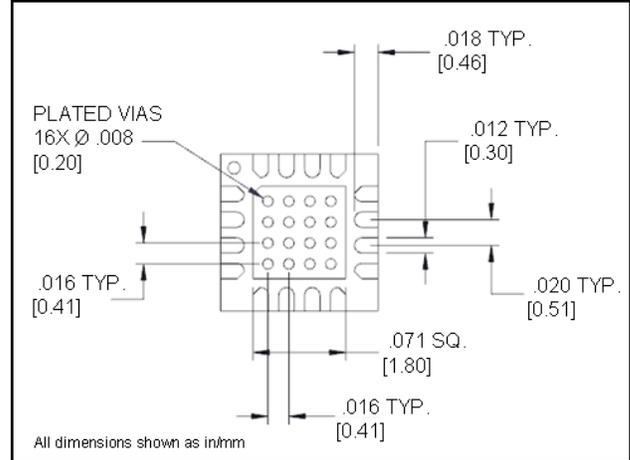

## Lead-Free 3mm 16-Lead PQFN†

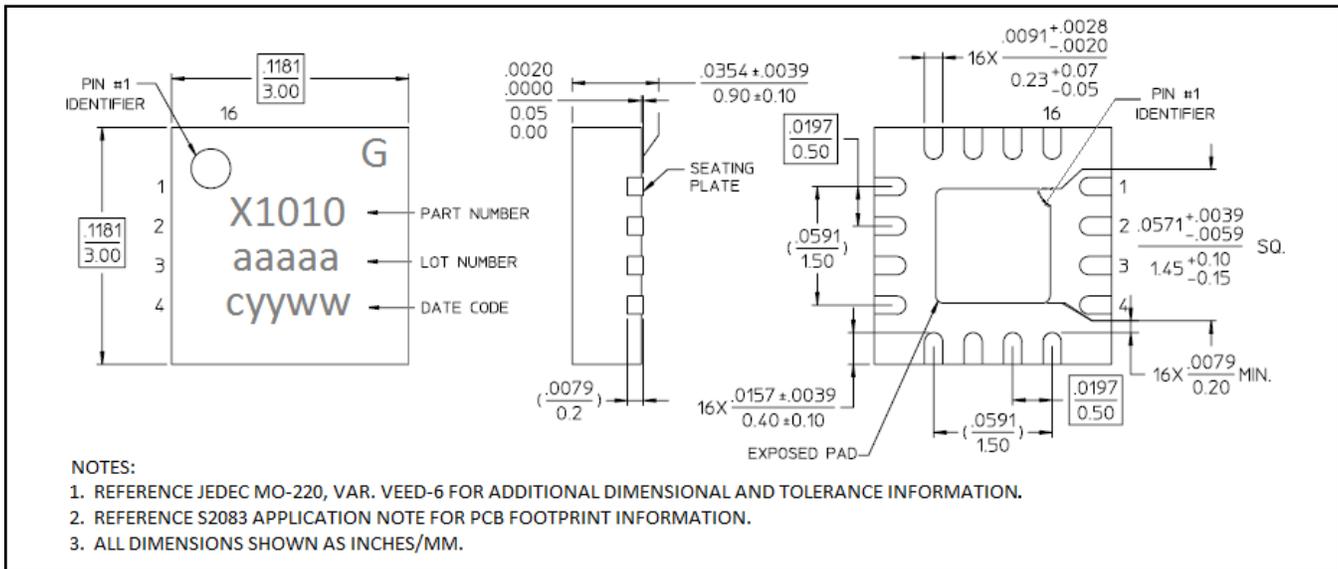

† Reference Application Note S2083 for lead-free solder reflow recommendations.  
Meets JEDEC moisture sensitivity level 1 requirements.  
Plating is 100% matte tin over copper.