

SS2020FL~SS20100FL

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE 20 to 100 Volts **CURRENT** 2.0 Amperes



SOD-123FL Unit: inch (mm)

FEATURES

- Fast switching speed
- Surface mount package ideally suited for automatic insertion
- Low power loss, high efficiency
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: SOD-123FL, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0168 gram
- Polarity : Color band cathode

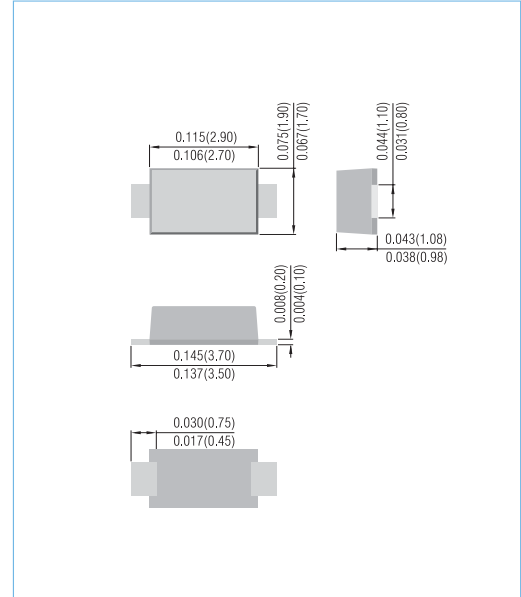

ABSOLUTE RATINGS

PARAMETER	SYMBOL	SS2020FL	SS2030FL	SS2040FL	SS2060FL	SS20100FL	UNITS
Marking Code		GM	GN	GP	GQ	GR	
Reverse Voltage	V_R	20	30	40	60	100	V
Peak Reverse Voltage	V_{RRM}	20	30	40	60	100	V
Average Rectified Current at $T_A=75^\circ\text{C}$	$I_{F(AV)}$	2.0					A
Non-repetitive Peak Forward Surge Current at $t=8.3\text{ms}$	I_{FSM}	50					A

ELECTRICAL AND THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	SS2020FL	SS2030FL	SS2040FL	SS2060FL	SS20100FL	UNITS
Minimum Reverse Breakdown Voltage at $I_R=500\mu\text{A}$	V_R	20	30	40	60	100	V
Maximum Forward Voltage at $I_F=2.0\text{A}$	V_F	0.55			0.70	0.85	V
Reverse Leakage Current at V_{RRM}	I_R	500					μA
Typical Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	60					$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-50 to +125					$^\circ\text{C}$

Note.1 Mounted with minimum recommended pad size, PC Board FR4.

2. $T_A=25^\circ\text{C}$ unless otherwise specified.

SS2020FL~SS20100FL

Rating and Characteristic Curves

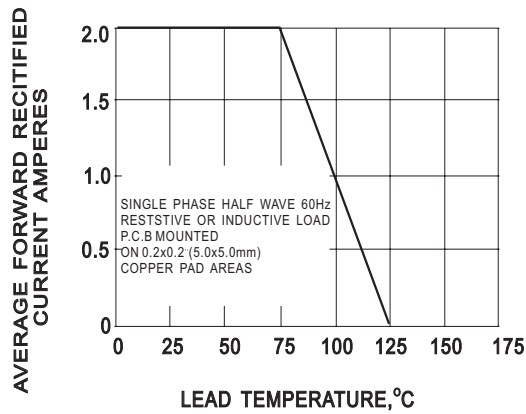


FIG. 1-FORWARD CURRENT DERATING CURVE

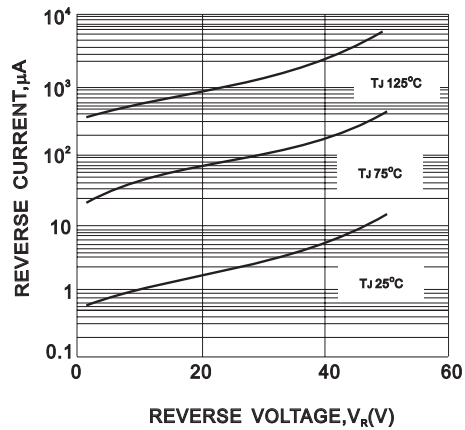


FIG. 2-TYPICAL REVERSE CHARACTERISTIC

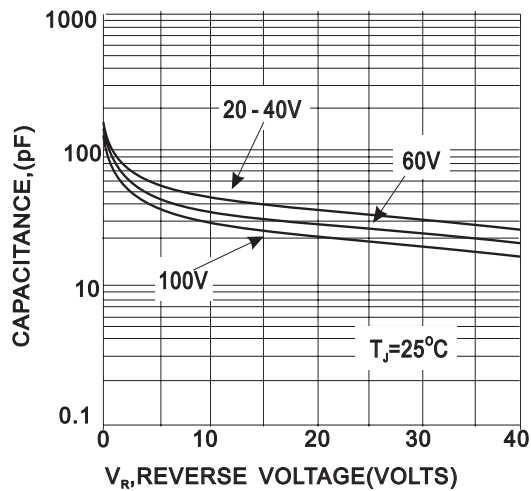


FIG. 3-TYPICAL JUNCTION CHARACTERISTIC

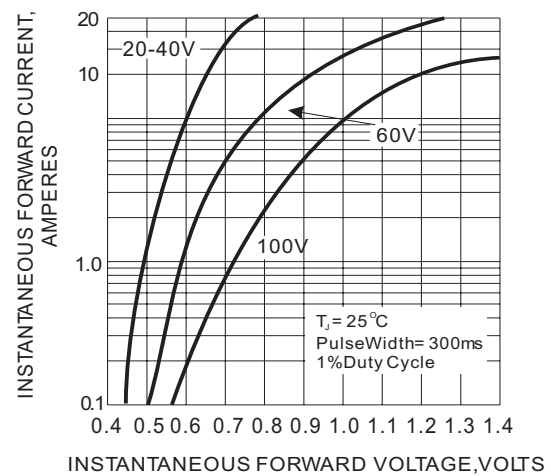



FIG. 4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

SS2020FL~SS20100FL

MOUNTING PAD LAYOUT

SOD-123FL

Unit: inch (mm)

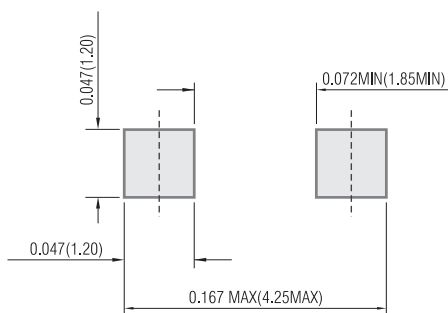

ORDER INFORMATION

- Packing information
 - T/R - 10K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.