

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free


FEATURES

TO-92

- General Purpose Switching and Amplification.


CLASSIFICATION OF h_{FE} (1)

Product-Rank	8550SST-B	8550SST-C	8550SST-D
Range	85~160	120~200	160~300

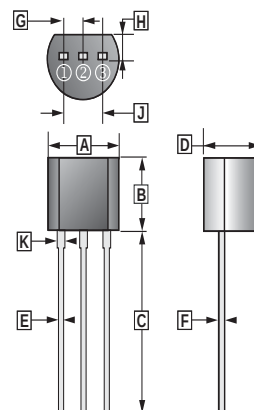

① Emitter
② Collector
③ Base

REF.	Millimeter	
	Min.	Max.
A	4.40	4.70
B	4.30	4.70
C	12.70	-
D	3.30	3.81
E	0.36	0.56
F	0.36	0.51
G	1.27 TYP.	
H	1.10	-
J	2.42	2.66
K	0.36	0.76



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-40	V
Collector to Emitter Voltage	V_{CEO}	-25	V
Emitter to Base Voltage	V_{EBO}	-5	V
Collector Current - Continuous	I_C	-1.5	A
Collector Power Dissipation	P_C	1	W
Thermal Resistance From Junction to Ambient	$R_{\theta JA}$	125	$^\circ\text{C} / \text{W}$
Junction, Storage Temperature	T_J, T_{STG}	150, -55~150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test condition
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	-40	-	-	V	$I_C = -0.1\text{mA}, I_E = 0$
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	-25	-	-	V	$I_C = -0.1\text{mA}, I_B = 0$
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	-5	-	-	V	$I_E = -0.1\text{mA}, I_C = 0$
Collector Cut-Off Current	I_{CBO}	-	-	-0.1	μA	$V_{CB} = -40\text{V}, I_E = 0$
Collector Cut-Off Current	I_{CEO}	-	-	-0.1	μA	$V_{CE} = -20\text{V}, I_B = 0$
Emitter Cut-Off Current	I_{EBO}	-	-	-0.1	μA	$V_{EB} = -5\text{V}, I_C = 0$
DC Current Gain	$h_{FE(1)}$	85	-	300		$V_{CE} = -1\text{V}, I_C = -100\text{mA}$
	$h_{FE(2)}$	40	-	-		$V_{CE} = -1\text{V}, I_C = -800\text{mA}$
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	-	-	-0.5	V	$I_C = -800\text{mA}, I_B = -80\text{mA}$
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	-	-	-1.2	V	$I_C = -800\text{mA}, I_B = -80\text{mA}$
Transition Frequency	f_T	100	-	-	MHz	$V_{CE} = -10\text{V}, I_C = -50\text{mA}, f = 30\text{MHz}$

RATINGS AND CHARACTERISTIC CURVES

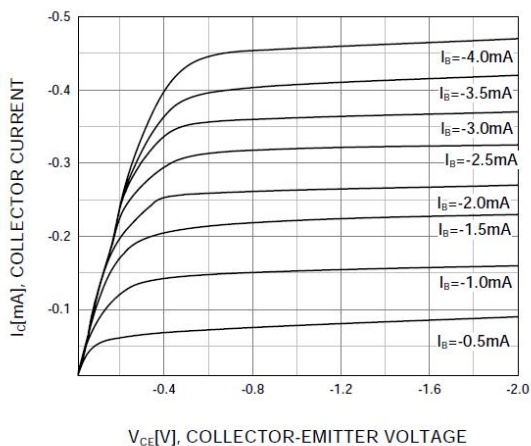


Figure 1. Static Characteristic

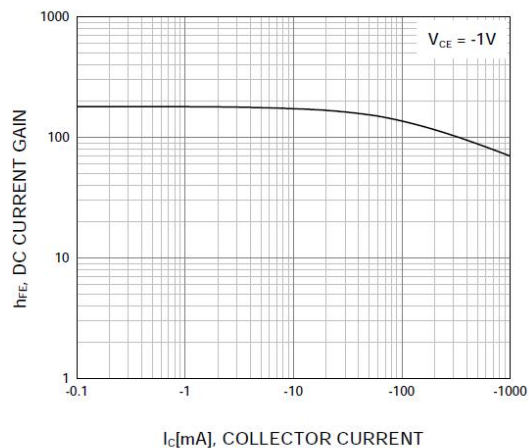


Figure 2. DC current Gain

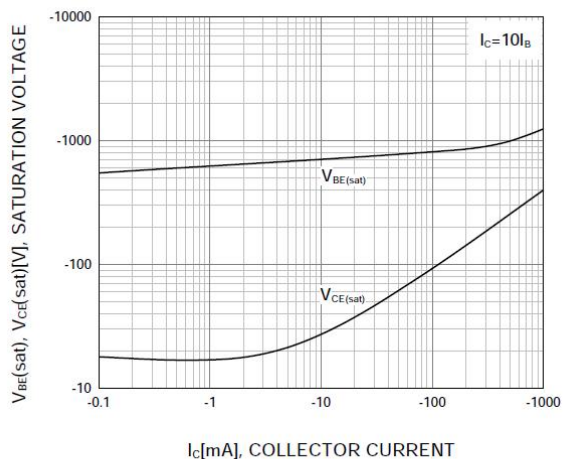


Figure 3. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

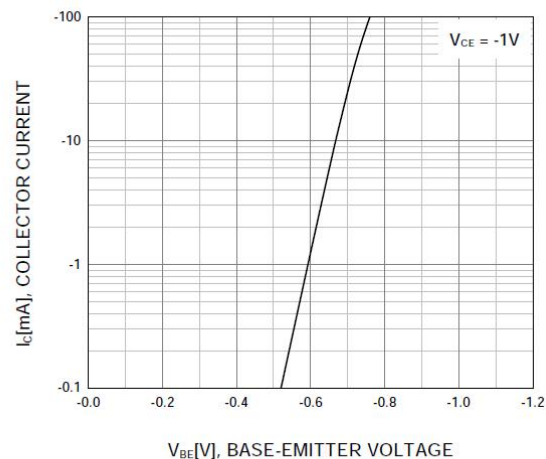


Figure 4. Base-Emitter On Voltage

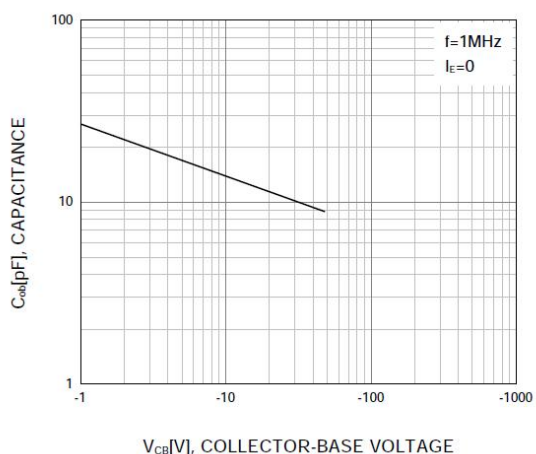


Figure 5. Collector Output Capacitance

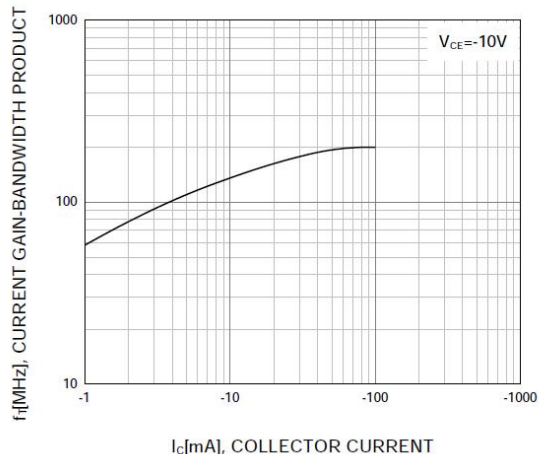


Figure 6. Current Gain Bandwidth Product