

BC237/238/239

NPN EPITAXIAL SILICON TRANSISTOR


SWITCHING AND AMPLIFIER APPLICATIONS

- LOW NOISE: BC239

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Emitter Voltage	V _{CE}		V
: BC237		50	V
: BC238/239		30	
Collector-Emitter Voltage	V _{CEO}		V
: BC237		45	V
: BC238/239		25	V
Emitter-Base Voltage	V _{EBO}		V
: BC237		6	V
: BC238/239		5	V
Collector Current (DC)	I _C	100	mA
Collector Dissipation	P _C	500	mW
Junction Temperature	T _J	150	°C
Storage Temperature	T _{STG}	-55 ~ 150	°C

TO-92



1. Collector 2. Base 3. Emitter


ELECTRICAL CHARACTERISTICS (T_A=25°C)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Emitter Breakdown Voltage	BV _{CEO}	I _C =2mA, I _B =0	45			V
: BC237			25			V
: BC238/239						
Emitter Base Breakdown Voltage	BV _{EBO}	I _E =1μA, I _C =0	6			V
: BC237			5			V
: BC238/239						
Collector Cut-off Current	I _{CES}	V _{CE} =50V, I _B =0		0.2	15	nA
: BC237		V _{CE} =30V, I _B =0		0.2	15	nA
: BC238/239		V _{CE} =5V, I _C =2mA	120		800	
DC Current Gain	h _{FE}	I _C =10mA, I _B =0.5mA		0.07	0.2	V
Collector-Emitter Saturation Voltage	V _{CE} (sat)	I _C =100mA, I _B =5mA		0.2	0.6	V
Collector Base Saturation Voltage	V _{BE} (sat)	I _C =10mA, I _B =0.5mA		0.73	0.83	V
		I _C =100mA, I _B =5mA		0.87	1.05	V
Base Emitter On Voltage	V _{BE} (on)	V _{CE} =5V, I _C =2mA	0.55	0.62	0.7	V
Current Gain Bandwidth Product	f _T	V _{CE} =3V, I _C =0.5mA		85		MHz
		V _{CE} =5V, I _C =10mA	150	250		MHz
Collector Base Capacitance	C _{CBO}	V _{CB} =10V, f=1MHz		3.5	6	pF
Emitter Base Capacitance	C _{EBO}	V _{EB} =0.5V, f=1MHz		8		pF
Noise Figure	NF	V _{CE} =5V, I _C =0.2mA, f=1KHz R _G =2kohm		2	10	dB
: BC237/238		V _{CE} =5V, I _C =0.2mA, R _G =2kohm, f=30-15KHz			4	dB
: BC239					4	dB


h_{FE} CLASSIFICATION

Classification	A	B	C
h _{FE}	120-220	180-460	380-800


STATIC CHARACTERISTIC

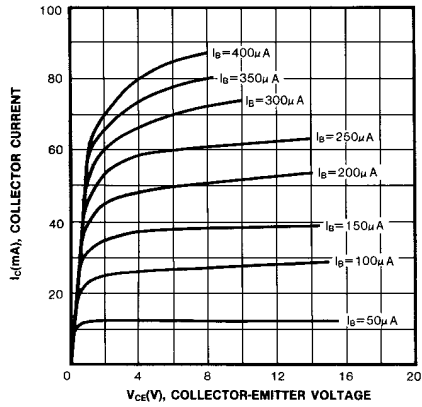


TRANSFER CHARACTERISTIC

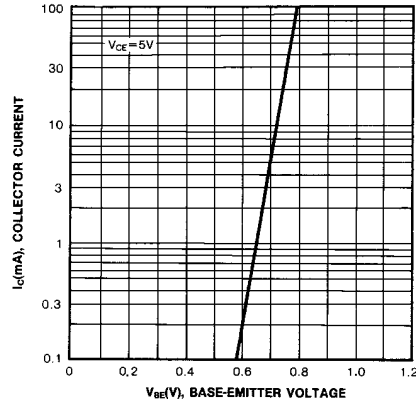


DC CURRENT GAIN

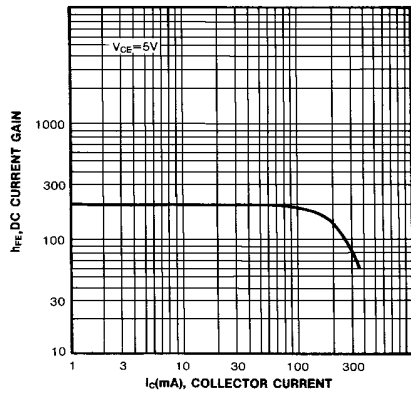


CURRENT GAIN BANDWIDTH PRODUCT

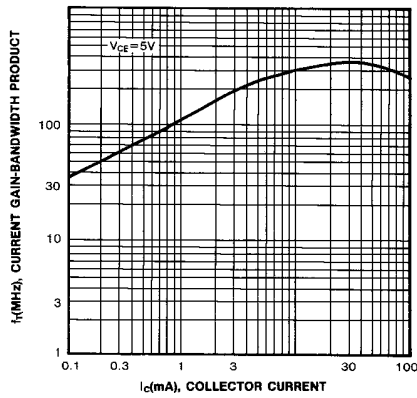

BASE-EMITTER SATURATION VOLTAGE
COLLECTOR-EMITTER SATURATION VOLTAGE

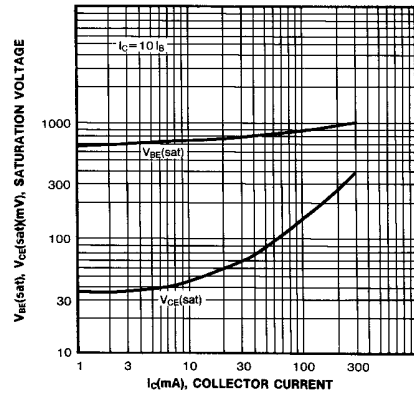

OUTPUT CAPACITANCE

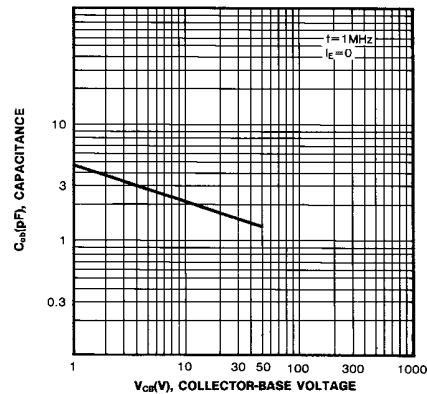

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	ISOPLANAR™
CoolFET™	MICROWIRE™
CROSSVOLT™	POP™
E ² CMOS™	PowerTrench™
FACT™	QS™
FACT Quiet Series™	Quiet Series™
FAST®	SuperSOT™-3
FASTr™	SuperSOT™-6
GTO™	SuperSOT™-8
HiSeC™	TinyLogic™

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.