



EG-530AD (電子ガバナモータ)

Electronic governor motors

代表的用途／音響・映像機器
●カセットテープレコーダー

Typical Applications / Audio and Visual Equipments
●Cassette Tape Recorder



MODEL	RATED VOLTAGE V	WORKING VOLTAGE V	RATED LOAD		RATED SPEED r/min	RATED LOAD CURRENT mA(TYP)	LOAD FLUCTUATION(TYP)	STARTING TORQUE(MIN)	
			g·cm	mN·m			r/min / g·cm	g·cm	mN·m
EG-530AD-6F(6B)	6	4.2 ~ 7.5	8.0	0.78	2400±2%	132	9.0	38at4.2V	3.72at4.2V
EG-530AD-9F(9B)	9	6 ~ 11	8.0	0.78	2400±2%	92	9.0	50at6.0V	4.90at6.0V
EG-530AD-2F(2B)	12	8.4 ~ 15	8.0	0.78	2400±2%	73	9.0	60at8.4V	5.88at8.4V

FA

FF

FC

FK

RE

RF

RD

RC

RK

RS

SU

SH


FK

RT

CO


EG

JC/LC

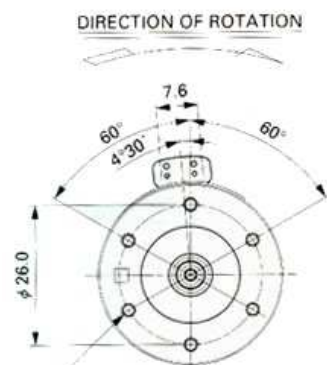


JIS M2.6x0.45 TAPPED HOLE
6 PLACES

取付けネジはモータケース面より1.8以下
Usable male screw length 1.8 max. from motor mounting surface.

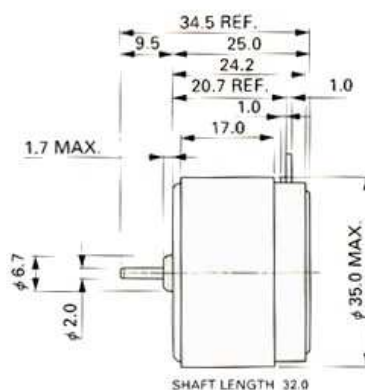

UNIT: MILLIMETERS



WEIGHT: 70g (APPROX)

EG-530AD-9F(9B)

6.0V/9.0V/11.0V

EG-530AD-2F(2B)

8.4V/12.0V/15.0V

