


GRID CONTROL RECTIFIER TUBE



TANTALUM ANODE AND XENON GAS FILLING

Maximum Rated Anode Current	
D-c. Meter Value-Continuous	1.0 amp
Averaging Time	4.5 secs
Oscillograph Peak-Continuously recurring	8.0 amps
Max. Instantaneous Short Circuit Current (0.1 sec.)	77 amps

Peak Forward Voltage (Max. Instantaneous)	1000 volts
Peak Inverse Voltage (Max. Instantaneous)	1250 volts

Max. Commutation Factor (Vusec x A/usec)	0.15
at a maximum initial inverse voltage of 500 volts	

Filament	
Voltage	2.5 volts
Current	6.3 ± 0.8 amps
Heating Time (minimum)	25 secs

Average Arc Drop	
Average Tube	8 volts
Highest Tube at end of life	14 volts

Anode Starting Voltage (D. C.) @ +4V d-c. grid voltage	
Average Tube	25 volts
Highest Tube	75 volts

Grid Characteristics	
Critical Grid Voltage @ 1000 p.f.v.	-4.5 ± 2.0 volts
Critical Grid Current	Less than 5 uamps
Grid-Anode Capacitance	approx. 1 uuf
Grid-Filament Capacitance	approx. 10 uuf

Maximum Negative Grid Voltage	100 volts
-------------------------------	-----------

Deionization Time	Less than 500 usecs
-------------------	---------------------

Ambient Temperature Limits	-55° to $+75^{\circ}$ C
----------------------------	----------------------------------

Mounting Position	Any
-------------------	-----


Overall Dimensions	1-9/16" x 4-1/4" max.
Weight	3 ozs.

Connections	
Filament, Grid, and Anode	Metal medium 4-pin bayonet base A4-10

The filament must be lit before drawing d-c. load current.

The anode is designed to operate at red heat when under full load. All of the above values are for returns to the filament transformer center tap.

The Engineering Manual contains additional information which should be considered in the circuit design.

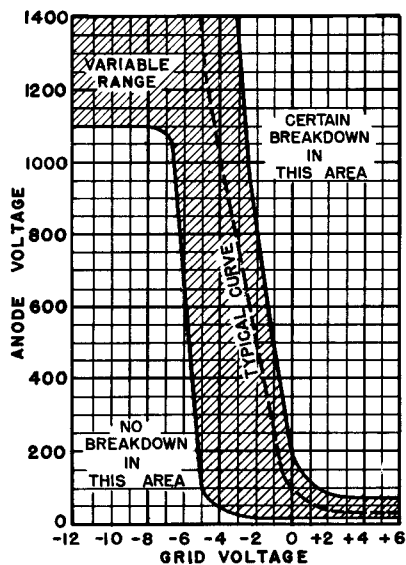

ELECTRONS, INCORPORATED
127 Sussex Avenue
Newark 3, New Jersey