

Voltage Detector, High-Precision


Description

The EM6352 is an ultra-low current voltage detector available in a large variety of configurations and very small packages for maximum flexibility in all end-applications up to 125°C and using power supplies between 1.5V and 5.5V.


This circuit monitors the supply voltage of any electronic system, and generates the appropriate reset signal without a delay time. The threshold defines the minimum allowed voltage which guarantees the good functionality of the system. As long as V_{DD} stays above the threshold voltage, the output stays inactive. If V_{DD} drops below V_{TH} , the output goes active. The output is guaranteed to be in the correct state for V_{DD} down to 0.8V. There are 12 reset threshold voltages starting as low as 1.31V and up to 4.63V. The EM6352 features three output types: active-low push-pull, active-low open-drain and active-high push-pull.

Small SOT23 package as well as ultra-low supply current of 2.7µA makes the EM6352 an ideal choice for portable and battery-operated devices.

Typical Application



Pin Configuration (top view)



Features

- □ Ultra-low supply current of 2.7µA (V_{DD}=3.3V)
- □ Operating temperature range: -40°C to +125°C
- □ 12 reset threshold voltages V_{TH}: 4.63V, 4.4V, 3.08V, 2.93V, 2.63V, 2.26V, 2.2V, 1.8V, 1.66V, 1.57V, 1.38V, 1.31V
- 3 reset output options:

Active-low RESET push-pull

Active-low RESET open-drain


Active-high RESET push-pull

- No external components
- Immune to short negative V_{DD} transients
- Guaranteed Reset valid down to 0.8V
- ☐ Threshold hysteresis: 2.1% of V_{TH}
- □ Very small SOT23-5L, SOT23-3L packages

Applications

- Mobile and cordless phones
- Modems
- Printers
- □ TV, VCR, Video sets
- □ GPS
- □ Toys
- Basestations
- NiCd cell battery

Block Diagram




Pin Description

Pin		N	Franctica		
SOT23-5L	SOT23-3L	Name	Function		
1	1	RESET	Active-low RESET output. RESET remains low while V _{DD} is below the reset threshold voltage.		
I	'	RESET	Active-high RESET output. RESET remains high while V_{DD} is below the reset threshold voltage.		
2	3	V_{DD}	Supply Voltage (5.5V max.)		
3	2	GND	Ground		
4, 5	=	N.C.	Not connected. Not internally connected		

1



Ordering Information

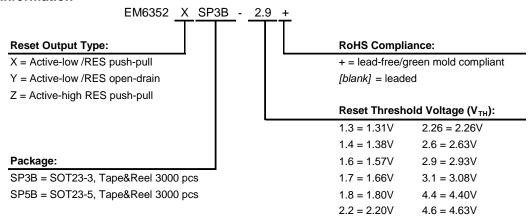

Note: subject to availability (see standard versions list below). Please give complete Part Number when ordering.

Standard Versions (Top Marking)

Part Number	Top Marking ¹⁾	Top Marking ²⁾ With 4 Characters
EM6352XSP3B-2.6+	KP##	BKAG
EM6352XSP3B-2.2+	K5##	BKAF

- 1) Top marking is the standard from 2006. No bottom marking exists. Where ## refers to the lot number (EM internal reference only)
- Top marking with 4 characters is standard from 2003. For lead-free/green mold (RoHS) parts, the first letter of top marking with 4 characters begins with letter "B" instead of letter "A". Bottom marking indicates the lot number.

Standard Versions (Samples)

Part Number
EM6352XSP3B-2.2+
EM6352XSP3B-2.6+

Sample stock is generally held on **standard versions** only. Please contact factory for other versions not shown here and for availability of non standard versions.



Absolute Maximum Ratings

Parameter	Symbol	Conditions			
Voltage at V _{DD} to GND	V_{DD}	-0.3V to +6V			
Minimum voltage at any signal pin	V _{MIN}	GND - 0.3V			
Maximum voltage at any signal pin	V_{MAX}	V _{DD} + 0.3V			
Electrostatic discharge max. to MIL-STD-883C method 3015.7 with ref. to Vss	V _{ESD}	2000V			
Max. soldering conditions	T _{MAX}	250°C x 10s			
Storage Temperature Range	T _{STG}	-65°C to +150°C			

Stresses above these listed maximum ratings may cause permanent damages to the device. Exposure beyond specified operating conditions may affect device reliability or cause malfunction.

Handling Procedures

This device has built-in protection against high static voltages or electric fields; however, anti-static precautions must be taken as for any other CMOS component. Unless otherwise specified, proper operation can only occur when all terminal voltages are kept within the voltage range. Unused inputs must always be tied to a defined logic voltage level.

Operating Conditions

Parameter	Symbol	Min	Max	Unit
Supply voltage (note 1)	V_{DD}	0.8	5.5	V
Operating Temperature	TA	-40	+125	°C

Electrical Characteristics

Unless otherwise specified: V_{DD}= 0.8V to 5.5V, T_A=+25°C (note 1).

Parameter	Symbol	Conditions		Min	Тур	Max	Unit
Supply current (note 2)	IDD	\/ 4.5\/	+25°C	-		4.5	μА
		V _{DD} =1.5V	-40°C to +125°C	-	2.1	7	
		V _{DD} =3.3V	+25°C	-	2.7	5.4	
			-40°C to +125°C	-		8.3	
			+25°C	-	3.2	6.3	
		V _{DD} =5.0V	-40°C to +125°C	-		9.6	
		EM6352 – 1.3		1.290	1.31	1.330	
	V _{TH} -	EM6352 - 1.4		1.359	1.38	1.401	
		EM6352 – 1.6		1.546	1.57	1.594	
		EM6352 – 1.7		1.635	1.66	1.685	
		EM6352 – 1.8		1.773	1.80	1.827	
Threshold voltage		EM6352 – 2.2		2.167	2.20	2.233	V
(note 3)		EM6352 - 2.26		2.226	2.26	2.294	
		EM6352 - 2.6		2.591	2.63	2.669	
		EM6352 - 2.9		2.886	2.93	2.974	
		EM6352 – 3.1		3.034	3.08	3.126	
		EM6352 - 4.4		4.334	4.40	4.466	
		EM6352 - 4.6		4.561	4.63	4.699	
Threshold voltage temperature coefficient (note 4)	$\frac{\Delta V_{TH}}{\Delta T_{A}}$	T _A = -40°C to +125°C		-	±50	-	ppm/°C
Threshold hysteresis	V _{HYS}			-	2.1%•V _{TH}	-	V

Note 1: Production tested at +25°C only. Over temperature limits are guaranteed by design, not production tested. V_{DD} min=0.9V for active-high versions (EM6352Z).

Note 2: RESET (RESET) open.

Note 3: Threshold voltage is specified for V_{DD} falling.

Note 4: Typical variation ΔV_{TH} of V_{TH} at a given temperature T_A is calculated as follows:

$$\Delta V_{TH}(T=T_A) = \frac{\Delta V_{TH}}{\Delta T_A} \times V_{TH} \times \left| T_A - 25^{\circ}C \right|$$

Example:

for version V_{TH}=2.93V, variation at T_A=70°C is equal to ΔV_{TH}(70°C)=±50.10⁻⁶ x 2.93 x (70-25)=±6.59mV



Electrical Characteristics (continued)


Unless otherwise specified: V_{DD} = 0.8V to 5.5V, T_A =+25° C (note 1).

Parameter	Symbol	Conditions			Min	Тур	Max	Unit
Reset timeout period	t _{POR}	V _{DD} from 0V to V _{TH (typ)} +15% (note 2)			9	500	1090	μS
Propagation delay time VDD to RESET (RESET) delay	t₽	V_{DD} drops from $V_{TH\ (typ)}$ +0.2V to $V_{TH\ (typ)}$ -0.2V (note 2)			2	130	255	μS
	Vol	-40°C to +125°C	V _{DD} >1V	I _{OL} =100μA	-	-	0.3	V
Open-drain RESET output Voltage			V _{DD} >2.5V	I _{OL} =1.5mA	-	-	0.3	
			V _{DD} >5V	I _{OL} =3mA	-	-	0.3	
	V _{OL}	-40°C to +125°C	V _{DD} >1V	I _{OL} =100μA	-	-	0.3	- V
			V _{DD} >2.5V	I _{OL} =1.5mA	-	-	0.3	
Push-pull RESET / RESET			V _{DD} >5V	I _{OL} =3mA	-	-	0.3	
Output voltage	Vон	-40°C to +125°C	V _{DD} >1V	Іон=-30μА	0.8	-	-	
			V _{DD} >2.5V	I _{ОН} =-1.5mA	2	-	-	
			V _{DD} >5V	I _{OH} =-3mA	4	-	-	
Output leakage current	ILEAK	-40°C to +125°C, only for EM6352Y (open-drain)			-	-	0.5	μА

Note 1: Production tested at +25°C only. Over temperature limits are guaranteed by design, not production tested. V_{DD} min=0.9V for active-high version (EM6352Z).

Note 2: RESET (RESET) open.

Timing Waveforms

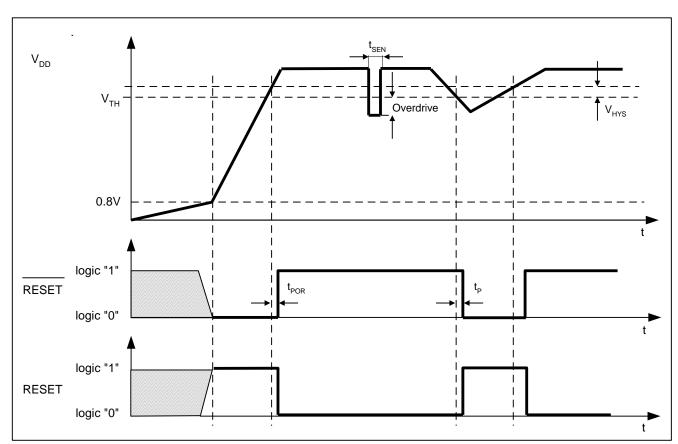


Note 5: t_{SEN} = Maximum Transient Duration. Please refer to figure on next page.

Note 6: Overdrive = V_{TH} - V_{DD} . Please refer to figure on next page.




Typical Operating Characteristics


(Typical values are at T_A=+25°C unless otherwise noted, RESET or RESET open.)









Propagation Time t_P vs. Temperature



Reset Timeout Period tPOR vs. Temperature




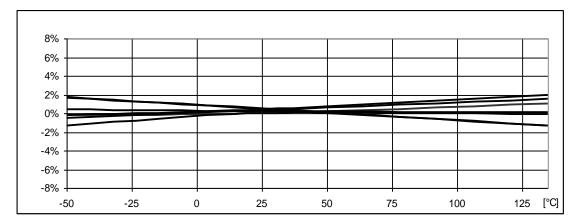


Threshold Voltage Variation vs. Temperature (normalized)



Package Information

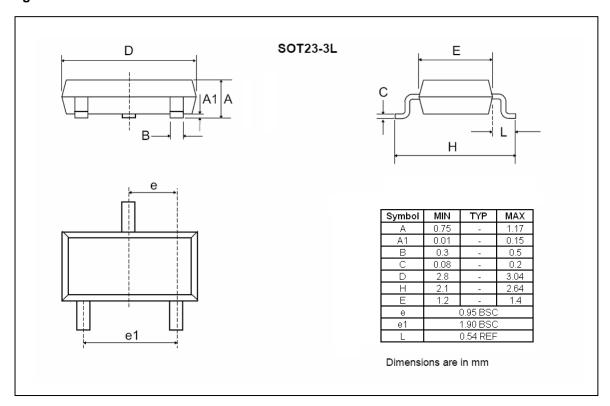

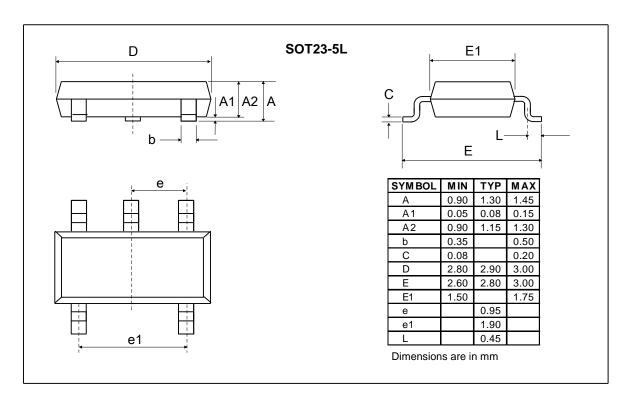



Traceability for small packages

Due to the limited space on the package surface, the bottom marking contains a limited number of characters that provide only partial information for lot traceability. Full information for complete traceability is however provided on the packing labels of the product at delivery from EM. It is highly recommended that the customer insures full lot traceability of EM product in his final product.

EM Microelectronic-Marin SA ("EM") makes no warranties for the use of EM products, other than those expressly contained in EM's applicable General Terms of Sale, located at http://www.emmicroelectronic.com. EM assumes no responsibility for any errors which may have crept into this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein.

No licenses to patents or other intellectual property rights of EM are granted in connection with the sale of EM products, neither expressly nor implicitly.

In respect of the intended use of EM products by customer, customer is solely responsible for observing existing patents and other intellectual property rights of third parties and for obtaining, as the case may be, the necessary licenses.

Important note: The use of EM products as components in medical devices and/or medical applications, including but not limited to, safety and life supporting systems, where malfunction of such EM products might result in damage to and/or injury or death of persons is expressly prohibited, as EM products are neither destined nor qualified for use as components in such medical devices and/or medical applications. The prohibited use of EM products in such medical devices and/or medical applications is exclusively at the risk of the customer

Product qualification is performed according to internal EM quality standards for industrial products. For any special requirement (eg. automotive grade) please contact EM Microelectronic-Marin S.A.