

Features

- Advanced Trench MOS Technology
- 100% EAS Guaranteed
- High Current Capability
- Green Device Available

Applications

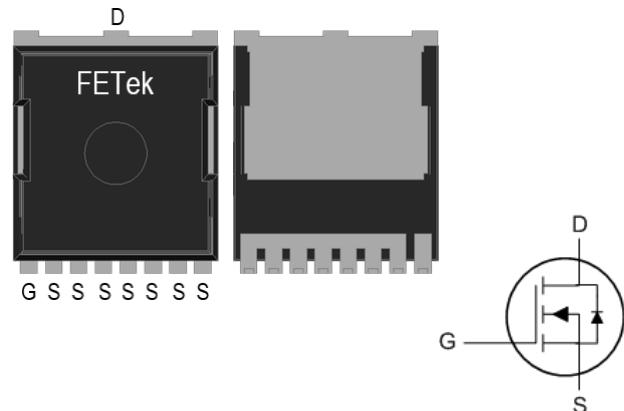
- SMPS Synchronous Rectification
- DC/DC Converters
- Or-ing

Product Summary



BVDSS	RDS(ON)	ID
40V	1.6mΩ	250A

TOLL Pin Configuration



Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	40	V
V _{GS}	Gate-Source Voltage	±20	V
I _D @T _C =25°C	Continuous Drain Current, V _{GS} @ 10V ^{1,6}	250	A
I _D @T _C =100°C	Continuous Drain Current, V _{GS} @ 10V ^{1,6}	158	A
I _D @T _A =25°C	Continuous Drain Current, V _{GS} @ 10V ¹	32	A
I _D @T _A =100°C	Continuous Drain Current, V _{GS} @ 10V ¹	20	A
I _{DM}	Pulsed Drain Current ²	400	A
EAS	Single Pulse Avalanche Energy ³	530	mJ
I _{AS}	Avalanche Current	103	A
P _D @T _C =25°C	Total Power Dissipation ⁴	149	W
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction-Ambient ¹	---	50	°C/W
R _{θJC}	Thermal Resistance Junction-Case ¹	---	0.84	°C/W



FETek Technology Corp.

FKY4086A

N-Ch 40V Fast Switching MOSFETs

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_D=250\mu\text{A}$	40	---	---	V
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=10\text{V}$, $I_D=20\text{A}$	---	1.2	1.6	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_D=250\mu\text{A}$	2	2.8	4	V
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=32\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{\text{DS}}=32\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=55^\circ\text{C}$	---	---	5	
I_{GSS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA
R_g	Gate Resistance	$V_{\text{DS}}=0\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	1.2	---	Ω
Q_g	Total Gate Charge	$V_{\text{DS}}=20\text{V}$, $V_{\text{GS}}=10\text{V}$, $I_D=20\text{A}$	---	108	---	nC
Q_{gs}	Gate-Source Charge		---	25.4	---	
Q_{gd}	Gate-Drain Charge		---	26.8	---	
$T_{\text{d(on)}}$	Turn-On Delay Time	$V_{\text{DD}}=20\text{V}$, $V_{\text{GS}}=10\text{V}$, $R_g=1.5\Omega$, $I_D=20\text{A}$	---	20	---	ns
T_r	Rise Time		---	145	---	
$T_{\text{d(off)}}$	Turn-Off Delay Time		---	55	---	
T_f	Fall Time		---	18	---	
C_{iss}	Input Capacitance	$V_{\text{DS}}=20\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	6601	---	pF
C_{oss}	Output Capacitance		---	2073	---	
C_{rss}	Reverse Transfer Capacitance		---	248	---	

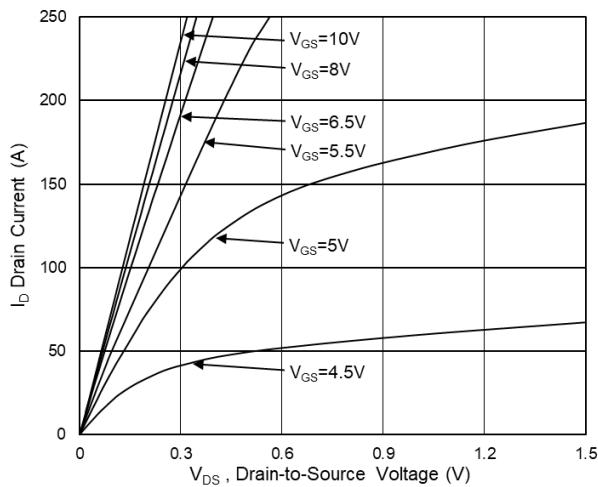
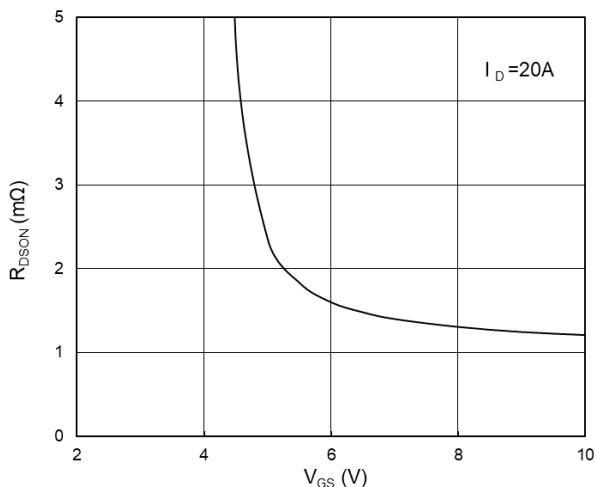
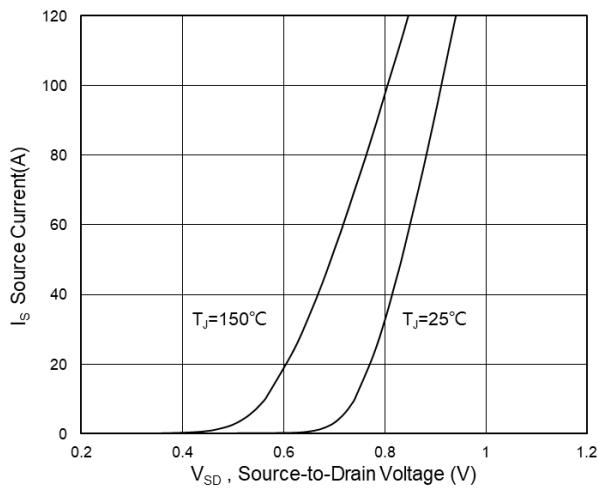
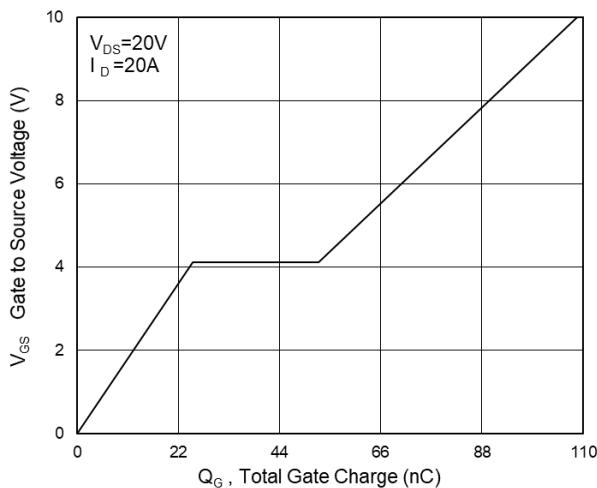
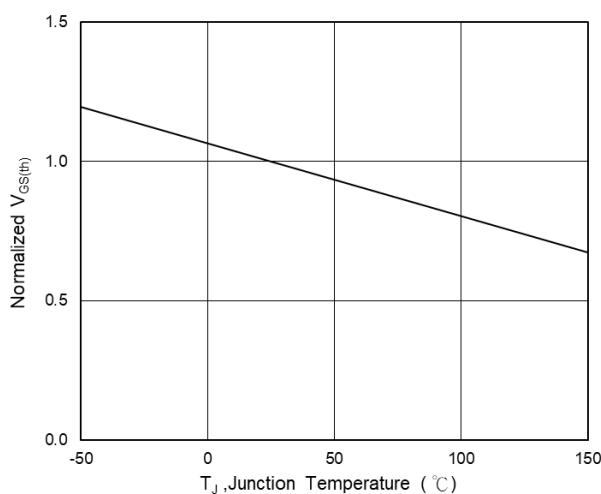
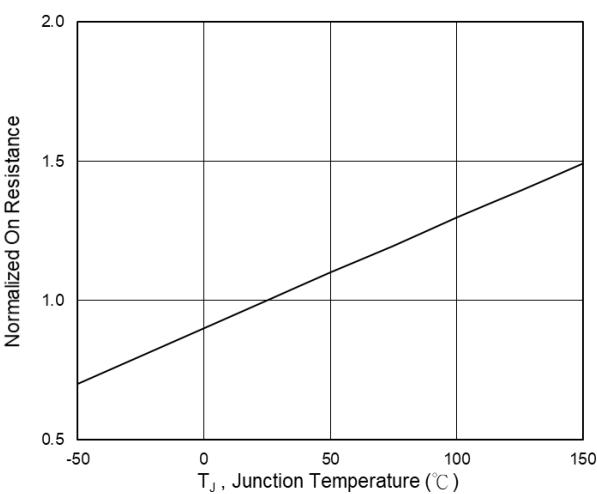
Diode Characteristics

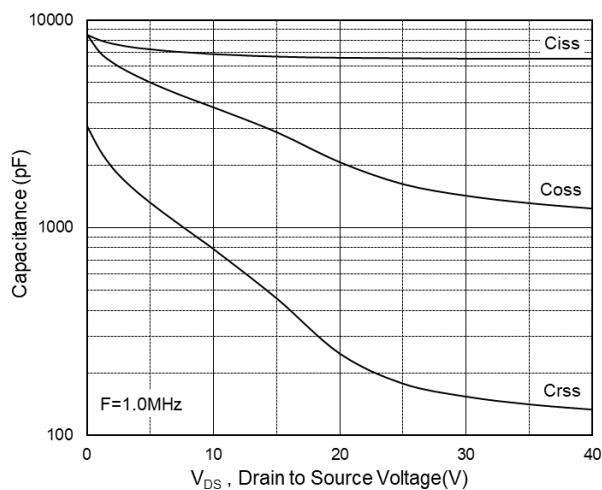
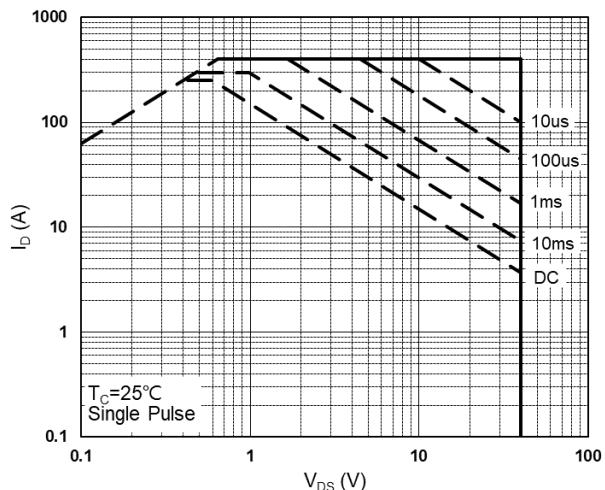
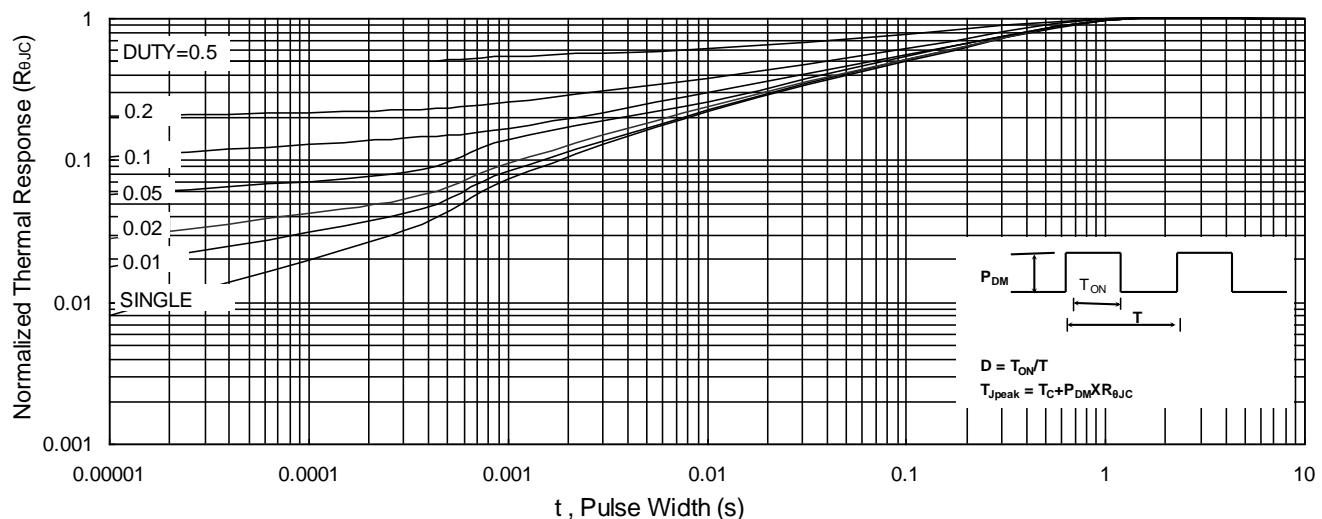
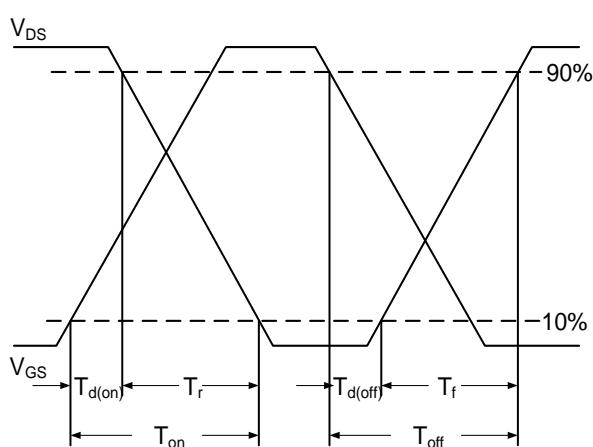
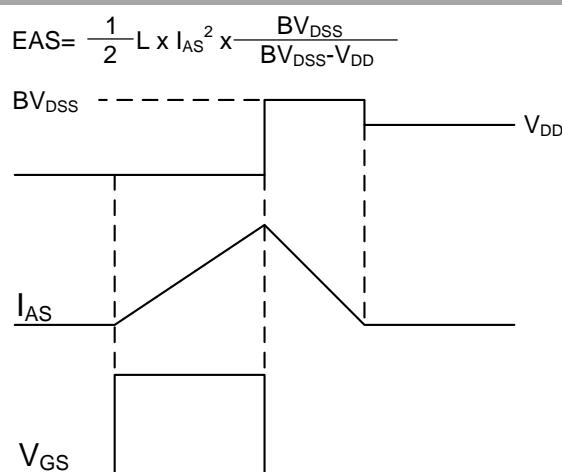
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current ^{1,6}	$V_G=V_D=0\text{V}$, Force Current	---	---	120	A
V_{SD}	Diode Forward Voltage ²	$V_{\text{GS}}=0\text{V}$, $I_s=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1.2	V

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is $V_{\text{DD}}=25\text{V}$, $V_{\text{GS}}=10\text{V}$, $L=0.1\text{mH}$, $I_{\text{AS}}=103\text{A}$
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.
6. Bonding wire limitation current is 120A.

Typical Characteristics


Fig.1 Typical Output Characteristics

Fig.2 On-Resistance vs G-S Voltage

Fig.3 Source Drain Forward Characteristics

Fig.4 Gate-Charge Characteristics

Fig.5 Normalized $V_{GS(th)}$ vs T_J

Fig.6 Normalized $R_{DS(on)}$ vs T_J


Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Fig.10 Switching Time Waveform

Fig.11 Unclamped Inductive Waveform