Fairchild Watch Displays

FLB600506

Optoelectronic Products

Package Outline

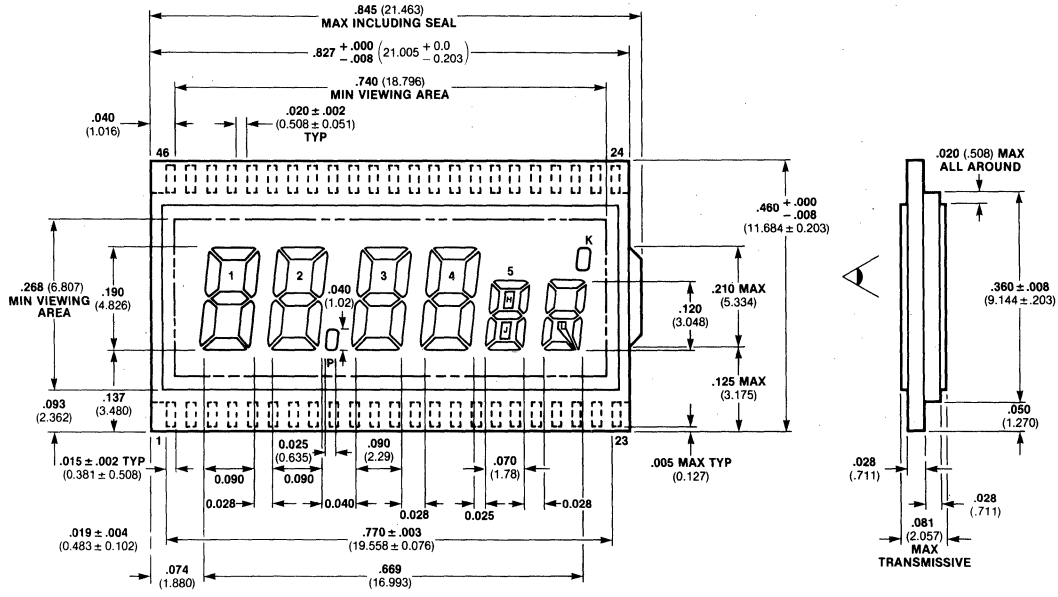

Notes
All dimensions in inches **bold** and millimeters (parentheses)
Tolerance unless specified = ±**.015** (±.381)

Pin Assignments

1 Segment E1	11 Segment E4	21 Segment C6	30 Segment H5	40 Segment B2
2 Segment A/D1	12 Segment D4	22 Segment G6	31 Segment F5	41 Segment A2
3 Segment C1	13 Segment C4	23 Common Backplane	32 Segment G5	42 Segment F2
4 Segment E2	14 Segment E5	24 K	33 Segment B4	43 Segment G2
5 Segment D2	15 Segment J5	25 Segment B6	34 Segment A4	44 Segment B1
6 Segment C2	16 Segment D5	26 Segment A6	35 Segment F4	45 Segment F1
7 Decimal	17 Segment C5	27 Segment F6	36 Segment G4	46 Segment G1
8 Segment E3	18 Segment E6	28 Segment B5	37 Segment B3	
9 Segment A3	19 Segment D6	29 Segment A5	38 Segment F3	
10 Segment C3	20 Segment L6		39 Segment G3	