

2012 Size

869/915 MHz  
Chip Multilayer Coupler

FSLC-S090M-G1


www.DataSheet4U.com

All the technical data and information contained herein are subject to change without notice.




LC-FSLC-S090M-G1-0406A  
www.DataSheet4U.com

## Equivalent Circuits

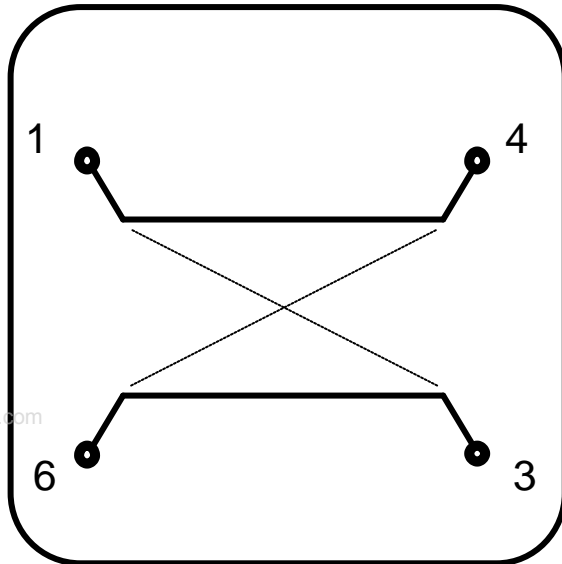

## Shape & Size

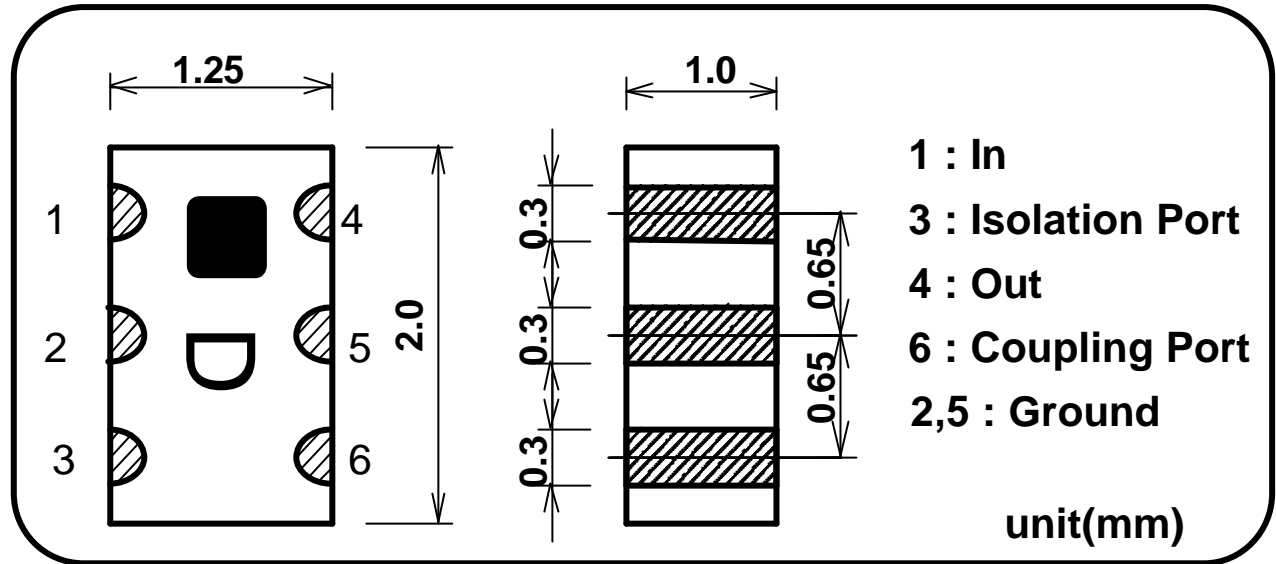


## Specifications

Part Name: FSLC-S090M-G1

Frequency Range	Coupling	Insertion Loss	Isolation	Return Loss	Handling Power	Temperature Range
869-915MHz	19.0 +/- 1.5dB	0.3dB Max. (0.15dB Typ.)	27dB Typ.	17dB Min. (25dB Typ.)	1W Max. (CW)	-35 to +85 deg.C

All the technical data and information contained herein are subject to change without notice.





# FOOT PATTERN

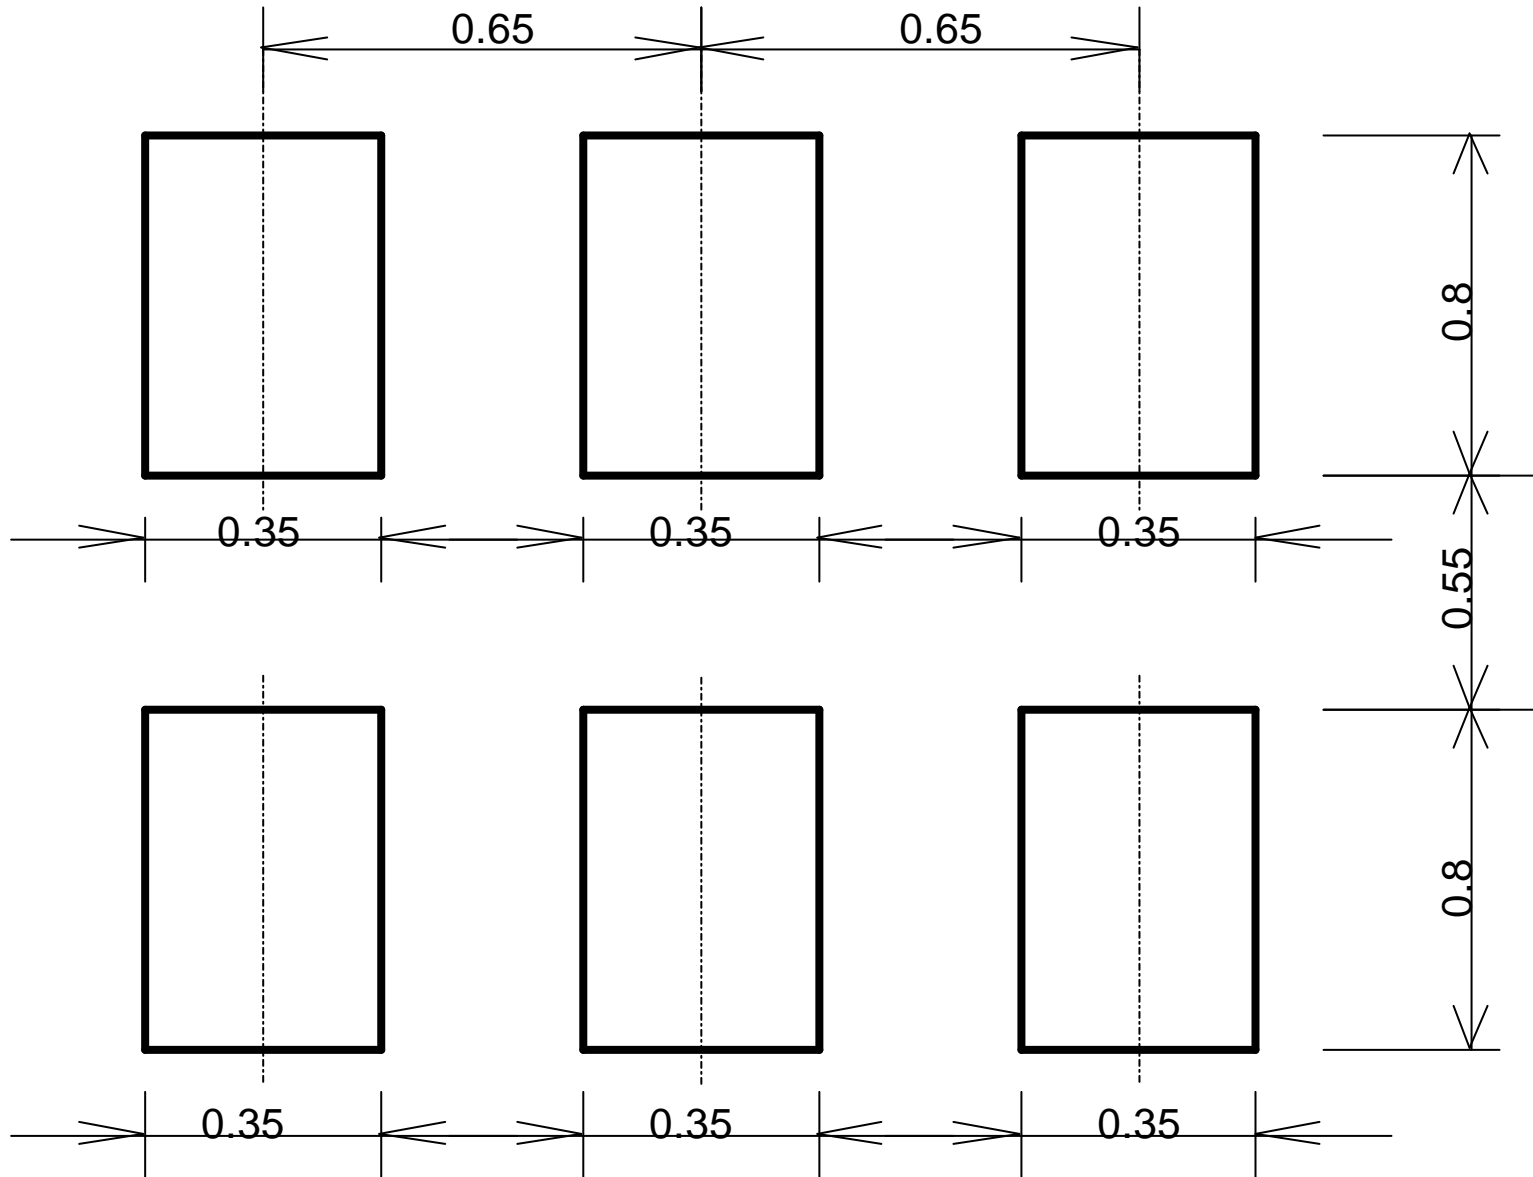

www.DataSheet4U.com

All the technical data and information contained herein are subject to change without notice.

# FSLC-S090M-G1 Sample Data

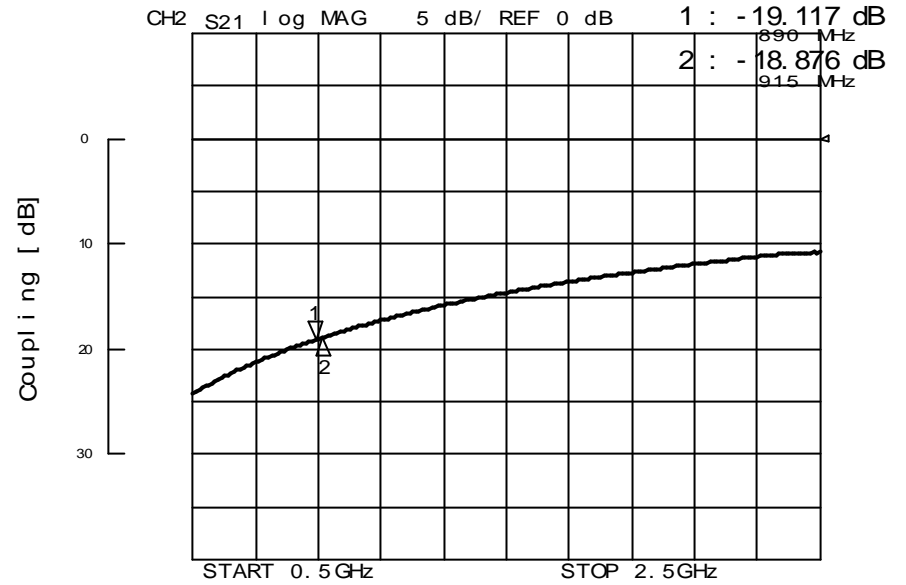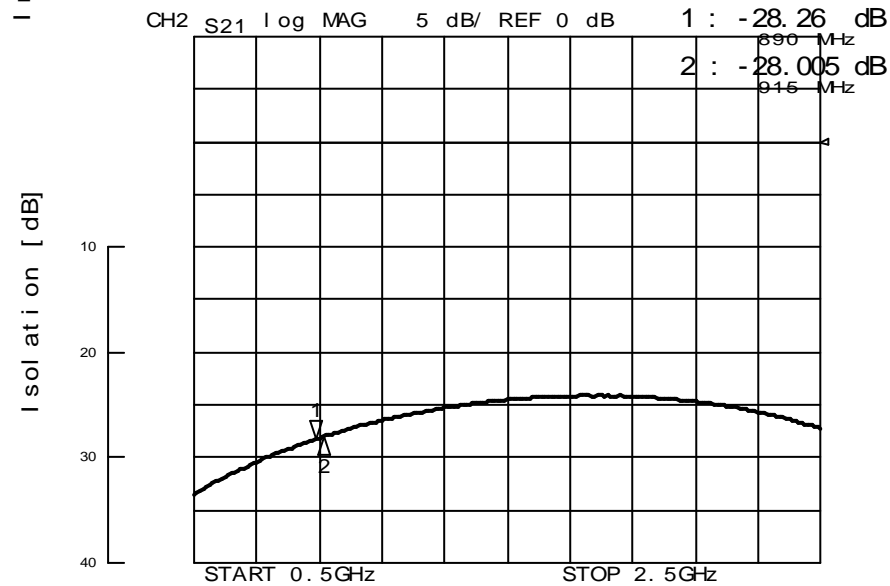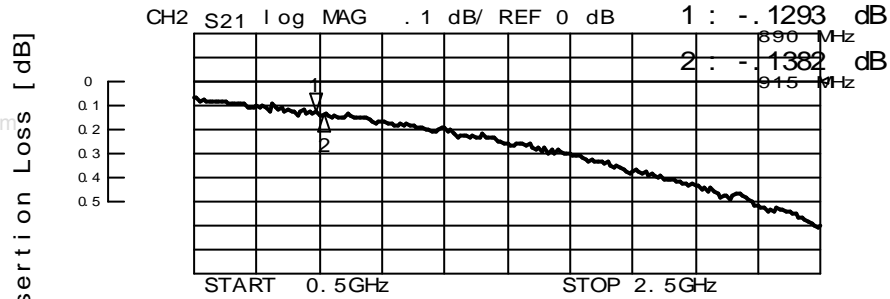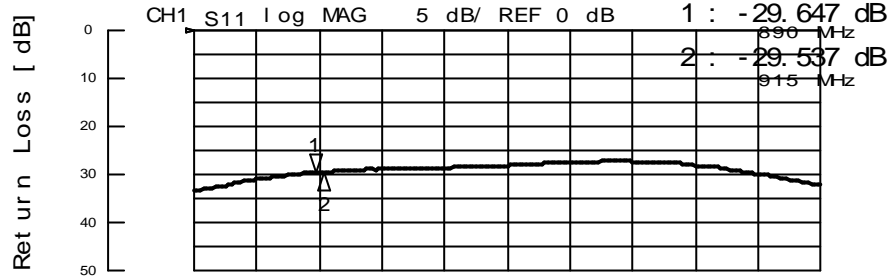

869/915 MHz  
Chip Multilayer Coupler "FSLC-S090M-G1"

