

2012 Size

925/960 MHz
Chip Multilayer Coupler

FSLC-S090M-P1


www.DataSheet4U.com

All the technical data and information contained herein are subject to change without notice.




LC-FSLC-S090M-P1-0406A
www.DataSheet4U.com

Equivalent Circuits

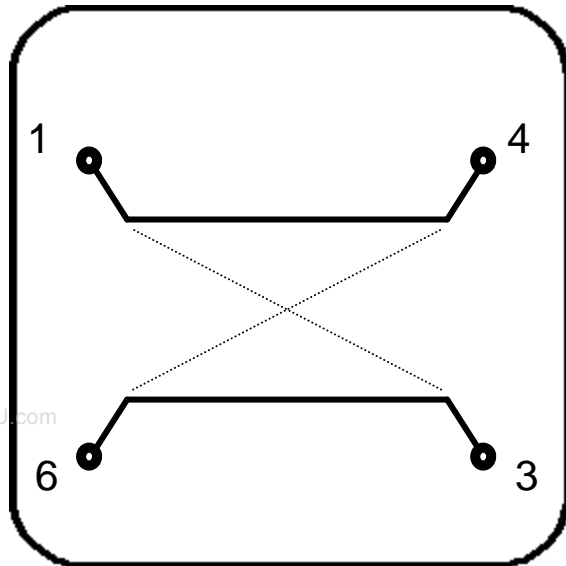

Shape & Size

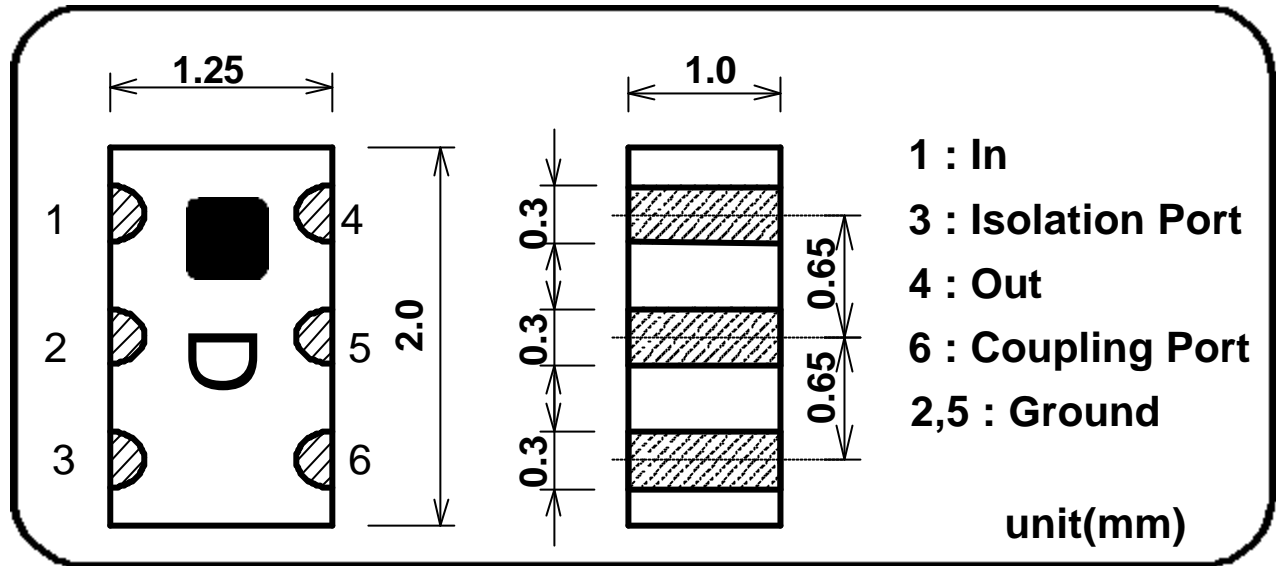


Specifications

Part Name: FSLC-S090M-P1

Frequency Range	Coupling	Insertion Loss	Isolation	Return Loss	Handling Power	Temperature Range
925-960MHz	18.5 +/- 1.5dB	0.3dB Max. (0.15dB Typ.)	27dB Typ.	17dB Min. (25dB Typ.)	1W Max. (CW)	-35 to +85 deg.C

All the technical data and information contained herein are subject to change without notice.

FOOT PATTERN




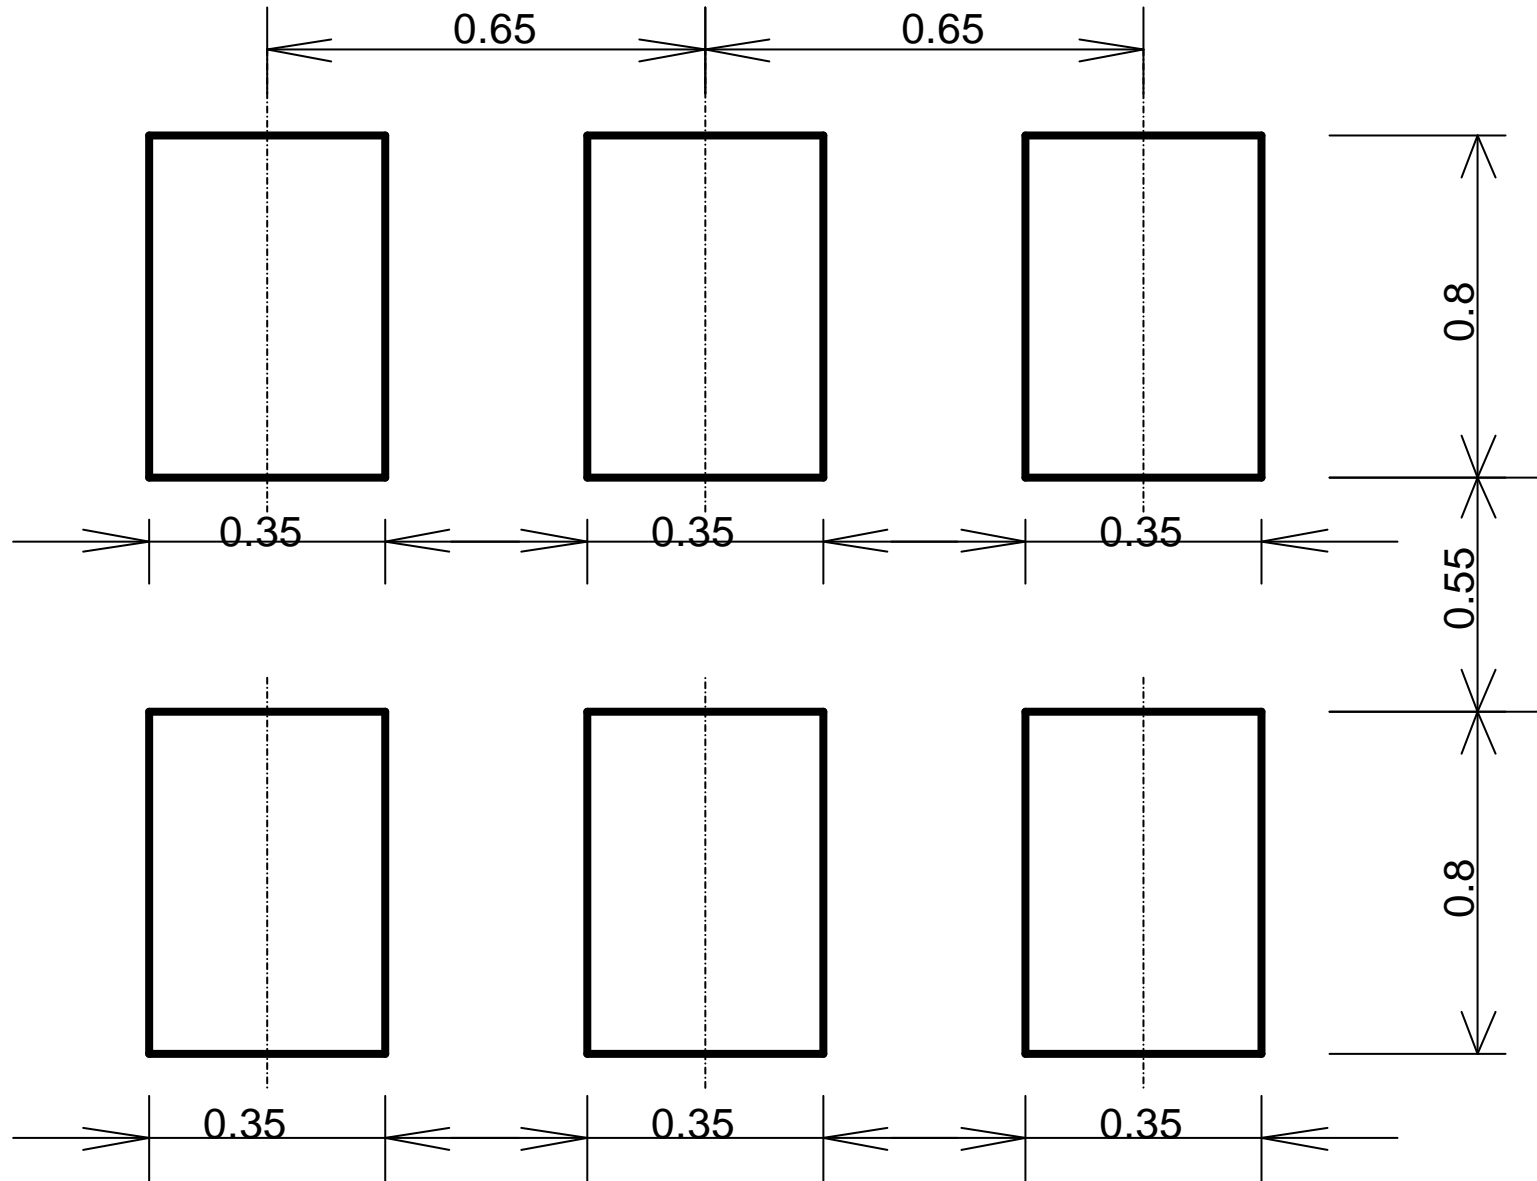


www.DataSheet4U.com

All the technical data and information contained herein are subject to change without notice.

LC-FSLC-S090M-P1-0406A
www.DataSheet4U.com

FSLC-S090M-P1 Sample Data

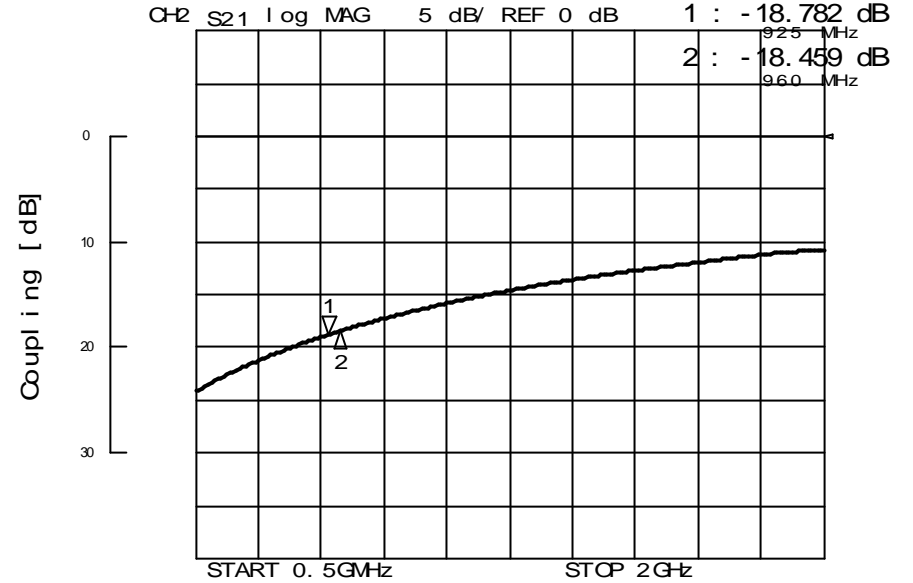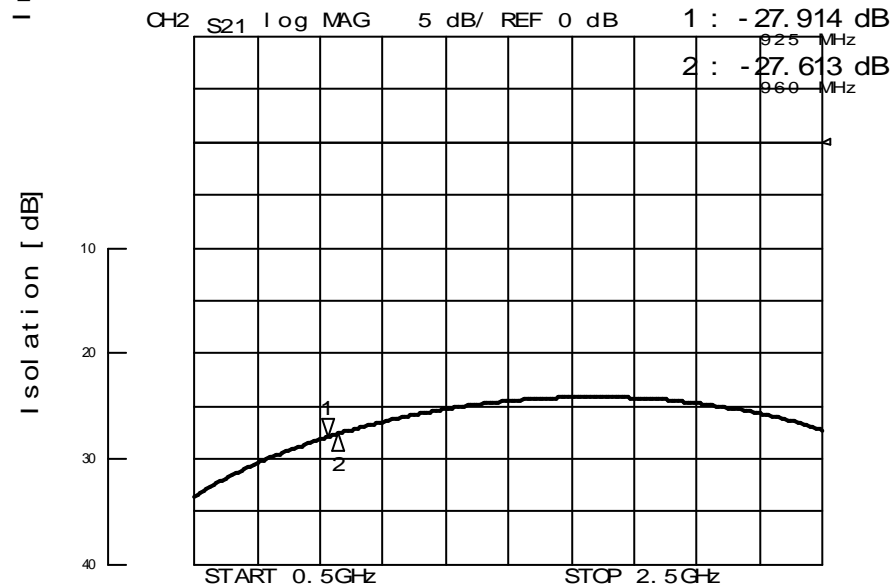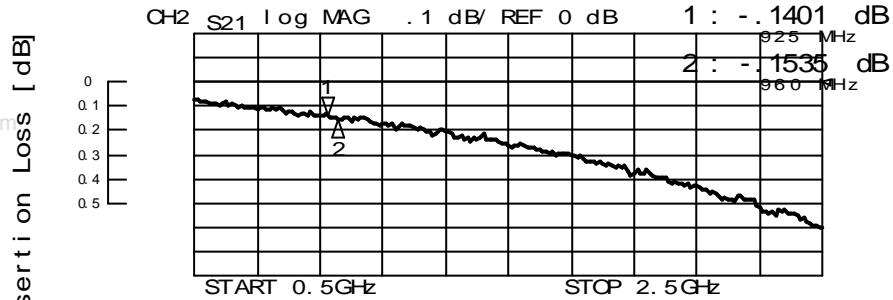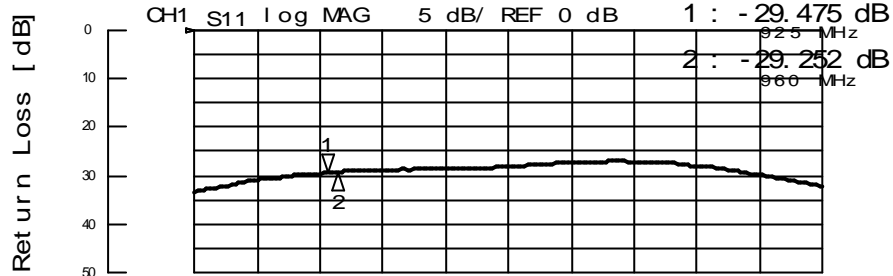

925/960 MHz
 Chip Multilayer Coupler "FSLC-S090M-P1"

