

Honeywell



Representative photograph, actual product appearance may vary.

Due to regional agency approval requirements, some products may not be available in your area. Please contact your regional Honeywell office regarding your product of choice.

HLC1395-001

HLC1395 Series Infrared Reflective Sensor, Short Distance Detection, Transistor Output, Plastic Package

Features

- Side-looking plastic package
- Phototransistor output
- IR emitter and phototransistor detector in a single package
- Low profile for design flexibility
- Designed for short distance detection
- High sensitivity
- Unfocused for sensing diffused surfaces

Description

The HLC1395 is a miniature infrared sensor designed to sense reflective objects at short distances. Both the GaAs IRED and the NPN phototransistor are mounted side-by-side in a single black plastic package with an integral barrier to minimize crosstalk. The sensor is configured with the IRED cathode and the phototransistor emitter connected to a common lead.

The housing consists of an opaque polysulfone outer shell with transfer-molded, IR-transmissive epoxy encapsulant. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

Honeywell

HLC1395-001


HLC1395 Series Infrared Reflective Sensor, Short Distance Detection, Transistor Output, Plastic Package

Product Specifications	
Product Type	IR Switch
On-State Collector Current	0.30 mA
Output	Transistor
Package Components	Plastic
Forward Current	10 mA
Continuous Forward Current	50 mA
Forward Voltage	1.6 V
Reverse Breakdown Voltage	3 V
Reverse Current	10 μ A
Rise and Fall Time	15 ns
Power Dissipation	100 mW
Operating Temperature Range	-40 °C to 85 °C [-40 °F to 185 °F]
Dark Current	100 nA
Collector DC Current	30 mA
Collector-Emitter Breakdown Voltage	30 V
Emitter-Collector Breakdown Voltage	5 V
Collector-Emitter Saturation Voltage	0.4 V
Availability	Global
Product Name	Reflective Sensor
Optimum Point of Response	1,02 mm [0.04 in]

Honeywell

HLC1395-001


HLC1395 Series Infrared Reflective Sensor, Short Distance Detection, Transistor Output, Plastic Package

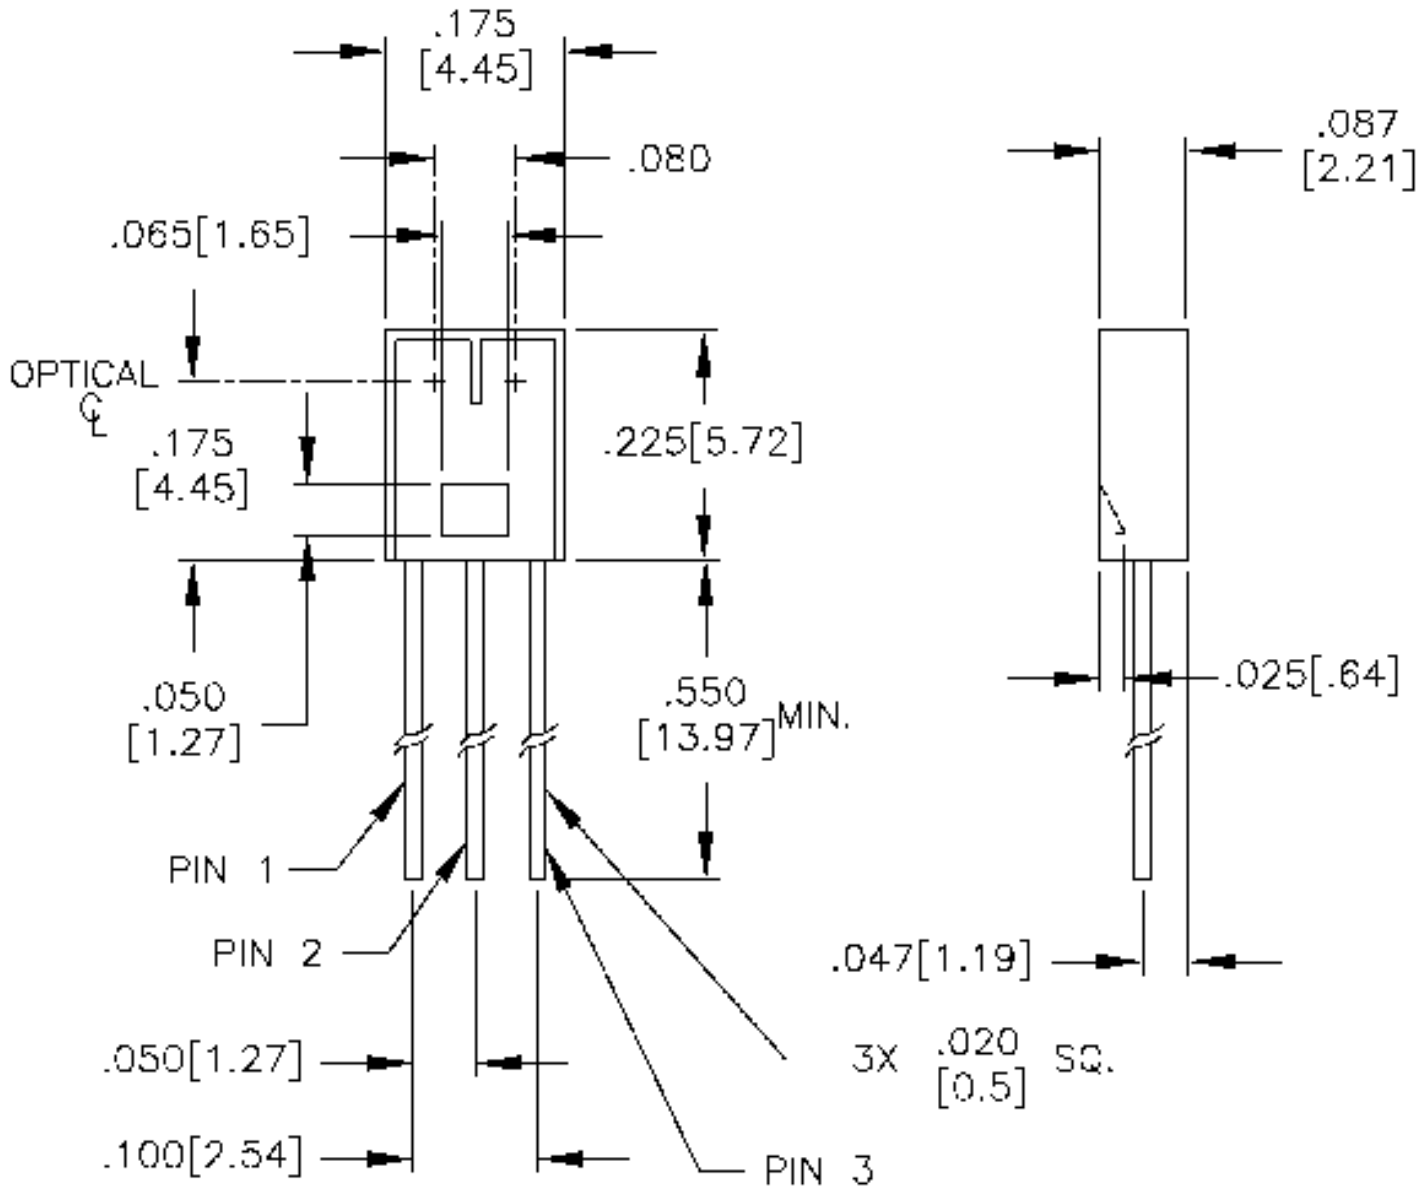

Honeywell

HLC1395-001

HLC1395 Series Infrared Reflective Sensor, Short Distance Detection, Transistor Output, Plastic Package

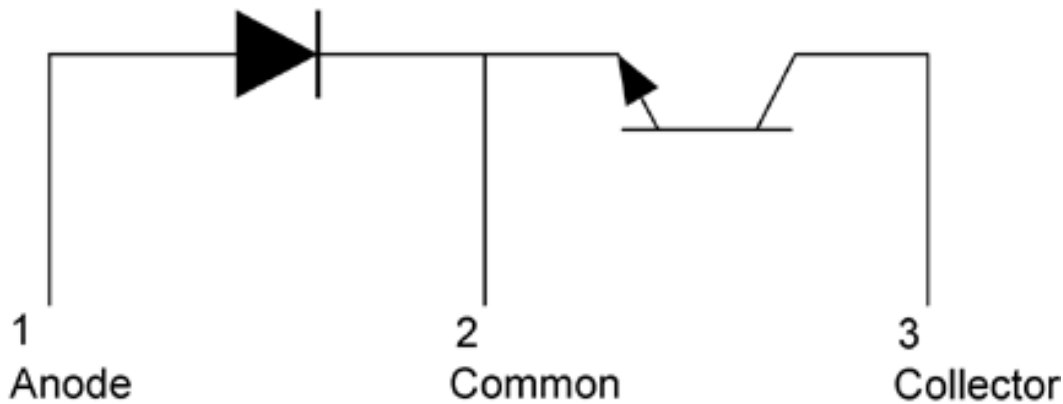

Honeywell

HLC1395-001

HLC1395 Series Infrared Reflective Sensor, Short Distance Detection, Transistor Output, Plastic Package

WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices, or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet (or catalog) is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.