

RE-140RA

MABUCHI MOTOR

OUTPUT : 0.16W ~ 3.0W (APPROX)

金属ブラシ | Metal-brush motors | 金属電刷

代表的用途 玩具・模型




Typical Applications Toys and Models

主要用途 玩具、模型

WEIGHT : 19g (APPROX)

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
			r/min	A	r/min	A	mN-m	g-cm	W	mN-m	g-cm	A
RE-140RA-2270	1.5~3.0	1.5V CONSTANT	8100	0.21	6150	0.66	0.66	6.7	0.42	2.74	28	2.10
RE-140RA-18100	1.5~3.0	1.5V CONSTANT	5700	0.13	4230	0.37	0.48	4.9	0.21	1.86	19	1.07
RE-140RA-12240	3~6	3V CONSTANT	4800	0.050	3530	0.14	0.44	4.5	0.16	1.67	17	0.39


DIRECTION OF ROTATION

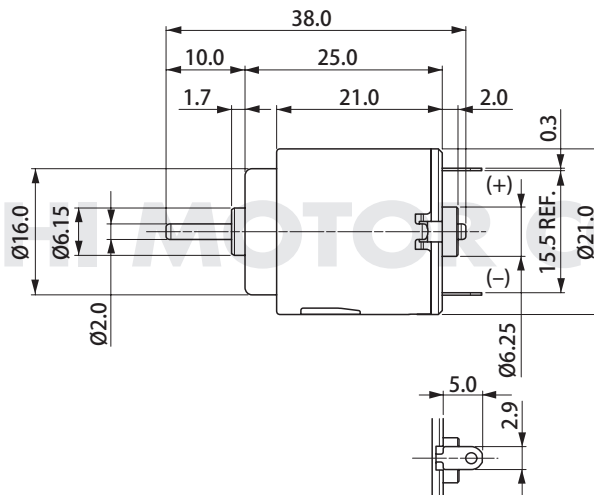

UNIT : MILLIMETERS


RE-140RA-2270

1.5V

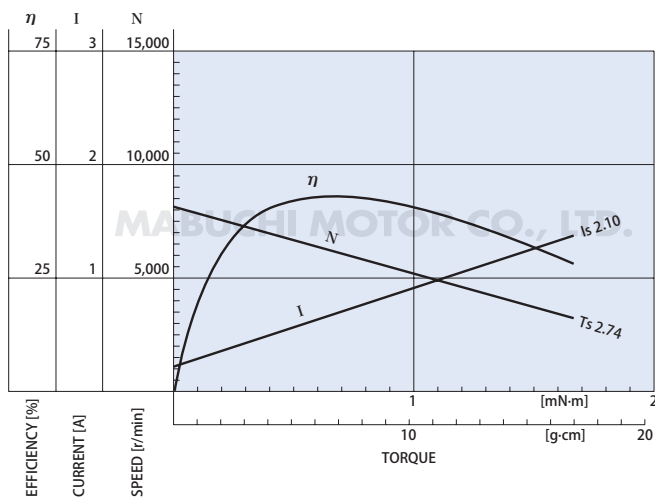

RE-140RA-18100

1.5V

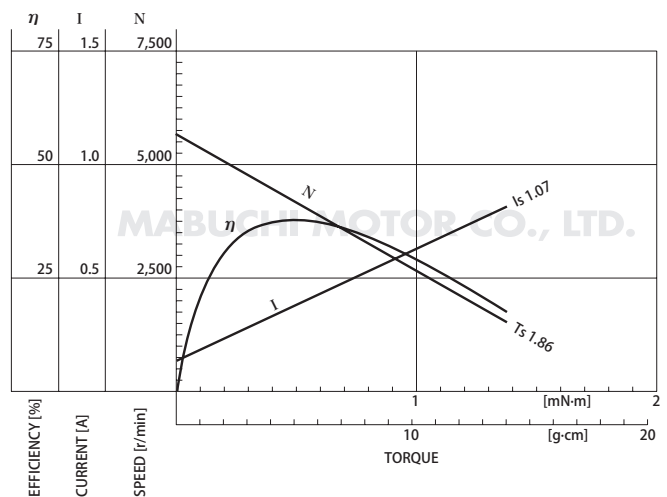

マブチモーター株式会社 (本社 営業部)
MABUCHI MOTOR CO., LTD.
(Headquarters Sales Dept. | 总公司 営業部)

千葉県松戸市松飛台 430 番地 〒270-2280 Tel. 047-710-1868 Fax. 047-710-1132
430 Matsuhidai, Matsudo City, Chiba 270-2280, Japan Tel. 81-47-710-1868 Fax. 81-47-710-1132
E-mail : slsingq@mabuchi-motor.co.jp