

RE-280RA/SA



OUTPUT : 0.8W ~ 4.5W (APPROX)

金属ブラシ | Metal-brush motors | 金属电刷


代表的用途 家電機器：マッサージャー／バイブレーター
玩具・模型

Typical Applications Home Appliances : Massager / Vibrator
Toys and Models

主要用途 家電機器：按摩棒
玩具、模型

WEIGHT : 42g (APPROX)


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
			r/min	A	r/min	A	mN-m	g-cm	W	mN-m	g-cm	A
RE-280RA-2865	1.5~3.0	3V CONSTANT	9200	0.16	7770	0.87	1.98	20.2	1.61	12.7	129	4.70
RE-280SA-2865	1.5~4.5	3V CONSTANT	7100	0.16	6000	0.88	2.58	26.3	1.62	16.7	170	4.80
RE-280SA-2295	3~6	6V CONSTANT	9600	0.14	8150	0.78	3.27	33.3	2.79	21.6	220	4.40

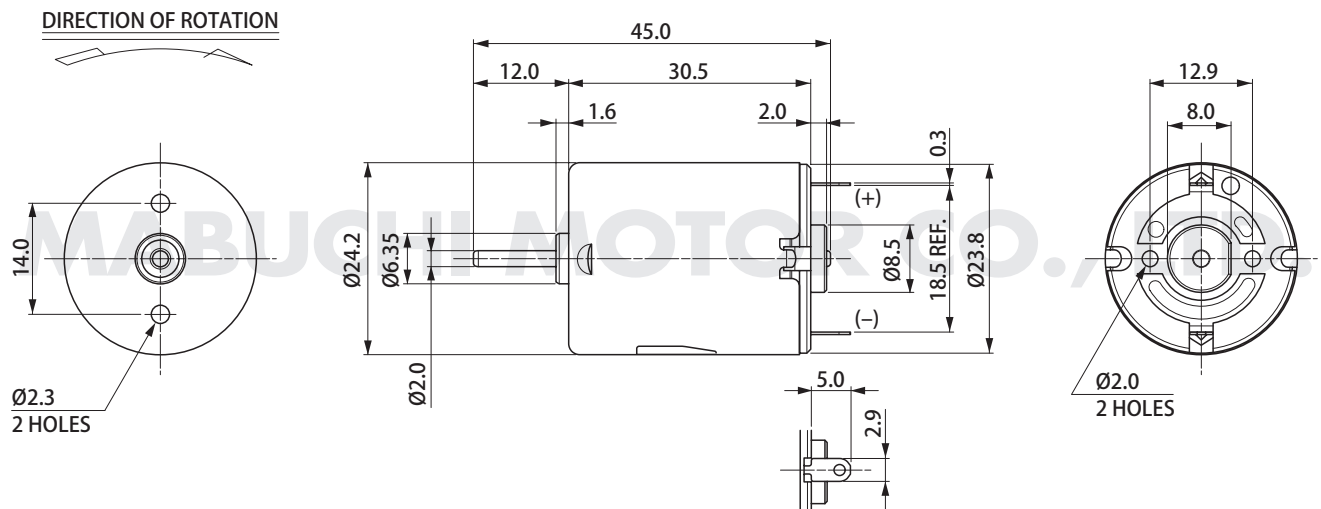

UNIT : MILLIMETERS


RE-280RA-2865

3.0V

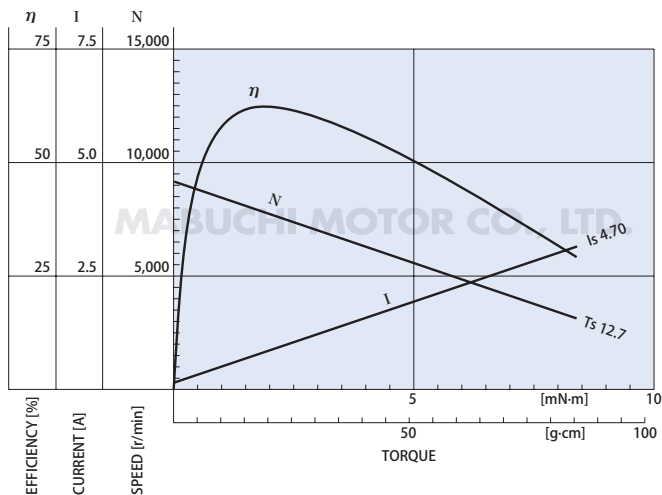

RE-280SA-2865

3.0V

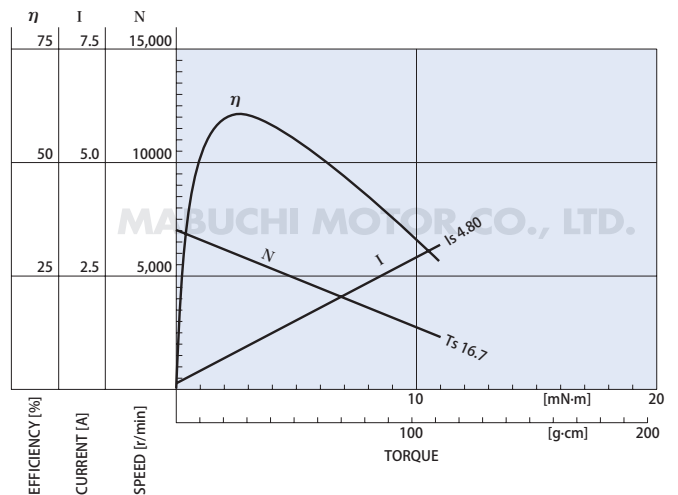

マブチモーター株式会社 (本社 営業部)
MABUCHI MOTOR CO., LTD.
(Headquarters Sales Dept. | 总公司 営業部)

千葉県松戸市松飛台 430 番地 〒270-2280 Tel. 047-710-1868 Fax. 047-710-1132
430 Matsuhidai, Matsudo City, Chiba 270-2280, Japan Tel. 81-47-710-1868 Fax. 81-47-710-1132
E-mail : slsingq@mabuchi-motor.co.jp