

RS-540/545H






输出功率: 约5.0~50W
碳刷马达

典型应用:
真空吸尘器
空气压缩机
电动工具 遥控玩具

OUTPUT: APPROX 5.0~50W
Carbon Brush Motor

Typical Applications:
Vacuum Cleaner
Air Compressor
Power Tools Radio Control Model

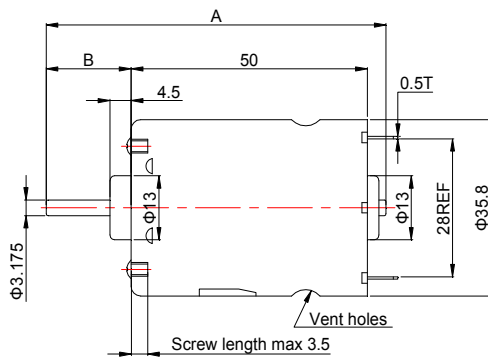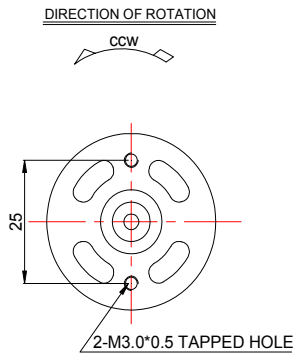



Unit:mm

Customizable Parameters:

1. Length A and B
2. Electrical Performance
3. Direction of Rotation

WEIGHT:167g(APPROX)

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率点 AT MAXIMUM EFFICIENCY					堵转 STALL		
	使用范围 OPERATING RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	转矩 TORQUE	功率 OUTPUT	转矩 TORQUE	电流 CURRENT		
		V	rpm	A	rpm	A	g.cm	mN.m	W	g.cm	mN.m	A
RS-540PH-2962	6.0~15.0	12.0	6450	0.23	5537	1.39	207	20.31	11.76	1460	143.28	8.45
RS-545SH-2190	6.0~26.0	24.0	8500	0.13	7340	0.82	185	18.16	13.93	1355	132.97	5.20
RS-545PH-5025	6.0~20.0	18.0	25000	1.2	21530	7.44	409	40.14	90.32	2948	289.30	46.20

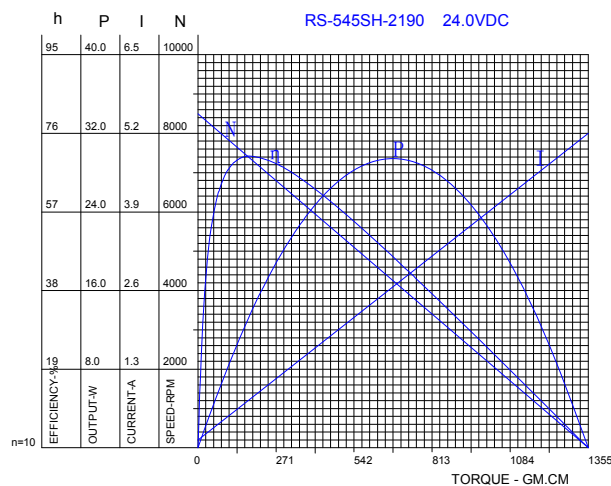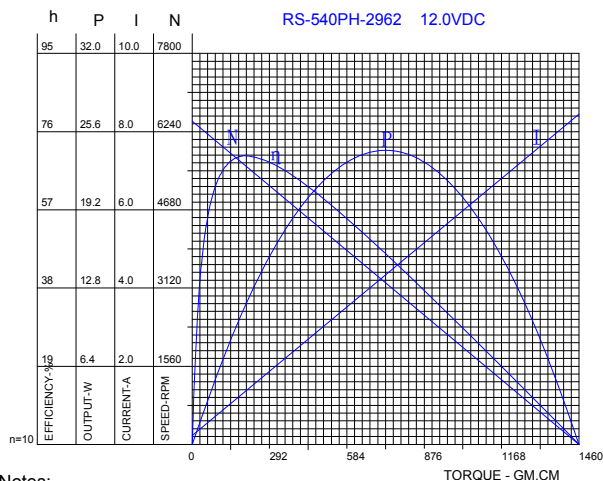

Notes:

The above technical data sheet only for reference, the parameters like voltage, speed, current, torque, etc. are available to be custom made per your request.