

RS-540RH/SH



Carbon-brush motors

OUTPUT : 5.0W~90W (APPROX)


WEIGHT : 160g (APPROX)

Typical Applications Home Appliances : Vacuum Cleaner
 Cordless Power Tools : Drill / Screwdriver / Cordless Garden Tool / Air Compressor
 Toys and Models : Radio Control Model

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE		CURRENT	
			r/min	A	r/min	A	mN-m	g-cm	W	mN-m	g-cm	A
RS-540RH-7516 (*1)	2.4~4.5	3.6V CONSTANT	20200	2.90	16310	12.2	15.1	154	25.8	78.5	800	51.0
RS-540RH-5045	4.5~9.6	6V CONSTANT	11600	0.82	9660	4.09	14.4	147	14.6	86.3	880	20.4
RS-540SH-5045 (*1)	4.5~12.0	12V CONSTANT	17500	0.95	15080	5.93	31.8	324	50.1	230	2345	37.0

(*1) CCW shifted commutation (CCW+)


The terminal position against the tapped holes varies depending on CW+/NEUTRAL.

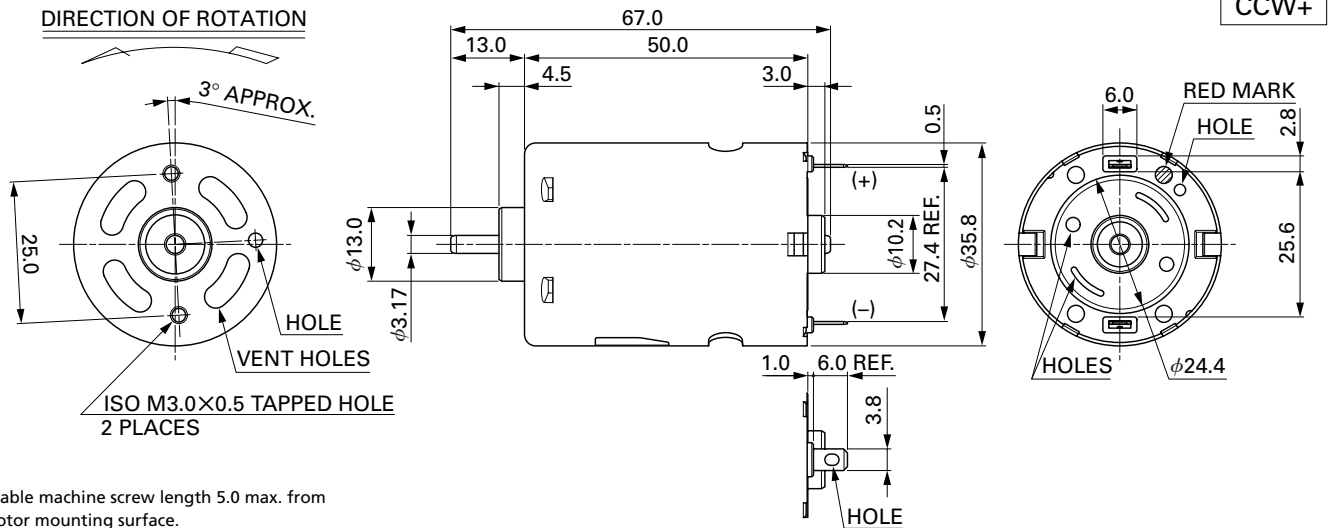

Usable machine screw length 5.0 max. from motor mounting surface.

UNIT: MILLIMETERS

RS-540RH-7516 3.6V

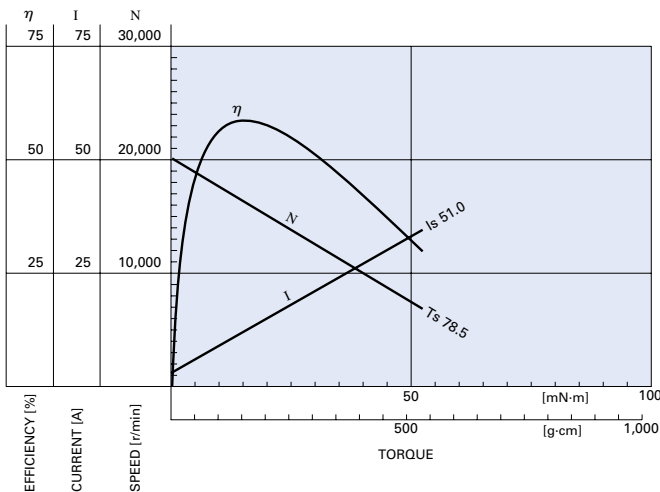

RS-540SH-5045 12.0V

