
## SN74HC74-EP DUAL D-TYPE POSITIVE EDGE TRIGGERED FLIP-FLOP WITH CLEAR AND PRESET

SCLS710-MARCH 2008

#### **FEATURES**

- Controlled Baseline
  - One Assembly Site
  - One Test Site
  - One Fabrication Site
- Extended Temperature Performance of -55°C to 125°C
- Enhanced Diminishing Manufacturing Sources (DMS) Support
- Enhanced Product-Change Notification
- Qualification Pedigree (1)
- (1) Component qualification in accordance with JEDEC and industry standards to ensure reliable operation over an extended temperature range. This includes, but is not limited to, Highly Accelerated Stress Test (HAST) or biased 85/85, temperature cycle, autoclave or unbiased HAST, electromigration, bond intermetallic life, and mold compound life. Such qualification testing should not be viewed as justifying use of this component beyond specified performance and environmental limits.

- Wide Operating Voltage Range of 2 V to 6 V
- Outputs Can Drive up to 10 LSTTL Loads
- Low Power Consumption, 80 μA Max I<sub>CC</sub>
- Typical t<sub>pd</sub> = 15 ns
- ±4 mA Output Drive at 5 V
- Low Input Current of 1 mA Max



### **DESCRIPTION/ORDERING INFORMATION**

The SN74HC74 device contains two independent D-type positive edge triggered flip-flops. A low level at the preset (PRE) or clear (CLR) inputs sets or resets the outputs, regardless of the levels of the other inputs. When PRE and CLR are inactive (high), data at the data (D) input meeting the setup time requirements are transferred to the outputs on the positive going edge of the clock (CLK) pulse. Clock triggering occurs at a voltage level and is not directly related to the rise time of CLK. Following the hold time interval, data at the D input can be changed without affecting the levels at the outputs.

### ORDERING INFORMATION(1)

T <sub>A</sub>	PACKAG	iE <sup>(2)</sup>	ODERABLE PART NUMBER	TOP-SIDE MARKING
–55°C to 125°C	SOIC - D	Reel of 2500	SN74HC74MDREP	HC74MEP
	TSSOP – PW	Reel of 2000	SN74HC74MPWREP	HC74MEP

<sup>(1)</sup> For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.

#### **FUNCTION TABLE**

	INP	UTS		OUTI	PUTS
PRE	CLR	CLK	D	Q	Q
L	Н	Χ	Χ	Н	L
Н	L	Χ	Χ	L	Н
L	L	Χ	Χ	H <sup>(1)</sup>	$H^{(1)}$
Н	Н	<b>↑</b>	Н	Н	L
Н	Н	<b>↑</b>	L	L	Н
Н	Н	L	Χ	$Q_0$	$\overline{Q}_0$

(1) This configuration is nonstable; that is, it does not persist when PRE or CLR returns to its inactive (high) level.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

<sup>(2)</sup> Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.

SCLS710-MARCH 2008



### **LOGIC DIAGRAM (POSITIVE LOGIC)**

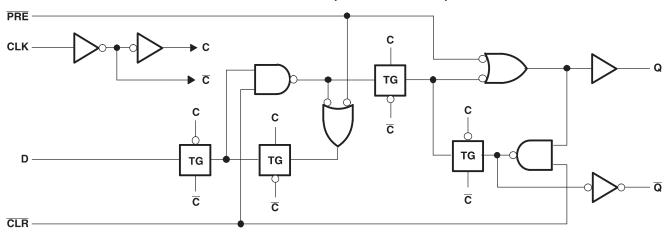

### Absolute Maximum Ratings(1)

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
$V_{CC}$	Supply voltage range		-0.5	7	V
I <sub>IK</sub>	Input clamp current	$V_{I} < 0 \text{ or } V_{I} = 0 \text{ to } V_{CC}^{(1)}$		±20	mA
I <sub>OK</sub>	Output clamp current	$V_O < 0$ or $V_O = 0$ to $V_{CC}^{(1)}$		±20	mA
Io	Continuous output current	$V_O = 0$ to $V_{CC}$		±25	mA
	Continuous current through V <sub>CC</sub> or GND			±50	mA
$\theta_{JA}$	Package thermal impedance <sup>(2)</sup>	PW package		113	°C/W
T <sub>stg</sub>	Storage temperature range		-60	150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

# **RECOMMENDED OPERATING CONDITIONS(1)**

			MIN	NOM	MAX	UNIT
$V_{CC}$	Supply voltage		2	5	6	V
		V <sub>CC</sub> = 2 V	1.5			
$V_{IH}$	High-level input voltage	V <sub>CC</sub> = 4.5 V	3.15			V
		V <sub>CC</sub> = 6 V	4.2			
		V <sub>CC</sub> = 2 V			0.5	
$V_{IL}$	Low-level input voltage	V <sub>CC</sub> = 4.5 V			1.35	V
		V <sub>CC</sub> = 6 V			1.8	
VI	Input voltage		0		$V_{CC}$	V
Vo	Output voltage		0		$V_{CC}$	V
		V <sub>CC</sub> = 2 V			1000	
Δt∖Δν	Input transition rise/fall time	V <sub>CC</sub> = 4.5 V			500	ns
		V <sub>CC</sub> = 6 V			400	
T <sub>A</sub>	Operating free-air temperature	'	-55		125	°C

<sup>(1)</sup> All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

<sup>(2)</sup> The package thermal impedance is calculated in accordance with JESD 51-7.

# SN74HC74-EP DUAL D-TYPE POSITIVE EDGE TRIGGERED FLIP-FLOP WITH CLEAR AND PRESET

SCLS710-MARCH 2008

### **ELECTRICAL CHARACTERISTICS**

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST	TEST CONDITIONS			չ = 25°C		MIN MAX	UNIT
PARAMETER	1231	CONDITIONS	V <sub>cc</sub>	MIN	TYP	MAX	IVIIIN IVIAA	UNIT
			2 V	1.9	1.998		1.9	
		$I_{OH} = -20 \mu A$	4.5 V	4.4	4.499		4.4	
$V_{OH}$	$V_I = V_{IH}$ or $V_{IL}$		6 V	5.9	5.999		5.9	V
		$I_{OH} = -4 \text{ mA}$	4.5 V	3.98	4.3		3.7	
		$I_{OH} = -5.2 \text{ mA}$	6 V	5.48	5.8		5.2	
			2 V		0.002	0.1	0.1	
		$I_{OL} = 20 \mu A$	4.5 V		0.001	0.1	0.1	
$V_{OL}$	$V_I = V_{IH}$ or $V_{IL}$		6 V		0.001	0.1	0.1	V
		$I_{OL} = 4 \text{ mA}$	4.5 V		0.17	0.26	0.4	Į.
		$I_{OL} = 5.2 \text{ mA}$	6 V		0.15	0.26	0.4	Į.
I <sub>I</sub>	$V_I = V_{CC}$ or 0	<u> </u>	6 V		±0.1	±100	±1000	nA
I <sub>cc</sub>	$V_I = V_{CC}$ or 0,	I <sub>O</sub> = 0	6 V			4	80	μΑ
C <sub>i</sub>			2 V to 6 V		3	10	10	pF

### **TIMING REQUIREMENTS**

			.,	T <sub>A</sub> = 2	5°C	RAINI	MAY	LINUT
			V <sub>CC</sub>	MIN	MAX	MIN	MAX	UNIT
			2 V		6		4.2	
$f_{clock}$	Clock frequency		4.5 V		31		21	MHz
			6 V	0	36	0	25	
			2 V	100		150		
		PRE or CLR low	4.5 V	20		30		
	Pulse duration		6 V	17		25		
t <sub>w</sub>	tw i disc duration		2 V	80		120		ns
		CLK high or low	4.5 V	16		24		
			6 V	14		20		
			2 V	100		150		
		Data	4.5 V	20		30		
	Catua tima hafara CLKA		6 V	17		25		
t <sub>su</sub>	Setup time before CLK↑		2 V	25		40		ns
		PRE or CLR inactive	4.5 V	5		8		
			6 V	4		7		
			2 V	0		0		
t <sub>h</sub>	$t_h$ Hold time, data after CLK $\uparrow$		4.5 V	0		0		ns
			6 V	0		0		

# SN74HC74-EP DUAL D-TYPE POSITIVE EDGE TRIGGERED FLIP-FLOP WITH CLEAR AND PRESET





### **SWITCHING CHARACTERISTICS**

over operating free-air temperature range  $C_L = 50 \text{ pF}$ , (unless otherwise noted)

PARAMETER	FROM	то	V	T,	<sub>A</sub> = 25°C		MIN	MAX	UNIT
PARAMETER	(INPUT)	(OUTPUT)	V <sub>cc</sub>	MIN	TYP	MAX	IVIIIN	WAX	UNII
			2 V	6	10		4.2		
$f_{max}$			4.5 V	31	50		21		MHz
			6 V	36	60		25		
			2 V		70	230		345	
	PRE or CLR	Q or Q	4.5 V		20	46		69	no
			6 V		15	39		59	
t <sub>pd</sub>			2 V		70	175		250	ns
	CLK	Q or $\overline{Q}$	4.5 V		20	35		50	
			6 V		15	30		42	
t <sub>t</sub>			2 V		28	75		110	·
		Q or $\overline{Q}$	4.5 V		8	15		22	ns
			6 V		6	13		19	

# **Operating Characteristics**


 $T_A = 25^{\circ}C$ 

	PARAMETER	TEST CONDITIONS	TYP	UNIT
$C_{pd}$	Power dissipation capacitance	No load	35	pF

Submit Documentation Feedback

SCLS710-MARCH 2008

#### PARAMETER MEASURMENT INFORMATION

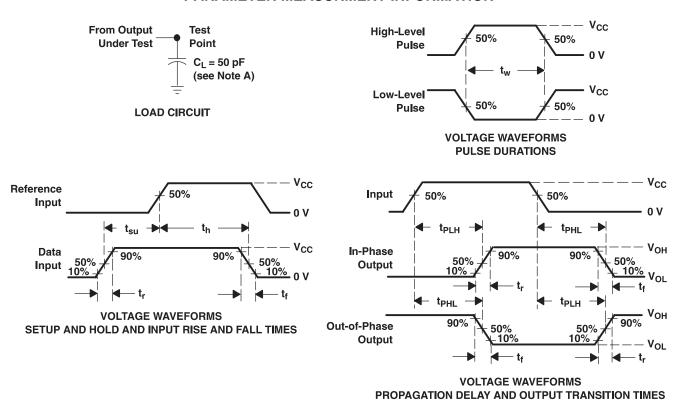

NOTES: A. C<sub>L</sub> includes probe and test-fixture capacitance.

- B. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_r = 6$  ns.
- C. For clock inputs,  $f_{max}$  is measured when the input duty cycle is 50%.
- D. The outputs are measured one at a time, with one input transition per measurement.
- E.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .

Figure 1. Load Circuit and Voltage Waveforms



### PACKAGE OPTION ADDENDUM

31-May-2014

#### **PACKAGING INFORMATION**

Orderable Device	Status	Package Type	_	Pins	_	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
SN74HC74MPWREP	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-55 to 125	HC74MEP	Samples
V62/08613-01XE	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-55 to 125	HC74MEP	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead/Ball Finish Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



### **PACKAGE OPTION ADDENDUM**

31-May-2014

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN74HC74-EP:

Catalog: SN74HC74

Automotive: SN74HC74-Q1

• Military: SN54HC74

#### NOTE: Qualified Version Definitions:

• Catalog - TI's standard catalog product


- Automotive Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Military QML certified for Military and Defense Applications

# PACKAGE MATERIALS INFORMATION


www.ti.com 14-Jul-2012

### TAPE AND REEL INFORMATION

### **REEL DIMENSIONS**

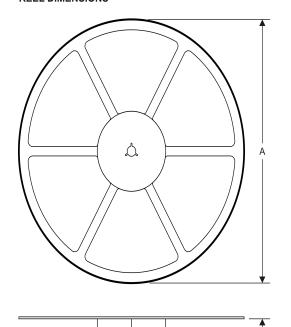

### **TAPE DIMENSIONS**

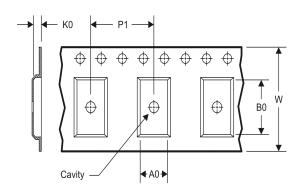

A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### TAPE AND REEL INFORMATION

### \*All dimensions are nominal

Device	Package Type	Package Drawing			Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74HC74MPWREP	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

www.ti.com 14-Jul-2012



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74HC74MPWREP	TSSOP	PW	14	2000	367.0	367.0	35.0

PW (R-PDSO-G14)

### PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M—1994.
- B. This drawing is subject to change without notice.
  - Sody length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
- E. Falls within JEDEC MO-153



# PW (R-PDSO-G14)

# PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have *not* been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

#### Products Applications

Audio www.ti.com/audio Automotive and Transportation www.ti.com/automotive **Amplifiers** amplifier.ti.com Communications and Telecom www.ti.com/communications **Data Converters** dataconverter.ti.com Computers and Peripherals www.ti.com/computers **DLP® Products** www.dlp.com Consumer Electronics www.ti.com/consumer-apps DSP dsp.ti.com **Energy and Lighting** www.ti.com/energy Clocks and Timers www.ti.com/clocks Industrial www.ti.com/industrial Interface interface.ti.com Medical www.ti.com/medical Logic Security www.ti.com/security logic.ti.com

Power Mgmt power.ti.com Space, Avionics and Defense www.ti.com/space-avionics-defense

Microcontrollers microcontroller.ti.com Video and Imaging www.ti.com/video

RFID www.ti-rfid.com

OMAP Applications Processors www.ti.com/omap TI E2E Community e2e.ti.com

Wireless Connectivity www.ti.com/wirelessconnectivity