

CC3000C-AZ Series

3 Phase & 3 lines 500VAC

Inquir

5 up to 150A/for out-put



Application

Inverter/for Out-put

Specifications

| Part No. | Rated Current | Weight | Dimensions [mm] | | | | | | | | | | | | N | P | |
|---------------|---------------|--------|-----------------|-----|-----|-----|-----|-----|----|-----|-----|----|---------|----------|------|---|--|
| | | | A | B | C | D | E | F | G | H | J | L | | | | | |
| CC3005C-AZ | 5A | 1Kg | 155 | 140 | 125 | 110 | 95 | 70 | 32 | 50 | 20 | M4 | dia.4.5 | R2.54 L6 | fig1 | | |
| CC3010C-AZ | 10A | 1Kg | 155 | 140 | 125 | 110 | 95 | 70 | 32 | 50 | 20 | M4 | | | | | |
| CC3015C-AZ | 15A | 1Kg | 155 | 140 | 125 | 110 | 95 | 70 | 32 | 50 | 20 | M4 | | | | | |
| CC3020C-AZ | 20A | 1.5Kg | 175 | 160 | 145 | 130 | 110 | 80 | 32 | 70 | 25 | M4 | dia.5.5 | R2.75 L7 | | | |
| CC3030C-AZ | 30A | 1.5Kg | 175 | 160 | 145 | 130 | 110 | 80 | 32 | 70 | 25 | M4 | | | | | |
| CC3040C-AZ | 40A | 2.5Kg | 170 | 120 | 80 | 150 | 135 | 120 | 44 | 120 | 90 | M5 | dia.5.5 | | | | |
| CC3050C-AZ | 50A | 5Kg | 230 | 180 | 100 | 220 | 200 | 180 | 44 | 170 | 140 | M6 | | | | | |
| CC3060C-AZ | 60A | 6Kg | 230 | 180 | 100 | 220 | 200 | 180 | 44 | 170 | 140 | M6 | dia.6.5 | | fig2 | | |
| CC3080C-AZ | 80A | 7.5Kg | 267 | 210 | 150 | 250 | 230 | 210 | 57 | 170 | 140 | M6 | | | | | |
| CC3100C-AZ | 100A | 8.5Kg | 267 | 210 | 150 | 250 | 230 | 210 | 57 | 170 | 140 | M8 | | | | | |
| CC3115C-AZ | 115A | 9Kg | 267 | 210 | 150 | 250 | 230 | 210 | 57 | 170 | 140 | M8 | | | | | |
| CC3150C-AZ | 150A | 10Kg | 267 | 220 | 160 | 260 | 240 | 220 | 57 | 170 | 140 | M8 | | | | | |
| Rated Voltage | 500VAC | | | | | | | | | | | | | | | | |

fig1 (5-30A)



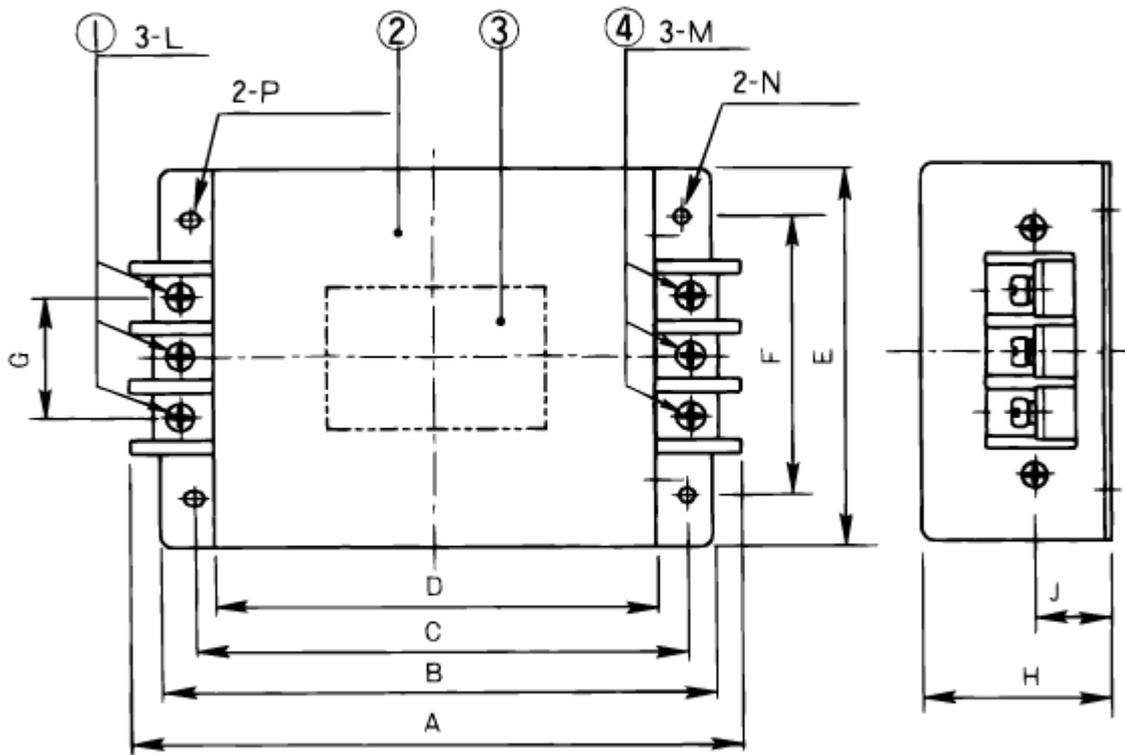


fig2 (40-150A)

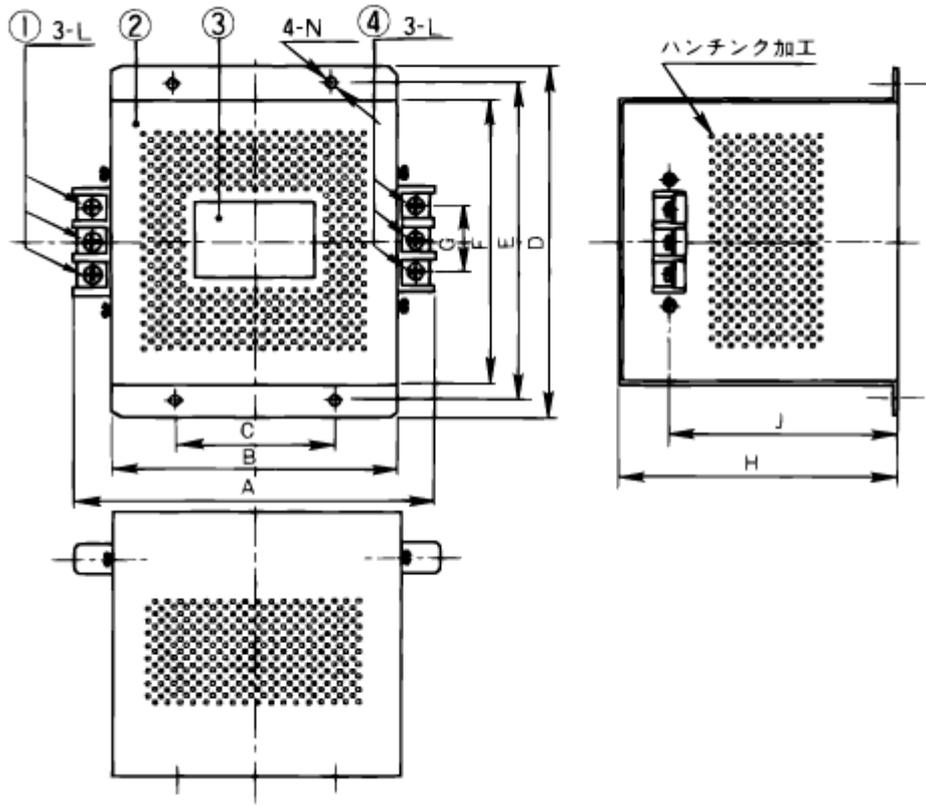

Frequency Data

10A品

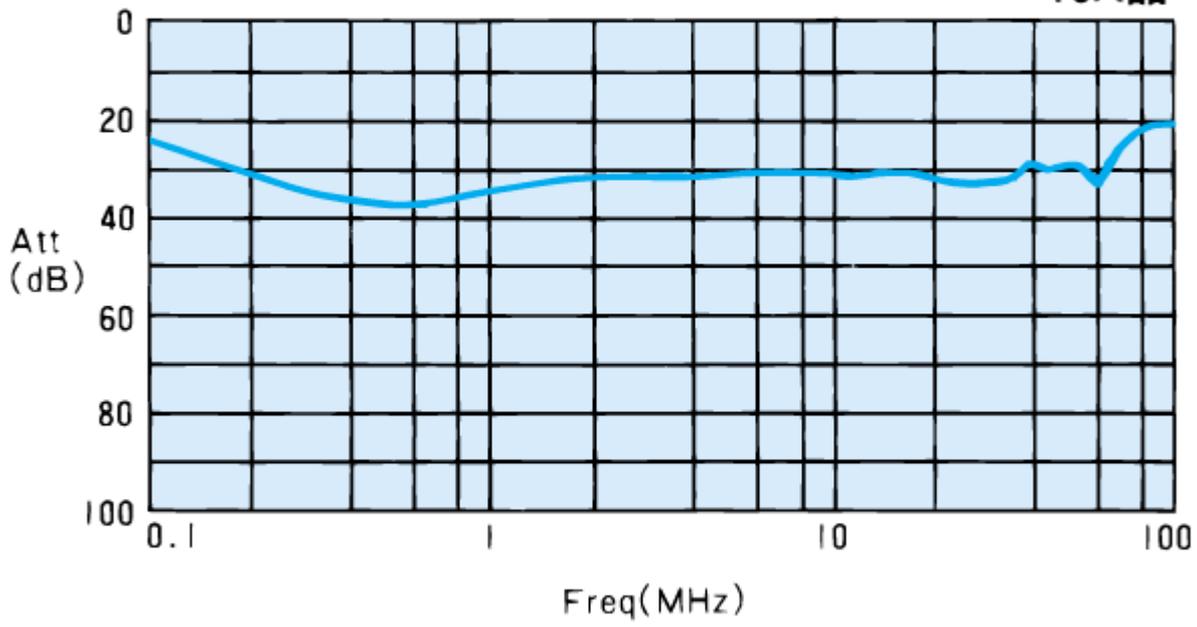

Circuit Diagram

