

BC846 SERIES  
BC847 SERIES  
BC848 SERIES

SURFACE MOUNT SILICON  
NPN TRANSISTORS



SOT-23 CASE



www.centrasemi.com

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR BC846, BC847 and BC848 series devices are silicon NPN transistors manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for general purpose switching and amplifier applications.

**MARKING CODE: SEE MARKING CODE TABLE ON FOLLOWING PAGE**

Note: Reverse Lead Codes Available, Add "R" to the end of the Part # and Marking Code.

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )

Collector-Base Voltage  
Collector-Emitter Voltage  
Emitter-Base Voltage  
Continuous Collector Current  
Peak Collector Current  
Peak Base Current  
Power Dissipation  
Operating and Storage Junction Temperature  
Thermal Resistance

SYMBOL	BC848	BC847	BC846	UNITS
$V_{CBO}$	30	50	80	V
$V_{CEO}$	30	45	65	V
$V_{EBO}$	5.0	6.0	6.0	V
$I_C$		100		mA
$I_{CM}$		200		mA
$I_{BM}$		200		mA
$P_D$		330		mW
$T_J, T_{stg}$		-55 to +150		$^\circ\text{C}$
$\theta_{JA}$		375		$^\circ\text{C/W}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
$I_{CBO}$	$V_{CB}=30\text{V}$			15	nA
$I_{CBO}$	$V_{CB}=30\text{V}, T_A=150^\circ\text{C}$			5.0	$\mu\text{A}$
$I_{EBO}$	$V_{EB}=5.0\text{V}$			100	nA
$BV_{CBO}$	$I_C=10\mu\text{A}$ (BC848)	30			V
$BV_{CBO}$	$I_C=10\mu\text{A}$ (BC847)	50			V
$BV_{CBO}$	$I_C=10\mu\text{A}$ (BC846)	80			V
$BV_{CEO}$	$I_C=10\text{mA}$ (BC848)	30			V
$BV_{CEO}$	$I_C=10\text{mA}$ (BC847)	45			V
$BV_{CEO}$	$I_C=10\text{mA}$ (BC846)	65			V
$BV_{EBO}$	$I_E=10\mu\text{A}$ (BC846, BC847)	6.0			V
$BV_{EBO}$	$I_E=10\mu\text{A}$ (BC848)	5.0			V
$V_{CE(SAT)}$	$I_C=10\text{mA}, I_B=0.5\text{mA}$			0.25	V
$V_{CE(SAT)}$	$I_C=100\text{mA}, I_B=5.0\text{mA}$			0.60	V
$V_{BE(SAT)}$	$I_C=10\text{mA}, I_B=0.5\text{mA}$		0.70		V
$V_{BE(SAT)}$	$I_C=100\text{mA}, I_B=5.0\text{mA}$		0.90		V
$V_{BE(ON)}$	$I_C=2.0\text{mA}, V_{CE}=5.0\text{V}$	0.58		0.70	V
$V_{BE(ON)}$	$I_C=10\text{mA}, V_{CE}=5.0\text{V}$			0.77	V
$C_{cb}$	$V_{CB}=10\text{V}, I_E=0, f=1.0\text{MHz}$			4.5	pF

	TEST CONDITIONS	BC846A		BC846B		BC847C	
		MIN	MAX	MIN	MAX	MIN	MAX
$h_{FE}$	$V_{CE}=5.0\text{V}, I_C=2.0\text{mA}$	110	220	200	450	420	800


R2 (24-November 2020)

BC846 SERIES  
BC847 SERIES  
BC848 SERIES



**SURFACE MOUNT SILICON  
NPN TRANSISTORS**

**SOT-23 CASE - MECHANICAL OUTLINE**

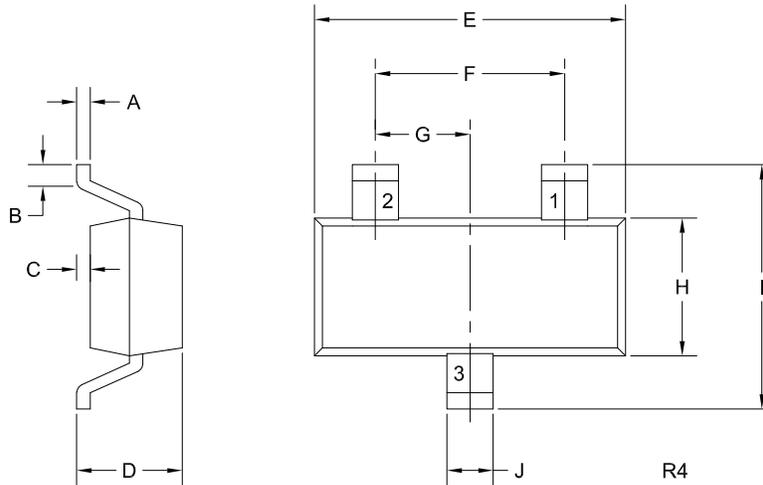

**LEAD CODE:**

STANDARD	*REVERSE
1) Base	1) Emitter
2) Emitter	2) Base
3) Collector	3) Collector

DEVICE	MARKING CODE
BC846A	1A
BC846B	1B
BC847A	1E
BC847B	1F
BC847C	1G
BC848A	1J
BC848B	1K
BC848C	1L

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.003	0.007	0.08	0.18
B	0.006	-	0.15	-
C	-	0.005	-	0.13
D	0.035	0.044	0.89	1.12
E	0.110	0.120	2.80	3.05
F	0.075		1.90	
G	0.037		0.95	
H	0.047	0.055	1.19	1.40
I	0.083	0.104	2.10	2.64
J	0.014	0.020	0.35	0.50

SOT-23 (REV: R4)

\* Reverse Lead Codes Available, Add "R" to the end of the Part # and Marking Code.

R2 (24-November 2020)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)



https://www.centalsemi.com

# Product End of Life Notification

PDN ID:	PDN01269
Notification Date:	2/04/25
Last Buy Date:	8/04/25
Last Shipment Date	2/04/26

Summary: The following Small Signal transistors are discontinued and now classified as End of Life (EOL).

Although Central Semiconductor makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Portfolio Management. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

**\* All Plating types (PBFREE,TIN/LEAD) for each item listed are included in this notice.**

Central Part Number	Suggested Replacement
BCV72 BK	N/A
BCV72 TR	N/A
BCY58-VII	N/A
BCY59	N/A
BCY59-VII	N/A
BC107A	N/A
BC848A TR	N/A
CMPT930 BK	N/A
CMPT930 TR	N/A
MPS3393	N/A
MPS3707	N/A
MPS3710	N/A
MPS6520	N/A
MPS6520 APM	N/A
MPS6520 TRE	N/A
PE4001	N/A
PE4001-18	N/A
PN3565	N/A
PN3565 APM	N/A
PN3565 TRE	N/A
PN3565-18	N/A
PN930	N/A
2N2923	N/A
2N2923 APM	N/A
2N2923 TRE	N/A
2N2924	N/A
2N2924 APM	N/A
2N2924 TRE	N/A
2N2926	N/A
2N2926 APM	N/A
2N2926 TRE	N/A
2N3392	N/A
2N3392 APM	N/A
2N3392 TRE	N/A
2N3393	N/A
2N3393 APM	N/A

\*\*\* CONTINUED \*\*\*

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.



<https://www.centalsemi.com>

# Product End of Life Notification

PDN ID:	PDN01269
Notification Date:	2/04/25
Last Buy Date:	8/04/25
Last Shipment Date	2/04/26

\*\*\* CONTINUED FROM PRIOR PAGE \*\*\*

\* All Plating types (PBFREE,TIN/LEAD) for each item listed are included in this notice.

Central Part Number	Suggested Replacement
2N3393 TRE	N/A
2N3397	N/A
2N3414	N/A
2N3416	N/A
2N3416 APM	N/A
2N3416 APP	N/A
2N3416 TRA	N/A
2N3416 TRE	N/A
2N3709	N/A
2N5172	N/A
2N5172 APM	N/A
2N5172 TRE	N/A
2N5209	N/A
2N5209 APM	N/A
2N5209 TRE	N/A
2N5961	N/A
2N5961 APM	N/A
2N5961 TRE	N/A
2N930	N/A
2N930A	N/A
2N930B	N/A
2SC1815	N/A
2SC1815 APM	N/A
2SC1815 TRE	N/A
2SC1815-BL	N/A
2SC1815-GR	N/A
2SC1815-O	N/A
2SC1815-Y	N/A
2SC1815-Y APM	N/A

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. If you would like assistance, please visit <https://my.centalsemi.com/submit-inquiry?type=ER> to submit an online inquiry.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.