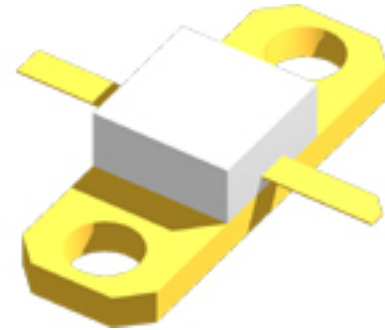


SILICON MICROWAVE POWER TRANSISTOR**PRODUCT DATA SHEET****FEATURES:**

- Common Base, Class C Package Configuration
- High Output Power
20 W @ 1.7 to 2.0 GHz
- High Gain Bandwidth Product
 $f_t = 6.0 \text{ GHz @ } I_C = 3200 \text{ mA}$
- High Gain
 $G_{PE} = 7.0 \text{ dB to } 8.2 \text{ dB}$
- High Reliability
Gold Metallization
Nitride Passivation
- Diffused Ballast Resistors
- BeO Package
- Built-In Matching Network
for Broadband Operation

PERFORMANCE DATA:

- Electrical Characteristics ($T_A = 25^\circ\text{C}$)


**Absolute Maximum Ratings:**

SYMBOL	PARAMETERS	RATING	UNITS
V_{CBO}	Collector-Base Voltage	50	V
V_{CEO}	Collector-Emitter Voltage	28	V
V_{EBO}	Emitter-Base Voltage	3.5	V
I_C	Collector Current (instantaneous)	3200	mA
T_J	Junction Temperature	200	$^\circ\text{C}$
T_{STG}	Storage Temperature	-65 to 200	$^\circ\text{C}$
θ_{JC}	Thermal Resistance	6.5	C/W

SYMBOL	PARAMETERS & CONDITIONS $V_{CE} = 28\text{V}, I_C = 3200 \text{ mA}, \text{Class C}$	UNIT	MIN.	TYP.	MAX.
P_{1dB}	Power output at 1 dB compression: $f = 1.7 \text{ GHz}$	W		20	
η	Collector Efficiency Class C	%		50	
h_{FE}	Forward Current Transfer Ratio: $V_{CB} = 5\text{V}, I_C = 100 \text{ mA}$		10	60	100
C_{OB}	Output Capacitance: $f = 1 \text{ MHz}, I_E = 0$	pF		4.5	
P_T	Total Power Dissipation	W		40	

BIPOLARICS, INC. Part Number BMT1720B20


SILICON MICROWAVE POWER TRANSISTOR

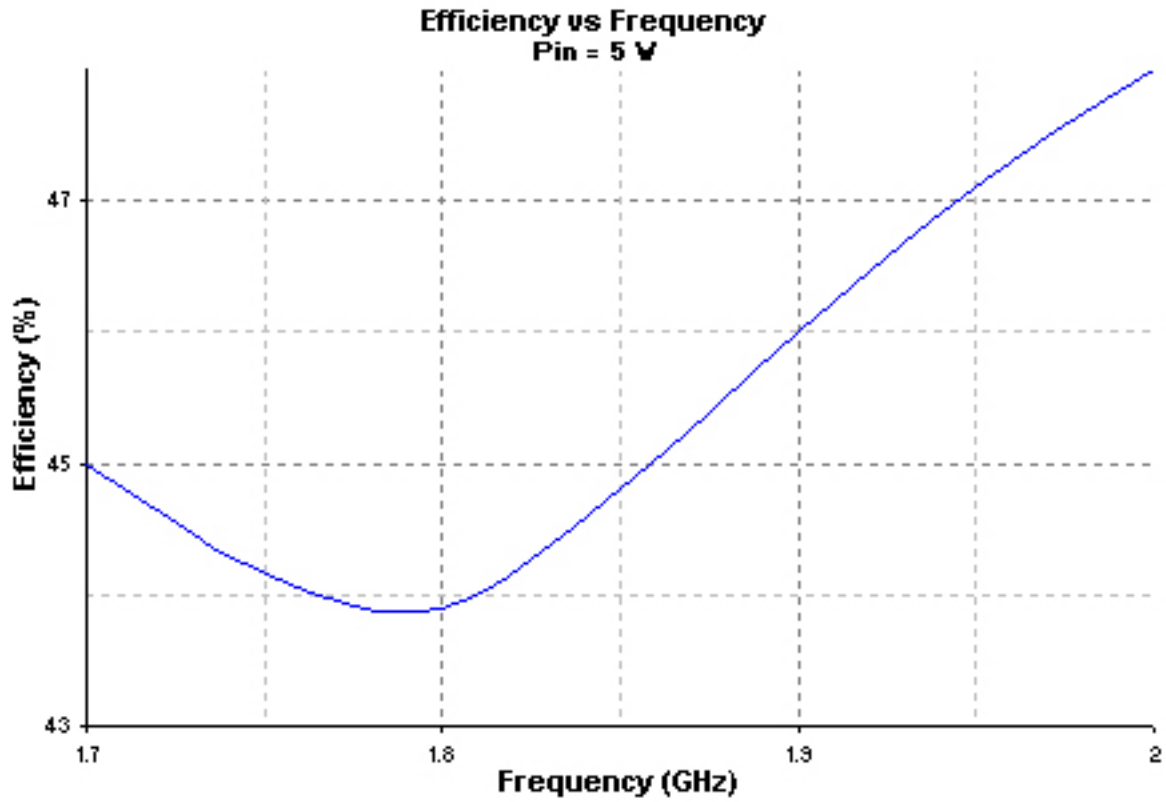


BIPOLARICS, INC. Part Number BMT1720B20

SILICON MICROWAVE POWER TRANSISTOR

Test Board Layout

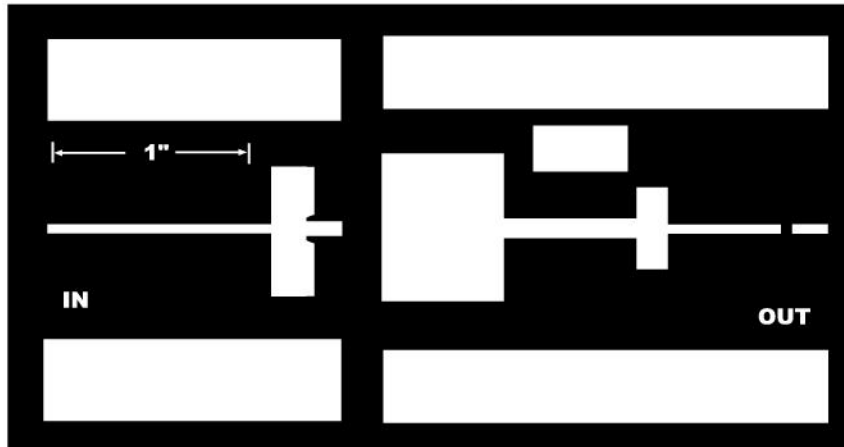

Test Board Components

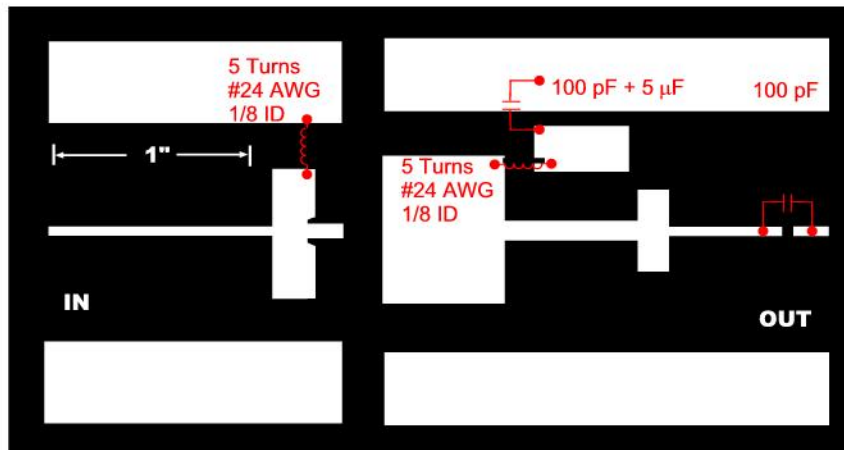


Substrate: 0.030" thick teflon fiberglass $\epsilon_R = 2.55$

BIPOLARICS, INC. Part Number BMT1720B20

SILICON MICROWAVE POWER TRANSISTOR

BIPOLARICS, INC. Part Number BMT1720B20

SILICON MICROWAVE POWER TRANSISTOR

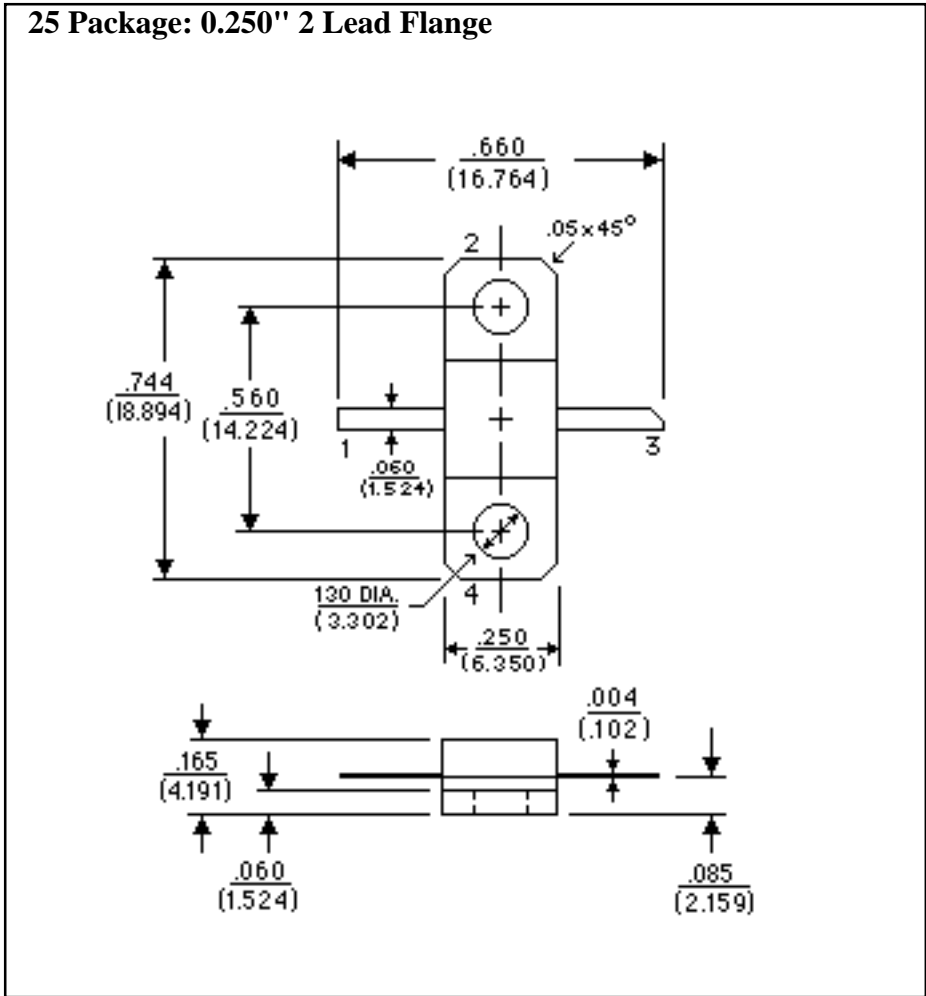

NOTES: (unless otherwise specified)

1. Dimensions are $\frac{\text{in}}{\text{mm}}$
2. Tolerances:
 in .xxx = $\pm .005$
 mm .xx = $\pm .13$
3. All dimensions nominal; subject to change without notice

LEAD	1	2	3	4
25 Package	Emitter	Base	Collector	Base

BIPOLARICS, INC.
 602 Charcot Ave.
 San Jose, CA 94538
 Phone: (408) 456-0430 FAX: (408) 456-0431