


10/100 BASE-T SINGLE PORT TRANSFORMER MODULES

With 1:1 Transmit Turns Ratios

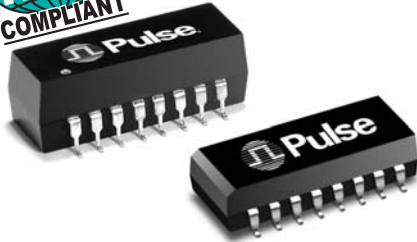

- RoHS-5 peak reflow temperature rating: 235°C
- RoHS-6 peak reflow temperature rating: 245°C
- Compatible with Broadcom, Intel, Micrel, National Semiconductor, ICS, and TDK Transceivers
- Meets IEEE 802.3 specification


Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

RoHS ⁵ Compliant Part Number	RoHS ⁶ Compliant Part Number	Insertion Loss (dB MAX)	Return Loss (dB MIN @ 100 Ω)					Differential to Common Mode Rejection (dB MIN)			Crosstalk (dB TYP)			Hipot (Vrms MIN)
			0.1-100MHz	1-30MHz	40MHz	50MHz	60-80MHz	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz	
H1012	H1012NL ^{4c}	-1.0		-20	-20	-18	-14	-42	-36	-33	-50	-40	-40	1500
H1019	H1019NL ^{4c}	-1.0		-20	-18	-18	-14	-45	-40	-35	-45	-40	-35	1500
—	H1042NL ^{4c}	-1.0		-16	-13.5	-11.5	-10	-45	-40	-35	-40	-38	-35	1500
H1086 ¹	H1086NL ^{4c}	-1.0		-22	-20	-18	-12	-45	-40	-35	-50	-40	-40	1500
H1089	H1089NL ^{4c}	-1.0		-22	-20	-18	-12	-42	-38	-32	-50	-40	-40	1500
H1117	H1117NL ^{4c}	-1.0		-22	-20	-18	-12	-45	-40	-35	-50	-40	-40	1500
H1138	H1138NL ^{4a}	-0.8		-18	-16	-14	-12	42	-37	-33	-50	-40	-40	1500
HX1148 ²	HX1148NL ^{2, 4c}	-1.5		-18	-13.5	-11.5	-10	-42	-37	-33	-50	-40	-40	1500
HX1178 ²	HX1178NL ^{2, 4c}	-1.5		-18	-13.5	-11.5	-10	-42	-37	-33	-50	-40	-40	1500
PE-68515L	PE-68515LNL ^{4d}	-1.0		-18	-18	-16	-12	-50	-45	-40	-55	-50	-50	1500
PE-68517L	PE-68517LNL ^{4d}	-1.0		-18	-16	-15	-12	-45	-40	-35	-50	-40	-40	1500
H1338	H1338NL ^{4a}	-1.1		-18	-16	-14	-12	-42	-37	-35	-40	-40	-35	1800

- Rise time optimized for National's DP83843.
- Operating temperature: -40°+ 85°C.
- When ordering Tape & Reel packaging, add a "T" suffix to the end of the part number, e.g. H1012T
- MSL = Moisture Sensitivity Level: a = 1, b = 2, c = 3, d = 4.
- RoHS-5: Product does not contain 5 out of the 6 banned substances specified in the RoHS directive (product contains lead in applications considered solder).
- RoHS-6: Product does not contain 5 out of the 6 banned substances specified in the RoHS directive. Some internal connections may contain lead in high-temperature solder (solder alloys containing more than 85% lead).

Mechanicals

PE-68515L, PE-68517L, H1042NL

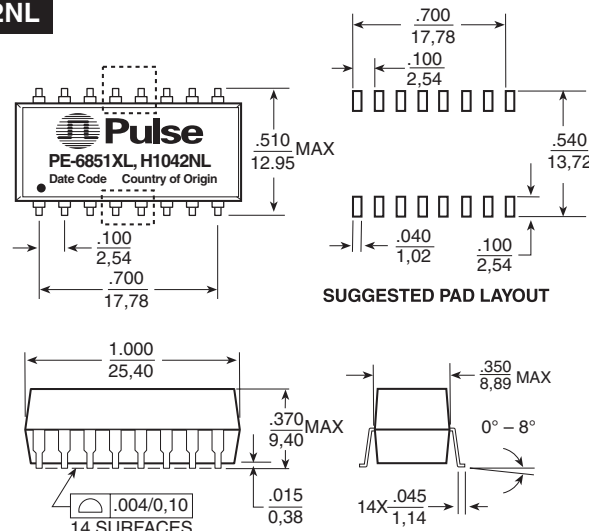

Weight 3.5 grams
 Tube 20/tube
 Tape & Reel 160/reel

NOTE: The PE-68515L pins 4 and 13 are removed.
 The PE-68517L pins 5 and 12 are removed.

Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$

USA 858 674 8100 • Germany 49 7032 7806 0 • Singapore 65 6287 8998 • Shanghai 86 21 32181071 • China 86 755 33966678 • Taiwan 886 3 4641811

www.pulseeng.com

10/100 BASE-T SINGLE PORT TRANSFORMER MODULES


With 1:1 Transmit Turns Ratios



Mechanicals (continued)

H1012, H1019, H1086, H1089, H1117,


H1138, HX1148, HX1178

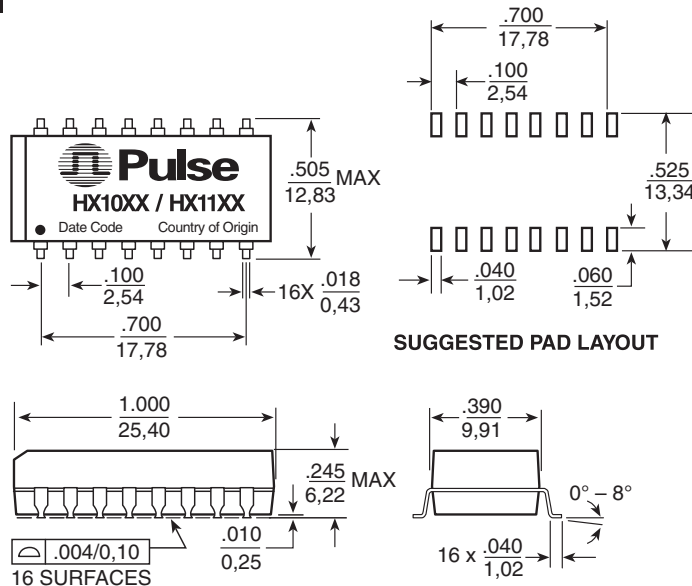

Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

Weight3.0 grams
Tube20/tube
Tape & Reel300/reel

H1338

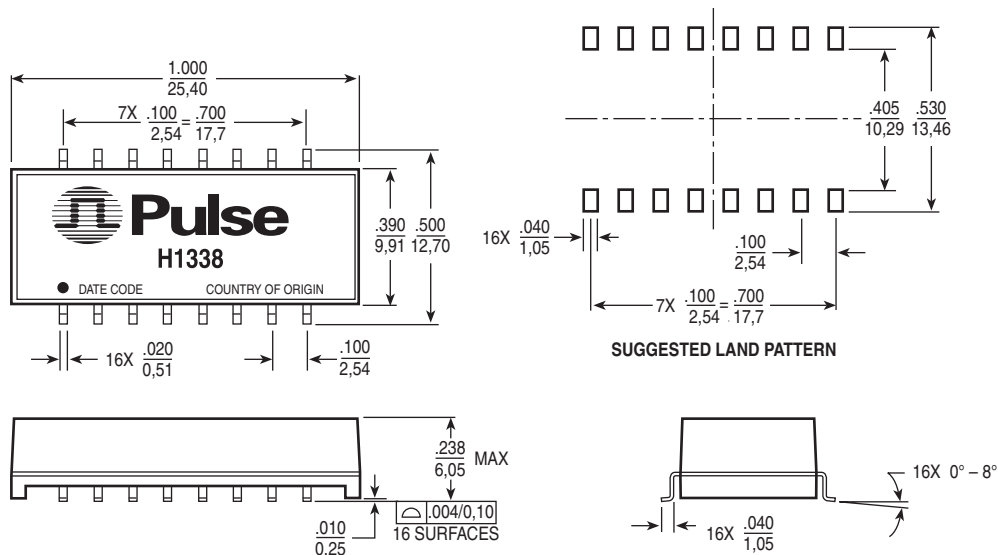

Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

Weight3.0 grams
Tube20/tube
Tape & Reel300/reel


10/100 BASE-T SINGLE PORT TRANSFORMER MODULES

With 1:1 Transmit Turns Ratios




Schematics


PE-68515L, H1012, H1086, H1089, HX1148, H1138

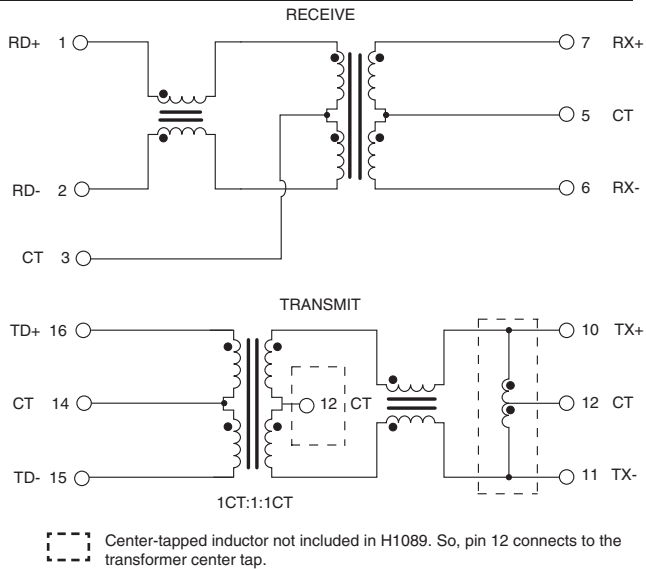


PE-68517L, H1019

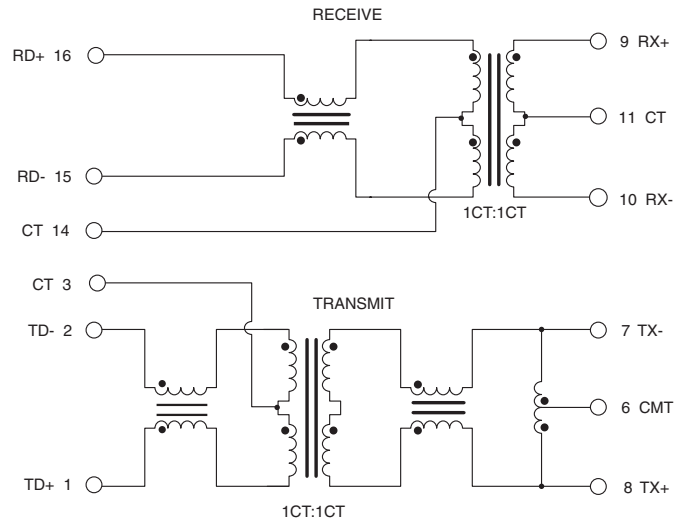


H1117, HX1178

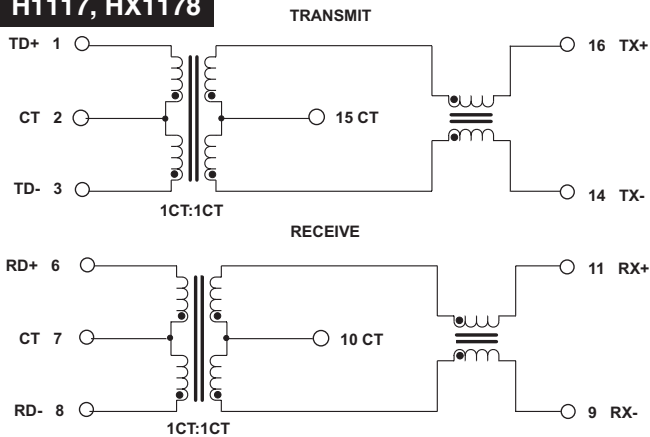

H1042NL

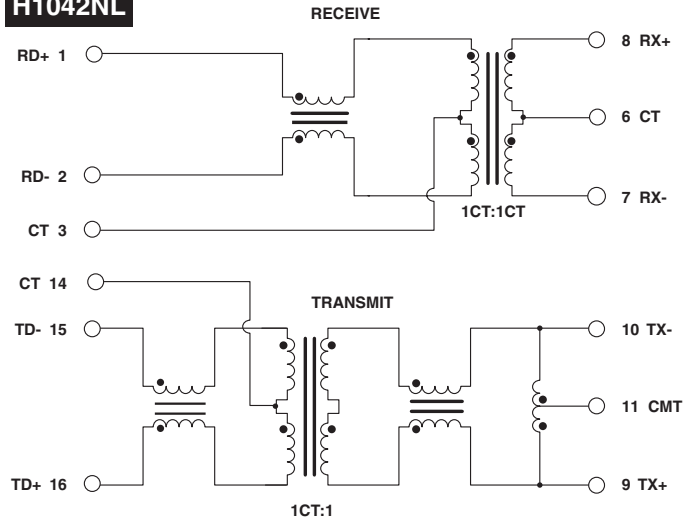

H1338

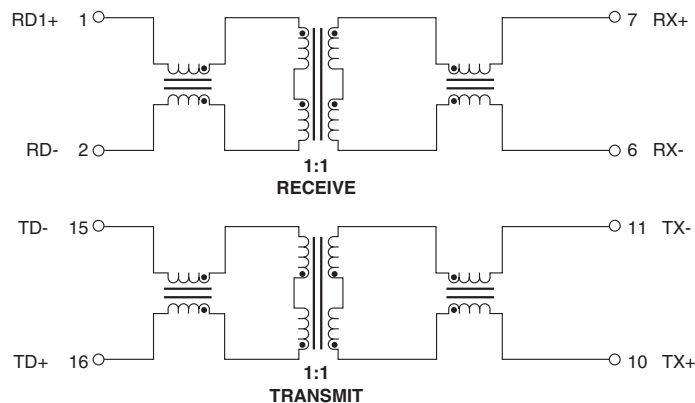


10/100 BASE-T SINGLE PORT TRANSFORMER MODULES

With 1:1 Transmit Turns Ratios




Typical Application Circuits

H1012, H1138

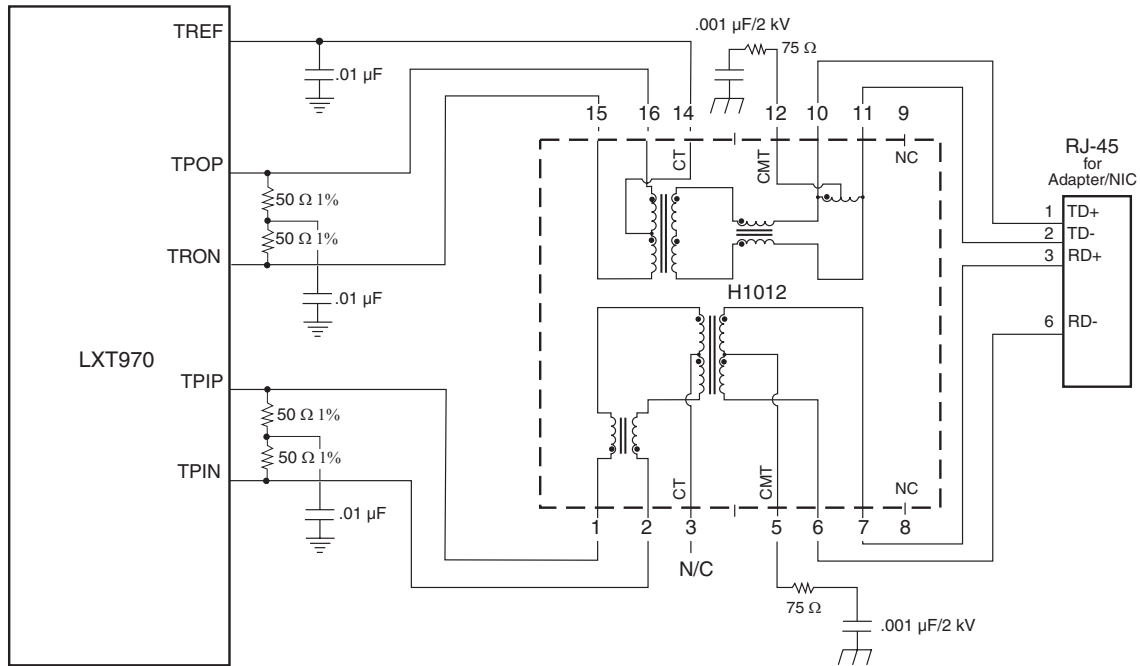

HX1148

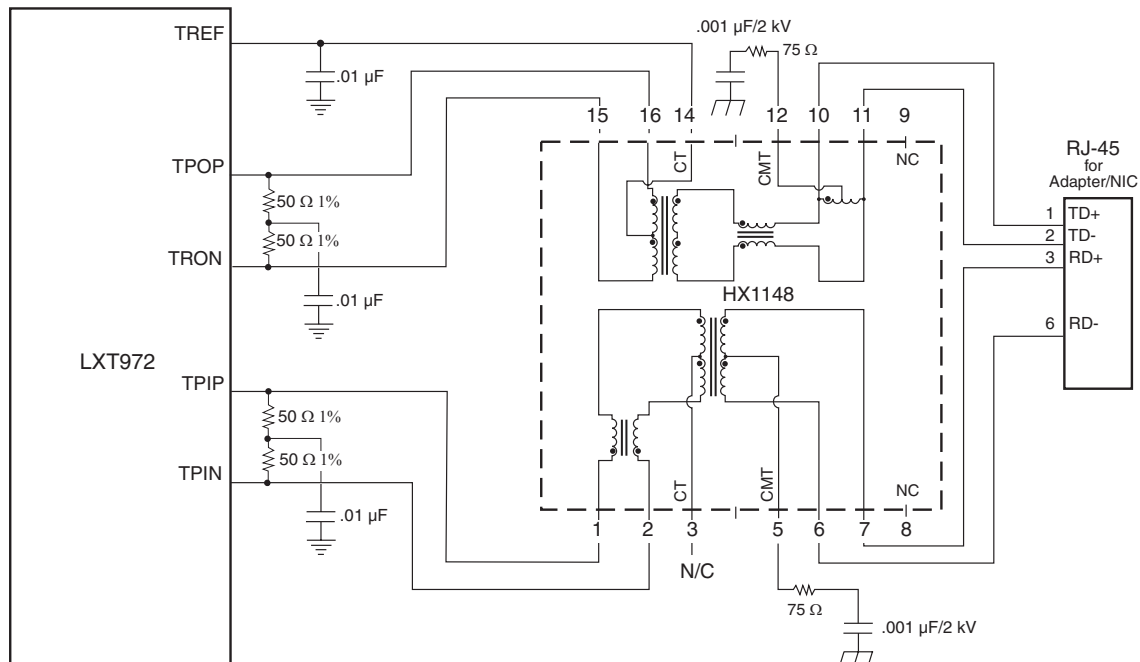


With 1:1 Transmit Turns Ratios




Tape & Reel Specifications

PE-68515L, PE-68517L, H1042NL

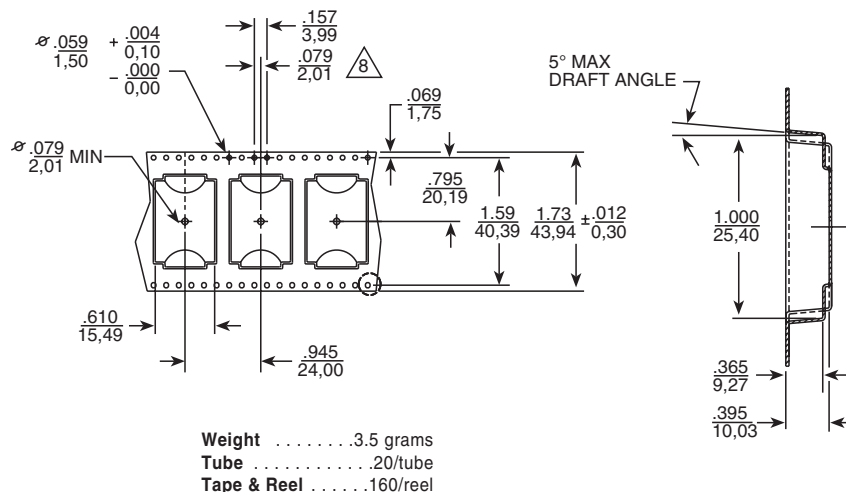

H1012, H1019, H1086, H1089, H1117,

H1138, H1338, HX1148, HX1178

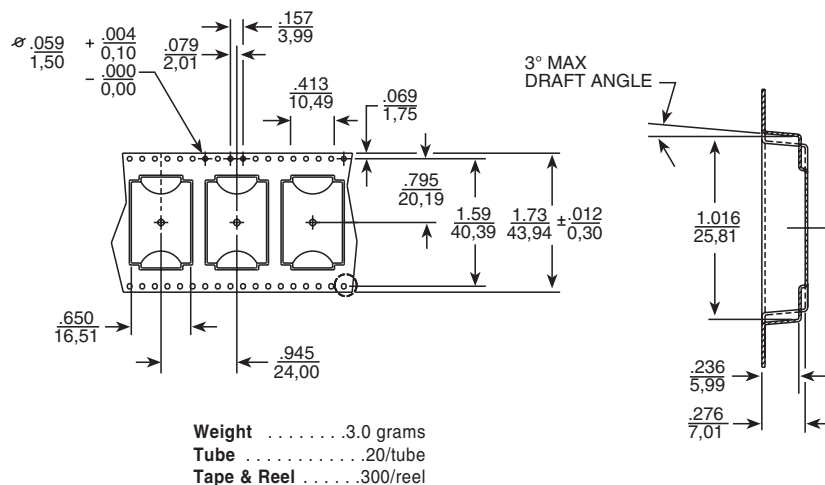

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

www.pulseeng.com

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 7806 0

Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen
Tech-Innovation International
Tenth Kejinan Rd.
High-Tech Industrial Park
Nanshan District, Shenzhen
China

Tel: 86 755 33966678

Fax: 86 755 33966700

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

Tel: 86 21 54643211/2

Fax: 86 21 54643210

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

Tel: 65 6287 8998

Fax: 65 6280 0080

Pulse North Asia

No. 26, Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan
R. O. C.

Tel: 886 3 4641811

Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2007. Pulse Engineering, Inc. All rights reserved.