



Data Sheet

Customer :

Product : High Power Schottky Diode

Part No.: MBRF1040CT/MBRF1060CT/MBRF10100CT/MBRF10150CT
MBRF10200CT/MBRF10250CT

Issued Date: 11-Jan-11

Edition : REV.A



VIKING TECH CORPORATION
光韻科技股份有限公司

No.70, Kuanfu N. Rad.,
Hsin Chu Industrial Park,
Hukou Hsiang, Hsin Chu Hsien,
303, Taiwan

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光韻科技股份有限公司高雄分公司

No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

WUXI TMTEC CO., LTD.
無錫泰銘電子有限公司

No.1A,(Xixia Road),Machinery & Industry Park,
National Hi-Tech Industrial Development Zone of
Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028

TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:wuxisales@tmtec.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
11-Jan-11	11-Jan-11	11-Jan-11	11-Jan-11	
Kris	Ann	J.C Liu		



10 Amperes High Power Schottky Barrier Rectifiers

Voltage : 40 to 250Volts

■ Features


- For use in low voltage, high frequency inverters, free wheeling and polarity protection applications
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- Guardring for over voltage protection
- Ultra high-speed switching
- Silicon epitaxial planar chip, metal silicon junction
- Lead-free parts meet environmental standards of MIL-STD-19500/228



■ Mechanical Data

Epoxy : UL94-V0 rated flame retardant
Case : JEDEC ITO-220AB molded plastic body over
Terminals : Axial leads, Solderable per MIL-STD-202, Method 208 guaranteed
Polarity : Color band denotes cathode end
Mounting Position : Any
Weight : Approximated 2.25 gram
Packaging : 50pcs per Tube

■ Package Dimensions in inches(millimeters): ITO-220AB

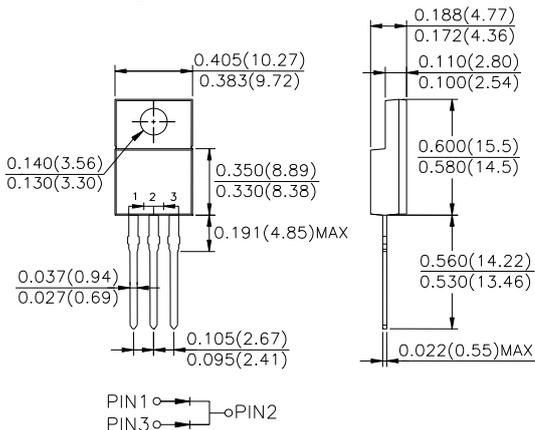

■ Maximum Ratings And Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

Parameter	Symbol	MBRF1040CT	MBRF1060CT	MBRF10100CT	MBRF10150CT	MBRF10200CT	MBRF10250CT	Unit
Marking Code		MBRF1040CT	MBRF1060CT	MBRF10100CT	MBRF10150CT	MBRF10200CT	MBRF10250CT	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	40	60	100	150	200	250	V
Maximum RMS Voltage	V_{RMS}	28	42	70	105	140	175	V
Maximum DC Blocking Voltage	V_{DC}	40	60	100	150	200	250	V
Maximum Forward Voltage@5A, $T_A=25^\circ\text{C}$	V_F	0.70	0.79	0.81	0.87	0.90	0.95	V
@5A, $T_A=125^\circ\text{C}$		0.57	0.70	0.71	0.77	0.80	0.85	
@10A, $T_A=25^\circ\text{C}$		0.84	0.95	0.95	1.0	1.0	-	
Operating Temperature	T_J	-50 ~ +150						$^\circ\text{C}$

Parameter	Conditions	Symbol	Min.	Typ.	Max.	Unit
Forward Rectified Current	See Fig.1	I_O			10	A
Forward Surge Current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}			125	A
Reverse Current	$V_R=V_{RRM}, T_A=25^\circ\text{C}$	I_R			0.1	mA
	$V_R=V_{RRM}, T_A=125^\circ\text{C}$				10	
Thermal Resistance	Junction to ambient	$R_{\theta JA}$		30		$^\circ\text{C}/\text{W}$
Diode Junction Capacitance	f=1MHz and applied 4V DC reverse voltage	C_J		150		pF
Storage Temperature		T_{STG}	-50		+150	$^\circ\text{C}$

Rated and Characteristic Curve

Fig. 1 - Forward Current Derating Curve

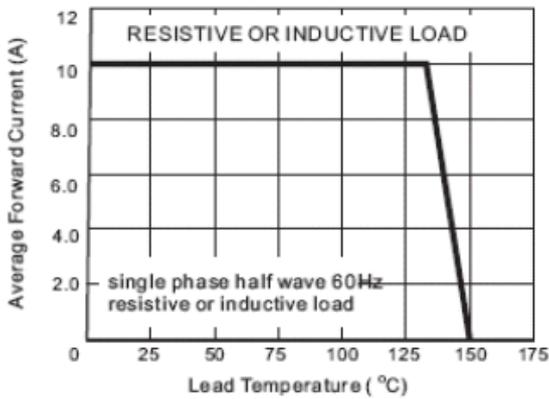


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

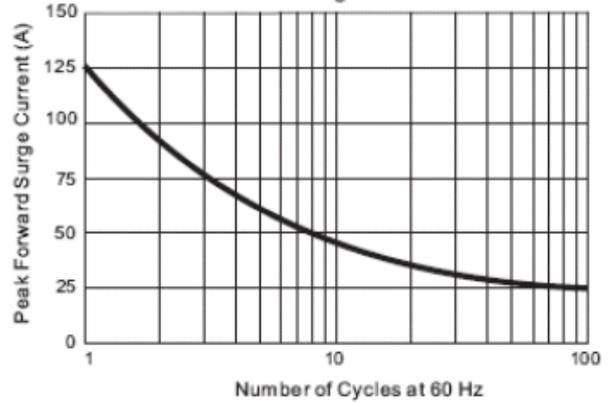


Fig. 3.1 - Typical Instantaneous Forward Characteristics

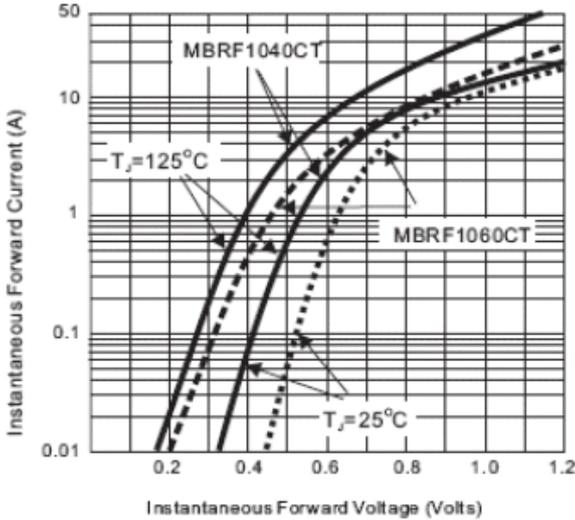


Fig. 3.2 - Typical Instantaneous Forward Characteristics

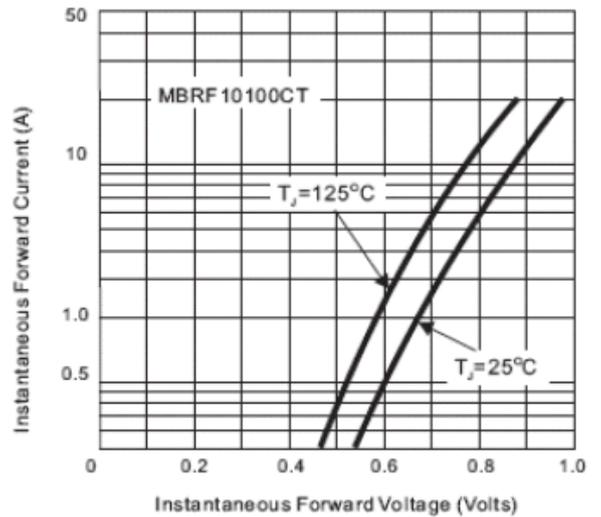


Fig. 3.3 - Typical Instantaneous Forward Characteristics

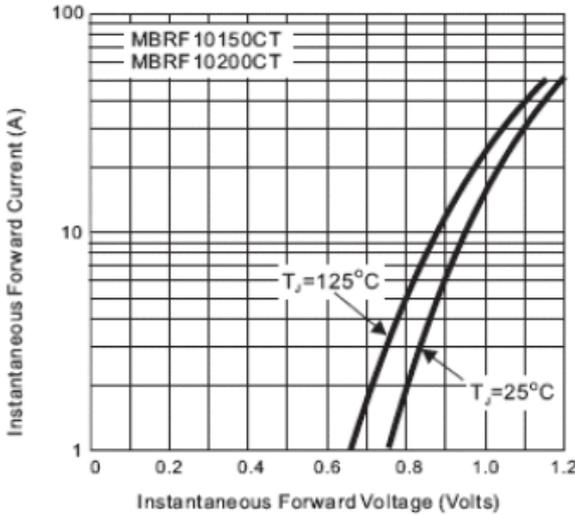


Fig. 4 - Typical Reverse Characteristics

