


Spice Model**1N5554****Electrical Characteristics and Maximum Ratings**

Part Number	Working Reverse Voltage (V _{rwm})	Average Rectified Current (I _o)		Reverse Current @ V _{rwm} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current tp=8.3ms (I _{frm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (3) (T _{rr})	Thermal Impedance θ _{J-L}		Junction Cap. @50VDC @ 1kHz (C _j)	
		55°C(1)	100°C(2)	25°C	100°C	25°C		25°C	25°C	L=.125	L=.375	L=.500	25°C	
		Volts	Amps	Amps	μA	μA	Volts	Amps	Amps	ns	°C/W	°C/W	°C/W	pF
1N5552	600	5.0	2.0	1.0	25	1.2	9.0	150	25	2000	9	20	25	35

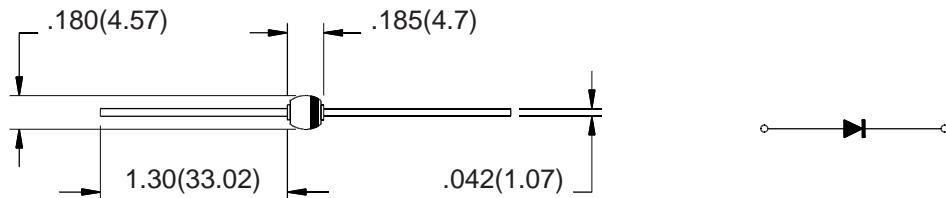

Name	Parameter	Value	Units
I _s	Reverse leakage current	5.00E-07	Amps
N	Emission coefficient	2.1	
T	Temperature	25	C
R _S	Diode series resistance	0.01	Ohm
T _T	Transit time	500	nS
C _{jo}	Zero-bias junction capacitance	122.20	pF
V _J	Bulk junction potential	0.80	Volts
M	Grading coefficient	0.5	
E _G	Energy-band gap	1.11	Volts
X _{TI}	Temperature coefficient	3	
K _F	Flicker-noise coefficient	0	
A _F	Flicker-noise exponent	1	
F _C	Coefficient for capacitance	0.5	
B _V	Diode breakdown voltage	880	Volts
I _{BV}	Diode breakdown current	100	uAmps

Dimensions: In. (mm) * All temperatures are ambient unless otherwise noted. * Data subject to change without notice.



Voltage Multipliers, Inc.
8711 W. Roosevelt Ave.
Visalia, CA 93291

Tel (559) 651-1402
Fax (559) 651-0740
www.voltagemultipliers.com