

isc Silicon NPN Power Transistor
2SC3058
DESCRIPTION



- High Collector-Emitter Sustaining Voltage-
: $V_{CEO(sus)} = 400V(\text{Min})$
- High Switching Speed
- Wide Area of Safe Operation
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Switching regulators
- Motor controls
- Ultrasonic generators
- Class C and D amplifiers
- Deflection circuits

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	600	V
V_{CEO}	Collector-Emitter Voltage	400	V
V_{EBO}	Emitter-Base voltage	7	V
I_C	Collector Current-Continuous	30	A
I_{CM}	Collector Current-Peak	50	A
I_B	Base Current-Continuous	10	A
P_C	Collector Power Dissipation @ $T_C = 25^\circ\text{C}$	200	W
T_J	Junction Temperature	175	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-65~175	$^\circ\text{C}$

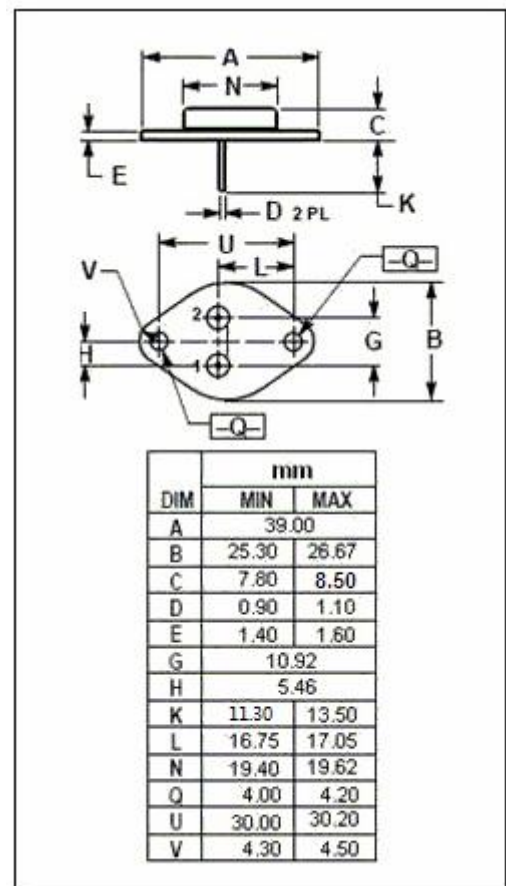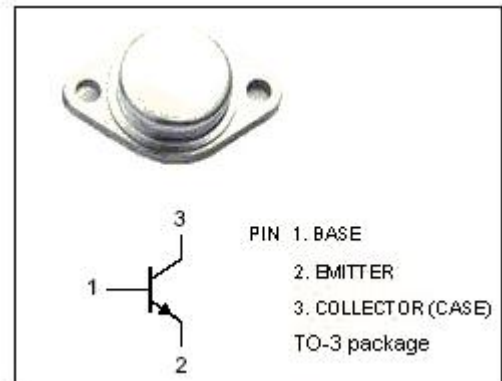

isc Silicon NPN Power Transistor

2SC3058

ELECTRICAL CHARACTERISTICS

T_c=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO(SUS)}	Collector-Emitter Sustaining Voltage	I _C = 30mA; R _{BE} = ∞	400			V
V _{(BR)CBO}	Collector-Base Breakdown Voltage	I _C = 1 mA; I _E = 0	600			V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage	I _E = 1mA; I _C = 0	7			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = 20A; I _B = 4A			1.0	V
V _{BE(sat)}	Base-Emitter Saturation Voltage	I _C = 20A; I _B = 4A			1.5	V
I _{CBO}	Collector Cutoff Current	V _{CB} = 500V; I _E = 0 V _{CB} = 500V; I _E = 0; T _C = 100°C			0.1 2.0	mA
I _{EBO}	Emitter Cutoff Current	V _{EB} = 6V; I _C = 0			100	μA
h _{FE}	DC Current Gain	I _C = 20A; V _{CE} = 5V	10		40	
f _T	Current-Gain—Bandwidth Product	I _C = 4A; V _{CE} = 10V	15			MHz
C _{OB}	Output Capacitance	I _E = 0; V _{CB} = 10V; f _{test} = 1.0MHz		420		pF

Switching times

t _r	Rise Time	I _C = 20A, I _{B1} = -I _{B2} = 4A; V _{CC} = 150V			0.5	μs
t _{stg}	Storage Time				3.0	μs
t _f	Fall Time				0.3	μs

Notice:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.