


Features


- For high-frequency Amplification
Complementary to 2SA1532
- Optimum for RF amplification of FM/AM radios
- High transition frequency fT



SOT-323 top view



Schematic diagram



Marking and pin assignment



Halogen-Free

Maximum Ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	30	V
V_{CEO}	Collector-Emitter Voltage	20	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current	30	mA
P_C	Collector Power Dissipation	150	mW
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
2SC3930	SOT-323	VB/VC	3,000	45,000	180,000	7"reel




Electrical Characteristics (Ta=25°C unless otherwise specified)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=100\mu A, I_E=0$	30	--	--	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=100\mu A, I_B=0$	20	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=100\mu A, I_C=0$	5	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB}=10V, I_E=0$	--	--	0.1	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=5V, I_C=0$	--	--	0.1	μA
H_{FE}	DC current gain	$V_{CE}=10V, I_C=1mA$	70	--	220	
f_T	Transition frequency	$V_{CE}=10V, I_E=1mA, f=200MHz$	150	--	--	MHz
C_{re}	Reverse Transfer capacitance	$V_{CB}=10V, I_C=1mA, f=10.7MHz$	--	--	1.5	pF
NF	Noise Figure	$V_{CB}=10V, I_C=1mA, f=5MHz$	--	--	4	dB
Z_{rb}	Reverse transfer impedance	$V_{CB}=10V, I_C=1mA, f=2MHz$	--	--	50	Ω

Classification of hFE

Rank	B	C
Marking	VB	VC
Range	70-140	110-220

SOT-323 Package information

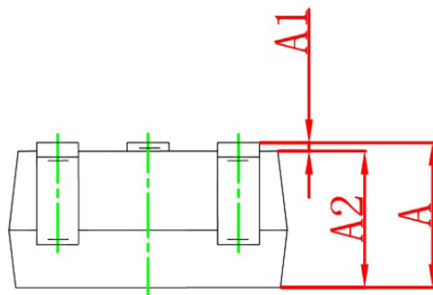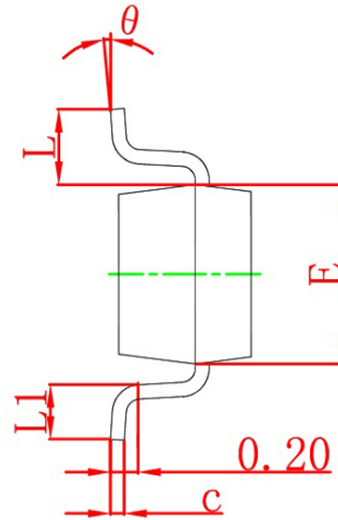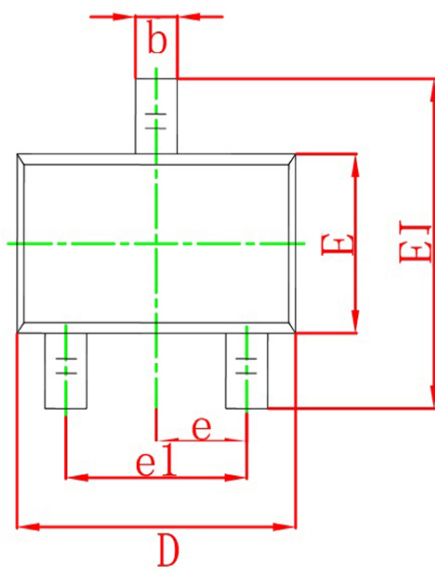

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650TYP		0.026TYP	
e1	1.200	1.400	0.047	0.055
L	0.525REF		0.021REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°