

2SD1252, 2SD1252A

Silicon NPN triple diffusion planar type

For power amplification

Complementary to 2SB929 and 2SB929A

Features

- High forward current transfer ratio h_{FE} which has satisfactory linearity
- Low collector to emitter saturation voltage $V_{CE(sat)}$
- N type package enabling direct soldering of the radiating fin to the printed circuit board, etc. of small electronic equipment.

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$)


Parameter	Symbol	Ratings	Unit	
Collector to base voltage	2SD1252 2SD1252A	V_{CBO}	60	V
			80	
Collector to emitter voltage	2SD1252 2SD1252A	V_{CEO}	60	V
			80	
Emitter to base voltage	V_{EBO}	6	V	
Peak collector current	I_{CP}	5	A	
Collector current	I_C	3	A	
Collector power dissipation	P_C	35	$T_C=25^\circ\text{C}$	W
			$T_a=25^\circ\text{C}$	
Junction temperature	T_j	150	$^\circ\text{C}$	
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$	

Electrical Characteristics ($T_C=25^\circ\text{C}$)


Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	2SD1252	I_{CES}			200	μA
	2SD1252A				200	
Collector cutoff current	2SD1252	I_{CEO}	$V_{CE} = 30\text{V}, I_B = 0$		300	μA
	2SD1252A				300	
Emitter cutoff current	I_{EBO}	$V_{EB} = 6\text{V}, I_C = 0$			1	mA
Collector to emitter voltage	2SD1252	V_{CEO}	$I_C = 30\text{mA}, I_B = 0$	60		V
	2SD1252A			80		
Forward current transfer ratio		h_{FE1}^*	$V_{CE} = 4\text{V}, I_C = 1\text{A}$	40	250	
		h_{FE2}	$V_{CE} = 4\text{V}, I_C = 3\text{A}$	10		
Base to emitter voltage	V_{BE}	$V_{CE} = 4\text{V}, I_C = 3\text{A}$			1.8	V
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = 3\text{A}, I_B = 0.375\text{A}$			1.2	V
Transition frequency	f_T	$V_{CE} = 5\text{V}, I_C = 0.5\text{A}, f = 10\text{MHz}$		30		MHz
Turn-on time	t_{on}	$I_C = 1\text{A}, I_{B1} = 0.1\text{A}, I_{B2} = -0.1\text{A}, V_{CC} = 50\text{V}$		0.5		μs
Storage time	t_{stg}			2.5		μs
Fall time	t_f			0.4		μs

* h_{FE1} Rank classification


Rank	R	Q	P
h_{FE1}	40 to 90	70 to 150	120 to 250

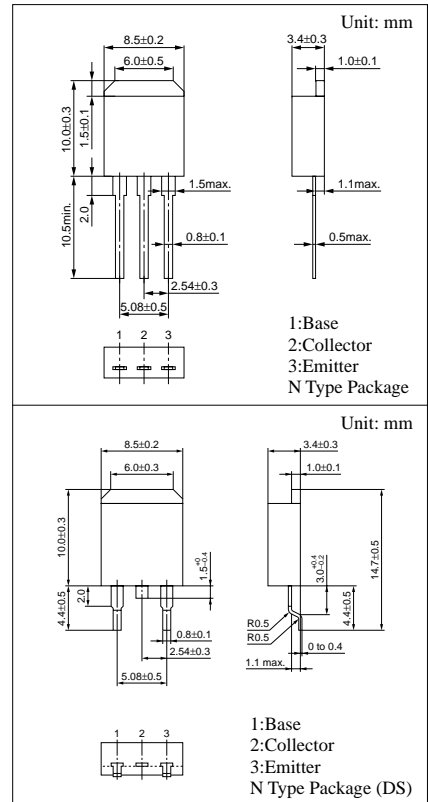


$P_C - T_a$

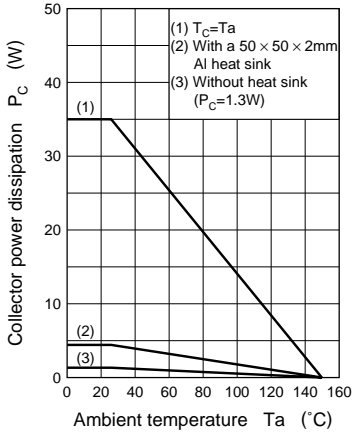


$I_C - V_{CE}$

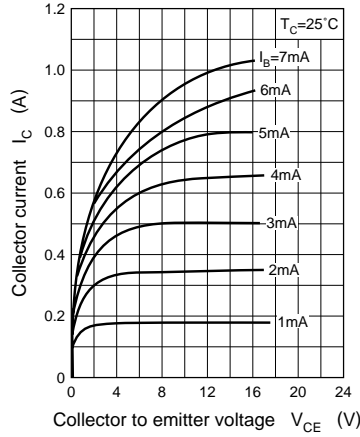


$I_C - V_{BE}$

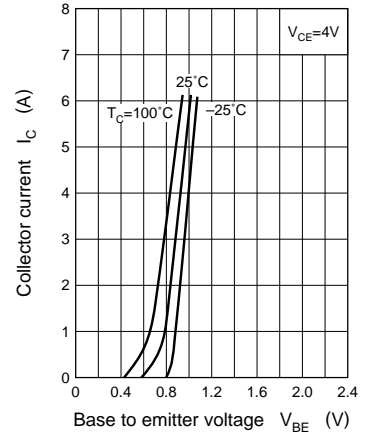


$V_{CE(sat)} - I_C$

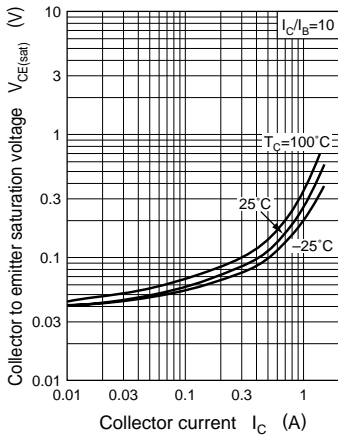


$h_{FE} - I_C$

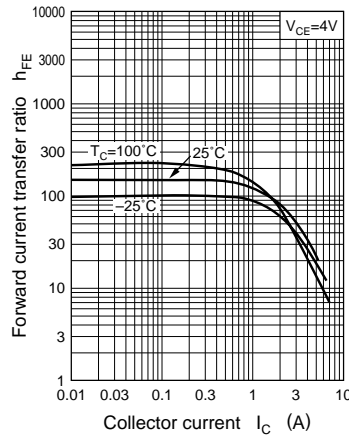

$f_T - I_C$

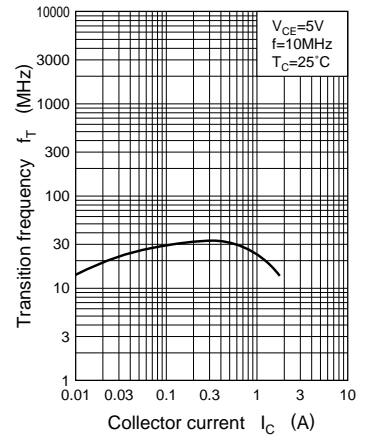

Area of safe operation (ASO)

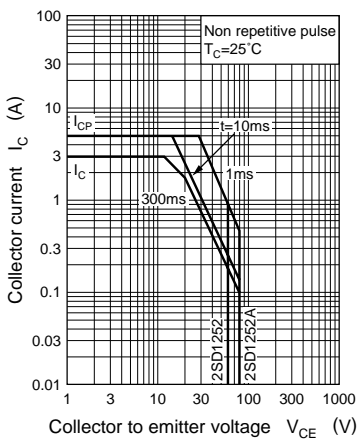

$R_{th(t)} - t$

