NEC

N-CHANNEL MOS FIELD EFFECT POWER TRANSISTOR

2SK773

DESCRIPTION The 2SK773 is N-channel MOD Field Effect Power Transistor designed for switching power supplies DC-DC converters.

FEATURES

- Suitable for switching power supplies, actuater controls, and pulse circuits.
- Low R_{DS}(on)
- No second breakdown

PACKAGE DIMENSIONS
in millimeters (inches)

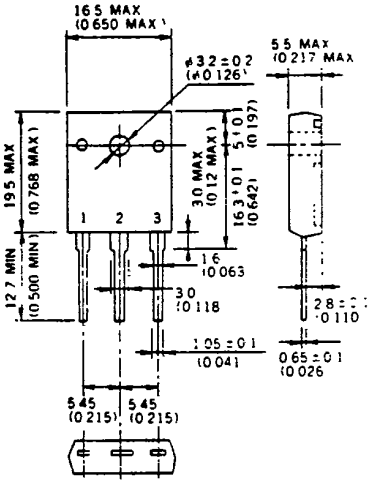

1. Gate
2. Drain (Fin)
3. Source

ABSOLUTE MAXIMUM RATINGS

Maximum Temperatures

- Storage Temperature . . . . . −55 to +150 °C
- Channel Temperature . . . . . 150 °C Maximum

Maximum Power Dissipation (T_C = 25 °C)

- Total Power Dissipation . . . . . 120 W

Maximum Voltages and Currents (T_a = 25 °C)

- V_{DSS} Drain to Source Voltage . . . . . 500 V
- V_{GSS} Gate to Source Voltage . . . . . ±20 V
- $I_{D(DC)}$ Drain Current (DC) . . . . . ±12 A
- $I_{D(pulse)}$ Drain Current (pulse)* . . . . . ±40 A

* PW ≦ 100 μs, Duty Cycle ≦ 2 %

ELECTRICAL CHARACTERISTICS (T_a = 25 °C)

SYMBOL	CHARACTERISTIC	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
I_{DSS}	Drain Leakage Current			100	μA	V_{DS} = 500 V, V_{GS} = 0
I_{GSS}	Gate to Source Leakage Current			±100	nA	V_{GS} = ±20 V, V_{DS} = 0
$V_{GS(off)}$	Gate to Source Cutoff Voltage	1.5		3.5	V	V_{DS} = 10 V, I_D = 1 mA
$\|y_{fs}\|$	Forward Transfer Admittance	5.0			S	V_{DS} = 10 V, I_D = 6 A
$R_{DS(on)}$	Drain to Source On-State Resistance		0.47	0.60	Ω	V_{GS} = 10 V, I_D = 6 A
C_{iss}	Input Capacitance		2200		pF	
C_{oss}	Output Capacitance		480		pF	V_{DS} = 10 V, V_{GS} = 0, f = 1 MHz
C_{rss}	Reverse Transfer Capacitance		130		pF	
$t_{d(on)}$	Turn-On Delay Time		30		ns	I_D = 6 A, V_{CC} ≒ 150 V
t_r	Rise Time		45		ns	$V_{GS(on)}$ = 10 V
$t_{d(off)}$	Turn-Off Delay Time		120		ns	R_L = 25 Ω
t_f	Fall Time		45		ns	R_{in} = 10 Ω

TYPICAL CHARACTERISTICS (T_a = 25 °C)

DERATING FACTOR OF FORWARD BIAS SAFE OPERATING AREA

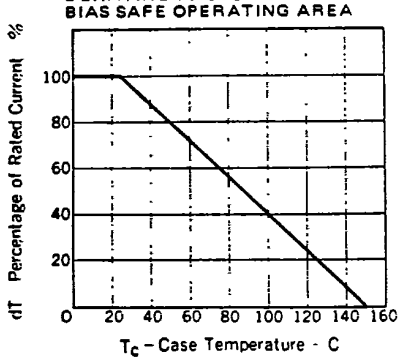

TOTAL POWER DISSIPATION vs. CASE TEMPERATURE

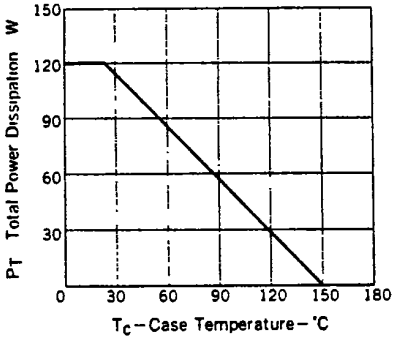

FORWARD BIAS SAFE OPERATING AREA

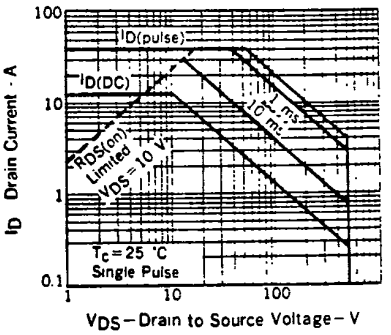

DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE

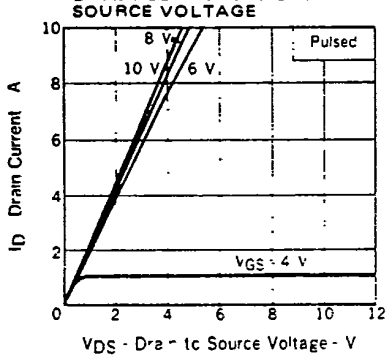

FORWARD TRANSFER ADMITTANCE vs. DRAIN CURRENT

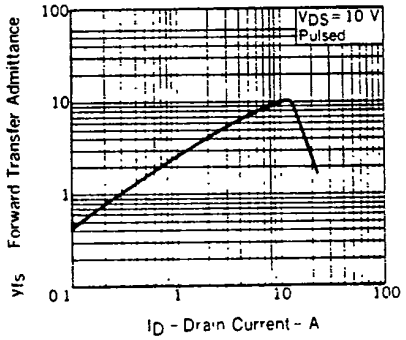

SOURCE TO DRAIN DIODE FORWARD VOLTAGE

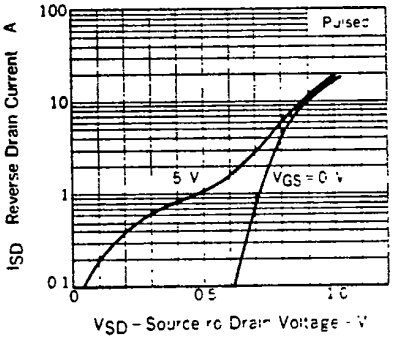

CAPACITANCE vs. DRAIN TO SOURCE VOLTAGE

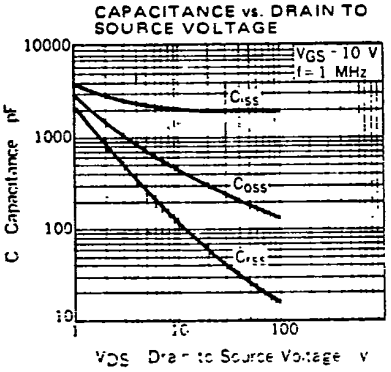

DRAIN TO SOURCE ON-STATE RESISTANCE vs. GATE TO SOURCE VOLTAGE

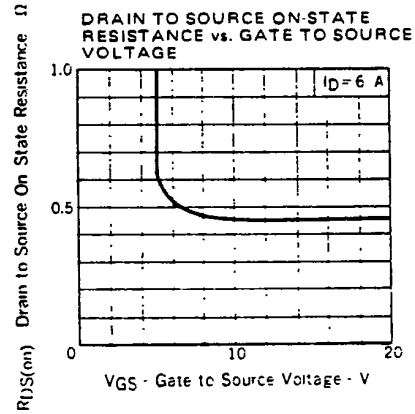

DRAIN TO SOURCE ON-STATE RESISTANCE vs. CHANNEL TEMPERATURE

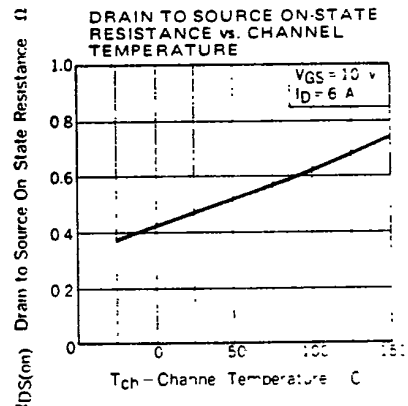

DRAIN TO SOURCE ON-STATE RESISTANCE vs. DRAIN CURRENT

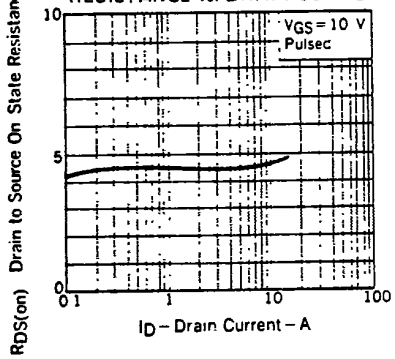

TRANSFER CHARACTERISTICS

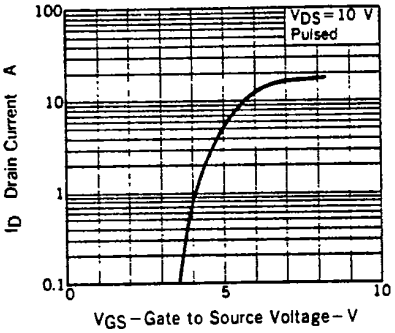

GATE TO SOURCE CUTOFF VOLTAGE vs. CHANNEL TEMPERATURE

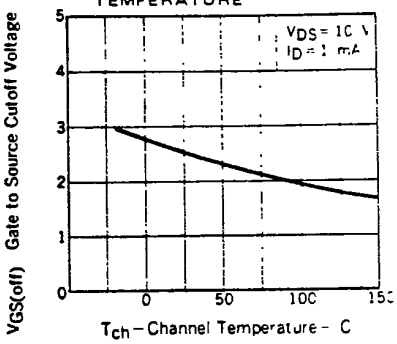

SWITCHING CHARACTERISTICS

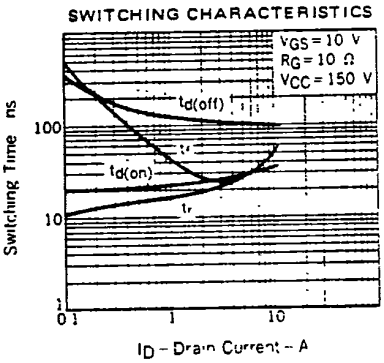

SWITCHING TIME TEST CIRCUIT