

6CW4

High-Mu Triode

NUVISTOR TYPE

For Use as Grounded-Cathode, Neutralized RF-Amplifier
Tube in Tuners of VHF Television and FM Receivers

GENERAL DATA

Electrical:

Heater Characteristics and Ratings (*Design-Maximum Values*):

Voltage (AC or DC)	6.3 ± 0.6	volts
Current at heater volts = 6.3	0.135	amp

Peak heater-cathode voltage:

Heater negative with respect to cathode	100 max.	volts
Heater positive with respect to cathode	100 max.	volts

Direct Interelectrode Capacitances (Approx.):

Grid to plate	0.92	pf
Grid to cathode, shell, and heater	4.3	pf
Plate to cathode, shell, and heater	1.8	pf
Plate to cathode	0.18	pf
Heater to cathode	1.6	pf

Characteristics, Class A₁ Amplifier:

Plate Supply Voltage	110	volts
Grid Supply Voltage	0	volts
Cathode Resistor	130	ohms
Amplification Factor	65	
Plate Resistance (Approx.)	6600	ohms
Transconductance	9800	μmhos
Plate Current	7	ma
Grid Voltage (Approx.) for plate $\mu a = 10$	-4	volts

Mechanical:

Operating Position	Any
Type of Cathode	Coated Unipotential
Maximum Overall Length	0.800"
Maximum Seated Length	0.625"
Maximum Diameter	0.440"
Envelope	Metal Shell MT4
Socket	Cinch Mfg. Corp. No. 133 65 10 001, Industrial Electronic Hardware Co. No. Nu 5044 or No. Nu 5060, or equivalent
Base	Medium Ceramic-Wafer Twelvar 5-Pin (JEDEC No. E5-65)


← Indicates a change.



6CW4

Basing Designation for BOTTOM VIEW. 12A0

- Pin 1^a - Do Not Use
- Pin 2 - Plate
- Pin 3 - Same as Pin 1
- Pin 4 - Grid
- Pin 5 - Same as Pin 1
- Pin 6 - Same as Pin 1
- Pin 7 - Same as Pin 1
- Pin 8 - Cathode
- Pin 9 - Same as Pin 1
- Pin 10 - Heater
- Pin 12 - Heater



AMPLIFIER — Class A₁

Maximum Ratings, Design-Maximum Values:

PLATE SUPPLY VOLTAGE.	300 ^b max.	volts
→ PLATE VOLTAGE	135 max.	volts
GRID VOLTAGE:		
Negative-bias value	55 max.	volts
Peak-positive value	0 max.	volts
CATHODE CURRENT	15 max.	ma
→ PLATE DISSIPATION:		
With a minimum series plate-circuit		
resistance of 5000 ohms	1.5 max.	watts
For lower values of series		
plate-circuit resistance.	See accompanying <i>Plate-Dissipation-Rating Chart</i>	

Typical Operation:

Plate Voltage	70	volts
Grid Supply Voltage	0	volts
Grid Resistor	47000	ohms
Amplification Factor.	68	
Plate Resistance (Approx.).	5440	ohms
Transconductance.	12500	μmhos
→ Plate Current.	7.2	ma



Maximum Circuit Values:

Grid-Circuit Resistance: ^c		
For fixed-bias operation.	0.5 max.	megohm
For cathode-bias operation.	2.2 max.	megohms

- ^a Pin 1 is of a length such that its end does not touch the socket insertion plane.
- ^b A plate supply voltage of 300 volts may be used provided sufficient plate-circuit resistance and agc voltage are used to limit the voltage at the plate of the tube to 135 volts under conditions of maximum-rated plate dissipation (1.5 watts).
- ^c For operation at metal-shell temperatures up to 135° C.

→ Indicates a change.

6CW4

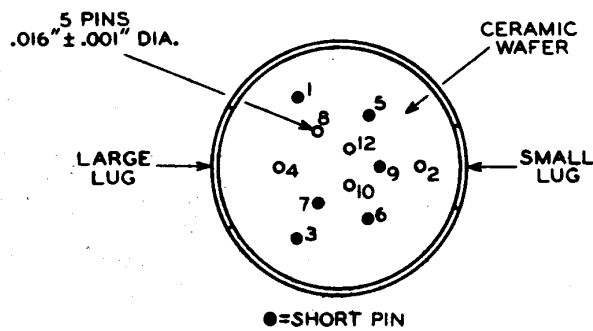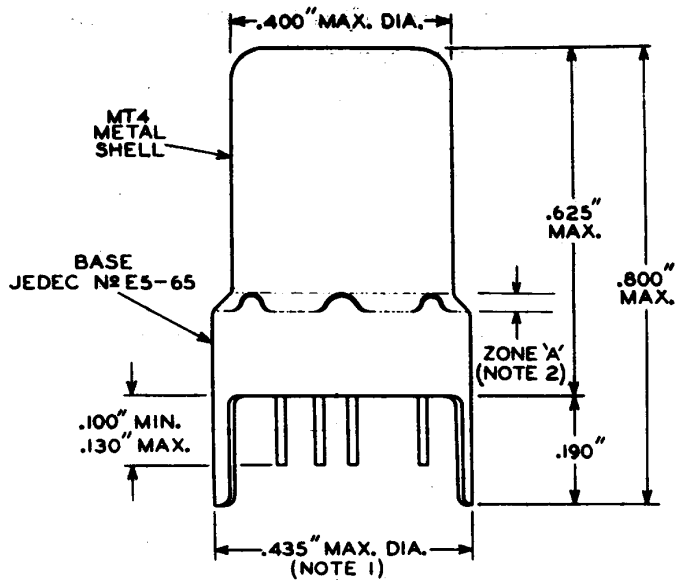

92CS-10970R3

NOTE 1: MAXIMUM OUTSIDE DIAMETER OF 0.440" IS PERMITTED ALONG 0.190" LUG LENGTH.

NOTE 2: SHELL TEMPERATURE SHOULD BE MEASURED IN ZONE "A" BETWEEN BROKEN LINES.




RADIO CORPORATION OF AMERICA
Electron Tube Division
Harrison, N. J.

DATA 2
1-63

6CW4

PLATE-DISSIPATION-RATING CHART

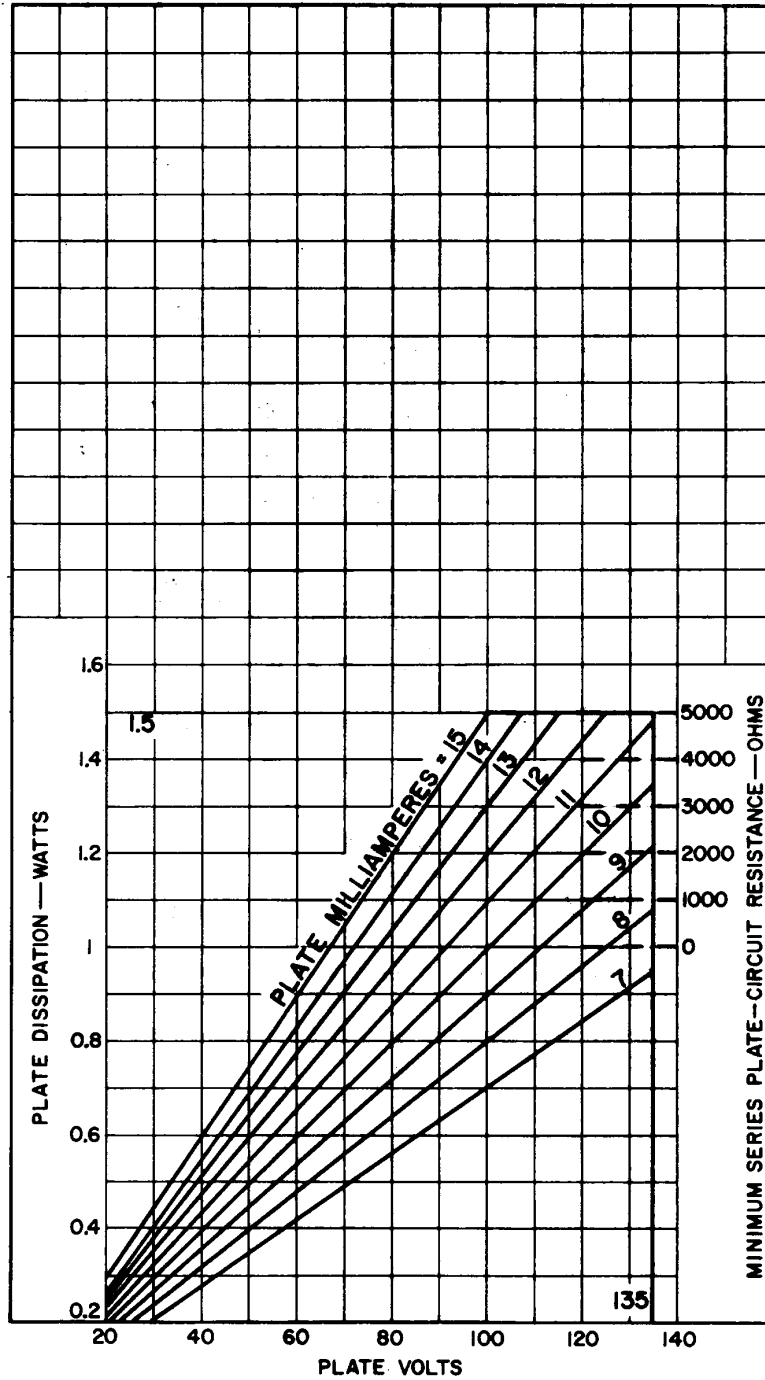

92CM-11681


RADIO CORPORATION OF AMERICA
Electron Tube Division

Harrison, N. J.



6CW4

AVERAGE PLATE CHARACTERISTICS

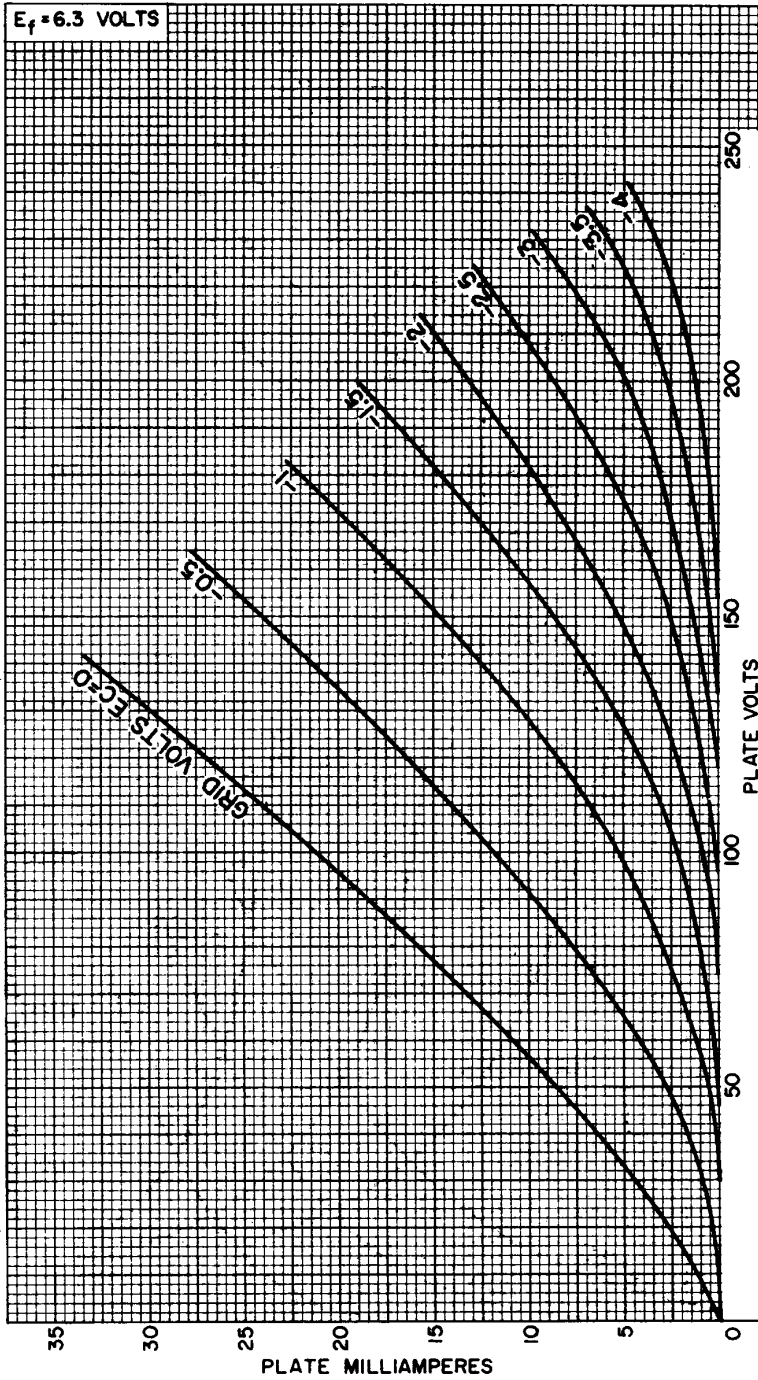

92CM-10524RI




RADIO CORPORATION OF AMERICA
Electron Tube Division
Harrison, N. J.

DATA 3
1-63

6CW4

AVERAGE CHARACTERISTICS

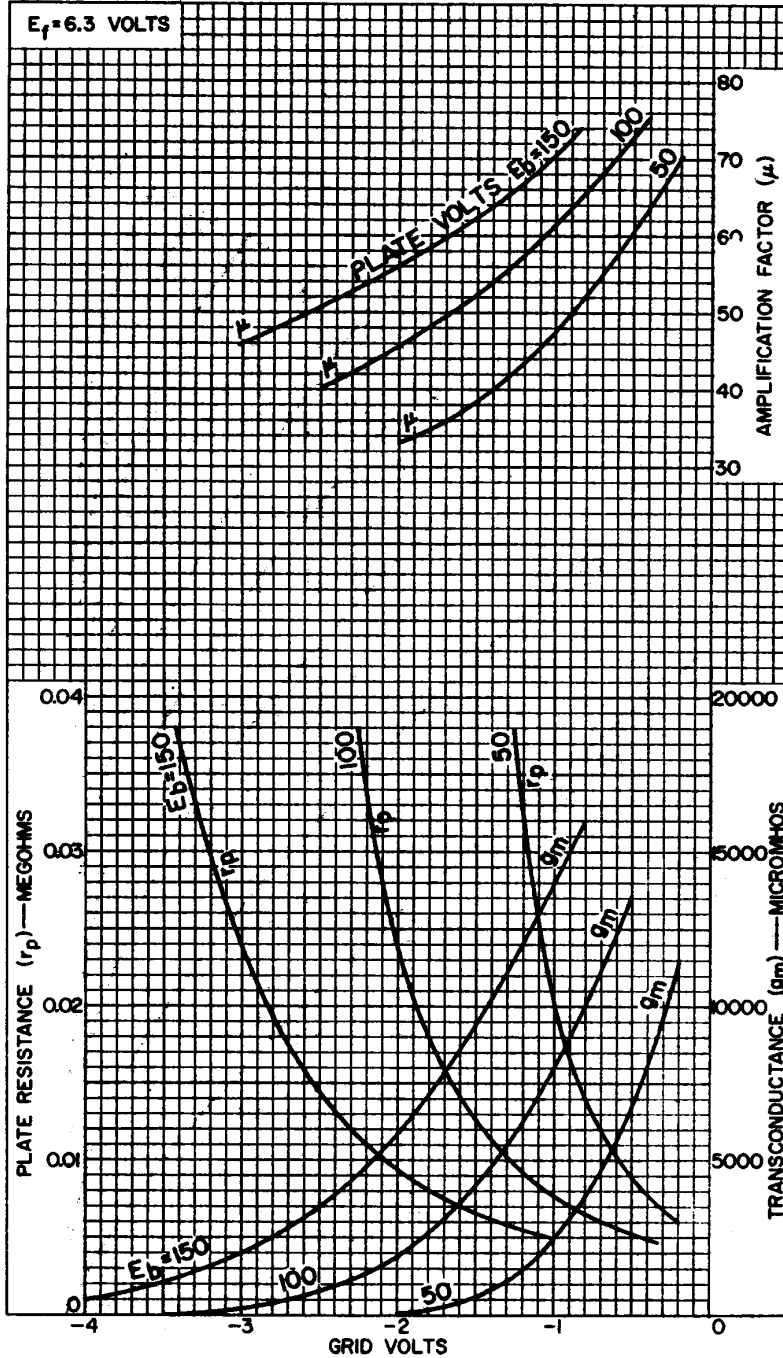

92CM-10520R1

RADIO CORPORATION OF AMERICA
Electron Tube Division

Harrison, N. J.

