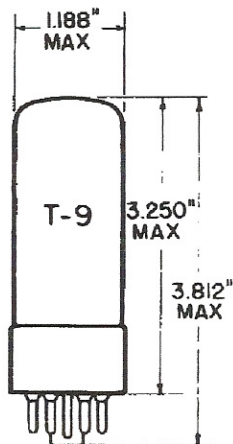


TUNG-SOL**HALF-WAVE VACUUM RECTIFIER**

GLASS BULB
JEDEC GROUP 1 B5-85
SHORT
INTERMEDIATE-SHELL
5 PIN OCTAL
WITH EXTERNAL BARRIERS

PINS 1, 4, & 6 ARE OMITTED

OUTLINE DRAWING
JEDEC 9-44


UNIPOTENTIAL CATHODE

HEATER

6.3 ± 0.6 VOLTS 1.6 AMP.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW

BASING DIAGRAM
JEDEC 4CG

THE 6DE4 IS A HALF-WAVE VACUUM RECTIFIER OF THE GLASS-OCTAL TYPE. IT IS DESIGNED SPECIFICALLY FOR USE AS A DAMPER DIODE IN HORIZONTAL-DEFLECTION CIRCUITS OF BLACK-AND-WHITE TELEVISION RECEIVERS.

EXCEPT FOR HEATER RATINGS AND HEATER WARM-UP TIME, THE 6DE4 IS IDENTICAL TO THE 17DE4 AND 22DE4.

DIRECT INTERELECTRODE CAPACITANCES - APPROX.
WITHOUT EXTERNAL SHIELD

PLATE TO HEATER AND CATHODE	8.5	$\mu\mu\text{f}$
CATHODE TO HEATER AND PLATE	11.5	$\mu\mu\text{f}$
HEATER TO CATHODE	4	$\mu\mu\text{f}$


RATINGS

INTERPRETED ACCORDING TO DESIGN MAXIMUM SYSTEM
DAMPER SERVICE

MAXIMUM PEAK INVERSE PLATE VOLTAGE	→ 5500 ^A	VOLTS
MAXIMUM PEAK PLATE CURRENT	1100	MA.
MAXIMUM DC PLATE CURRENT	→ 180	MA.
MAXIMUM PLATE DISSIPATION	6.5	WATTS
MAXIMUM PEAK HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE	→ 5500 ^B	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	300 ^C	VOLTS

→ INDICATES A CHANGE.

CONTINUED ON FOLLOWING PAGE

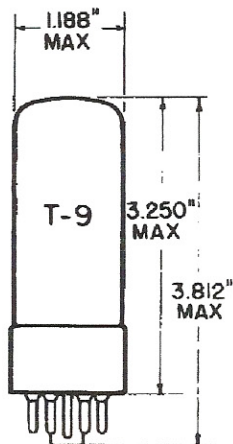TUNG-SOL**HALF-WAVE VACUUM RECTIFIER**

GLASS BULB
JEDEC GROUP 1 B5-85
SHORT
INTERMEDIATE-SHELL
5 PIN OCTAL
WITH EXTERNAL BARRIERS

PINS 1, 4, & 6 ARE OMITTED

OUTLINE DRAWING
JEDEC 9-44


UNIPOTENTIAL CATHODE

HEATER

6.3±0.6 VOLTS 1.6 AMP.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW

BASING DIAGRAM
JEDEC 4CG

THE 6DE4 IS A HALF-WAVE VACUUM RECTIFIER OF THE GLASS-OCTAL TYPE. IT IS DESIGNED SPECIFICALLY FOR USE AS A DAMPER DIODE IN HORIZONTAL-DEFLECTION CIRCUITS OF BLACK-AND-WHITE TELEVISION RECEIVERS.

EXCEPT FOR HEATER RATINGS AND HEATER WARM-UP TIME, THE 6DE4 IS IDENTICAL TO THE 17DE4 AND 22DE4.

DIRECT INTERELECTRODE CAPACITANCES - APPROX.
WITHOUT EXTERNAL SHIELD

PLATE TO HEATER AND CATHODE	8.5	μμf
CATHODE TO HEATER AND PLATE	11.5	μμf
HEATER TO CATHODE	4	μμf

RATINGS

INTERPRETED ACCORDING TO DESIGN MAXIMUM SYSTEM
DAMPER SERVICE

MAXIMUM PEAK INVERSE PLATE VOLTAGE	→ 5500 ^A	VOLTS
MAXIMUM PEAK PLATE CURRENT	1100	MA.
MAXIMUM DC PLATE CURRENT	→ 180	MA.
MAXIMUM PLATE DISSIPATION	6.5	WATTS
MAXIMUM PEAK HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE	→ 5500 ^B	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	300 ^C	VOLTS

→ INDICATES A CHANGE.

CONTINUED ON FOLLOWING PAGE