


N-Channel Enhancement Mode MOSFET

Features

- 30V/3.5A, $R_{DS(ON)} = 70m\Omega$ (typ.) @ $V_{GS} = 5V$
 $R_{DS(ON)} = 42m\Omega$ (typ.) @ $V_{GS} = 10V$
- Super High Dense Cell Design
- High Power and Current Handling Capability
- SOT-23 Package

Pin Description



Top View of SOT-23

Applications

- Switching Regulators
- Switching Converters

Ordering and Marking Information

APM2306 □□-□□ Handling Code Temp. Range Package Code	Package Code A : SOT-23 Operating Junction Temp. Range C : -55 to 150°C Handling Code TR : Tape & Reel
APM2306 A : □□□□ M06X	X - Date Code

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter		Rating	Unit
V_{DSS}	Drain-Source Voltage		30	V
V_{GSS}	Gate-Source Voltage		± 20	
I_D	Maximum Pulsed Drain Current (pulse width $\leq 300\mu\text{s}$)		3.5	A
I_{DM}	Maximum Drain Current – Pulsed		16	
P_D	Maximum Power Dissipation	$T_A = 25^\circ\text{C}$	1.25	W
		$T_A = 100^\circ\text{C}$	0.5	W
T_J	Maximum Junction Temperature		150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range		-55 to 150	$^\circ\text{C}$


ANPEC reserves the right to make changes to improve reliability or manufacturability without notice, and advise customers to obtain the latest version of relevant information to verify before placing orders.

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Symbol	Parameter	Test Condition	APM2306			Unit
			Min.	Typ.	Max.	
Static						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250μA	30			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =24V, V _{GS} =0V			1	μA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250μA	1	1.5		V
I _{GSS}	Gate Leakage Current	V _{GS} =±20V, V _{DS} =0V			±100	nA
R _{DS(ON)}	Drain-Source On-state Resistance	V _{GS} =5V, I _{DS} =2.8A		70	90	mΩ
		V _{GS} =10V, I _{DS} =3.5A		42	65	
V _{SD}	Diode Forward Voltage	I _{SD} =1.25A, V _{GS} =0V		1.1	1.5	V
Dynamic						
Q _g	Total Gate Charge	V _{DS} =15V, V _{GS} =5V, I _D =3.5A		12.5		nC
Q _{gs}	Gate-Source Charge			3.7		nC
Q _{gd}	Gate-Drain Charge			2.4		nC
t _{d(ON)}	Turn-on Delay Time	V _{DD} =15V,I _D =1A, V _{GS} =10V, R _G =6Ω		10		ns
t _r	Turn-on Rise Time			8		ns
t _{d(OFF)}	Turn-off Delay Time			19		ns
t _f	Turn-off Fall Time			6.2		ns
C _{iss}	Input Capacitance	V _{GS} =0V		410		pF
C _{oss}	Output Capacitance	V _{DS} =15V		80		pF
C _{rss}	Reverse Transfer Capacitance	Frequency=1.0MHz		45		pF

Typical Characteristics


Output Characteristics

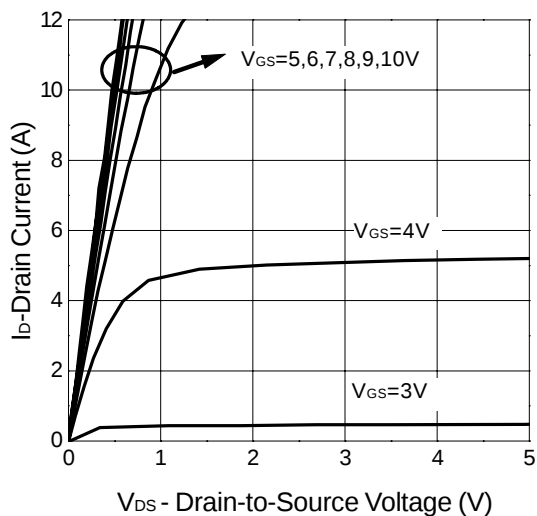


Transfer Characteristics

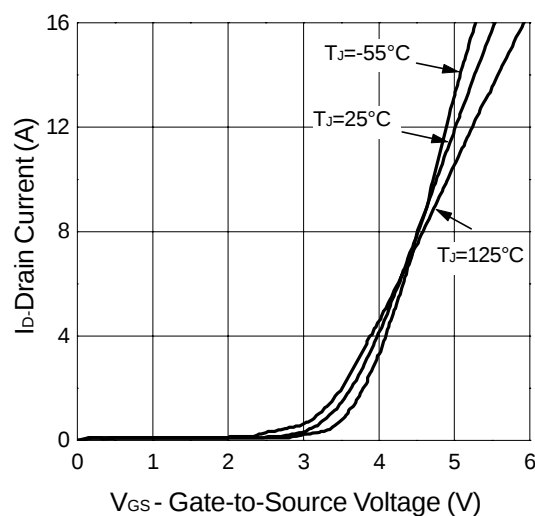

Threshold Voltage vs. Temperature

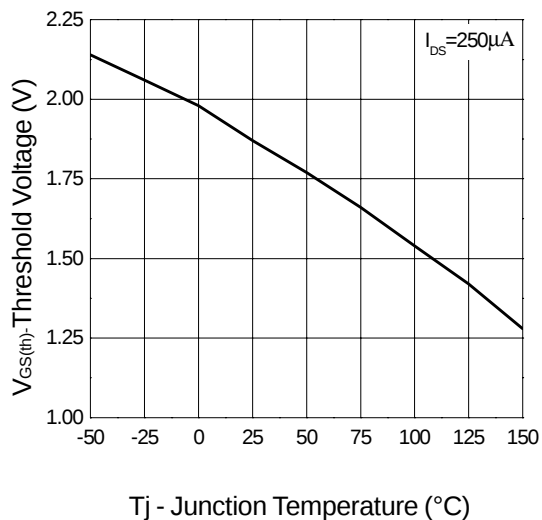


On-Resistance vs. Drain Current

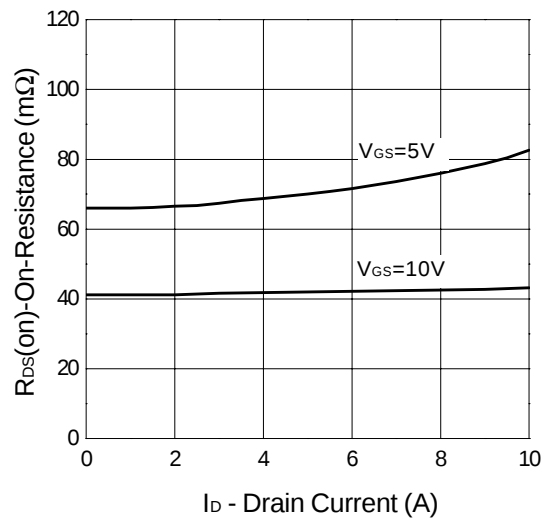


Typical Characteristics


On-Resistance vs. Gate-to-Source Voltage

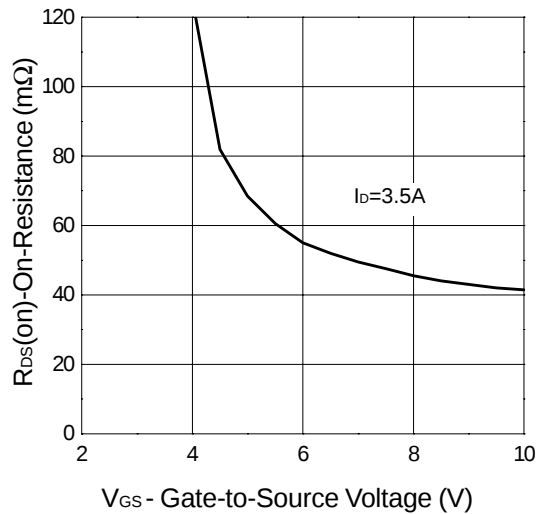


On-Resistance vs. Junction Temperature

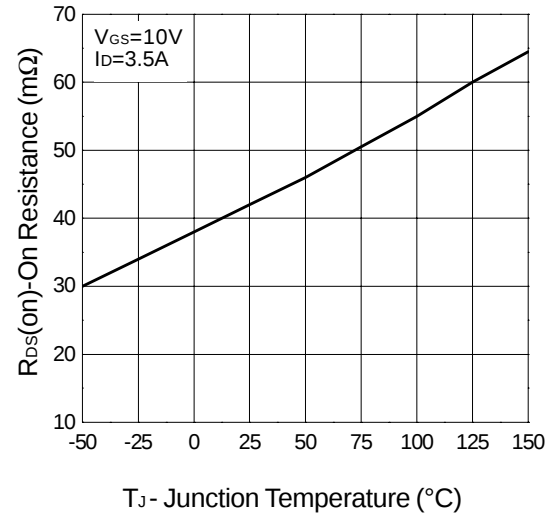




Gate Charge

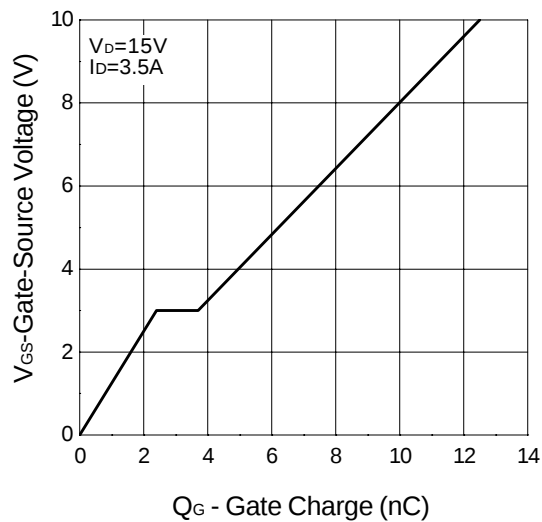

Capacitance

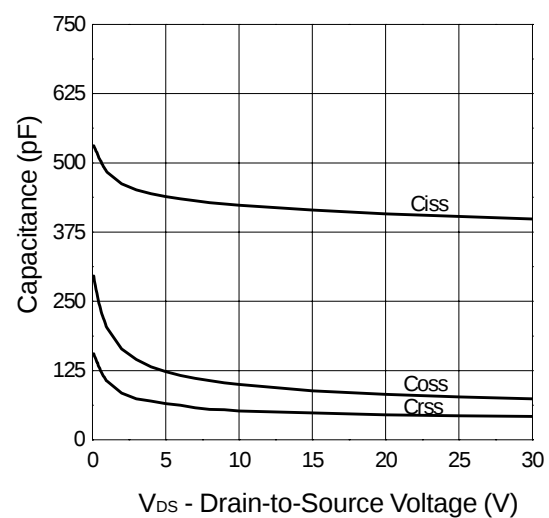


Typical Characteristics

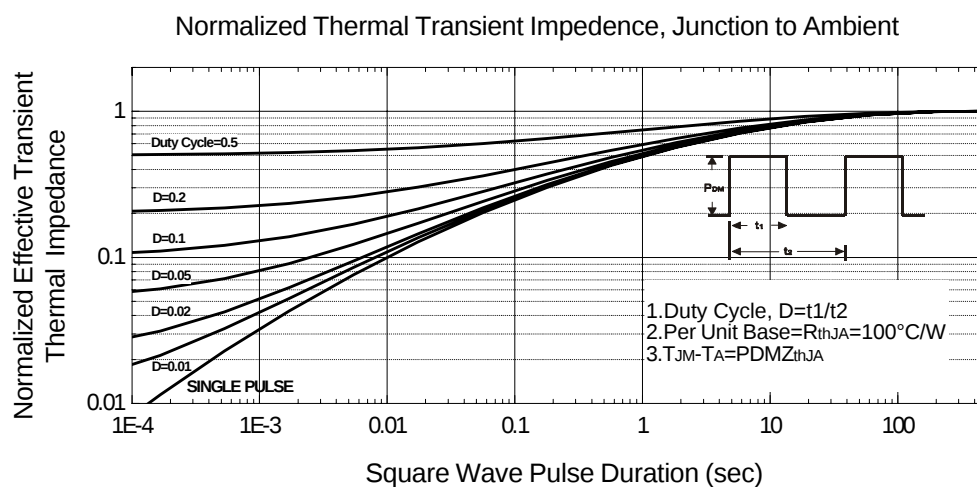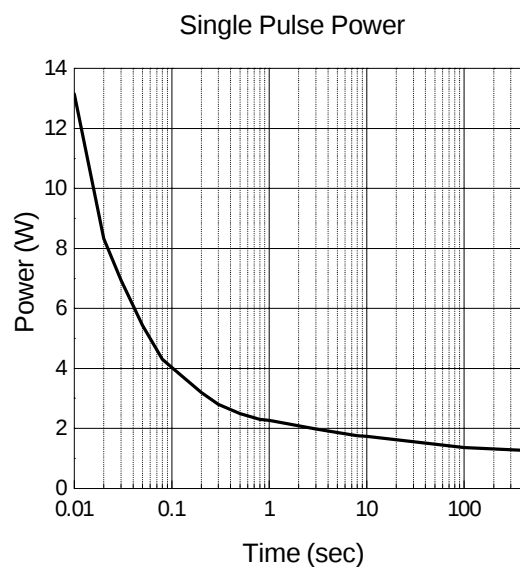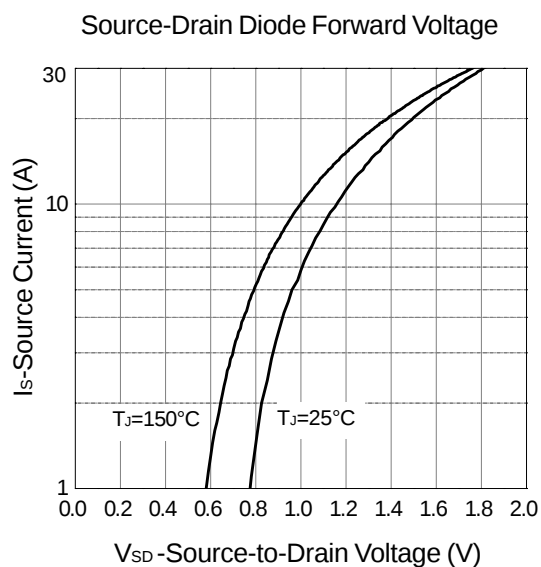

Packaging Information

SOT-23

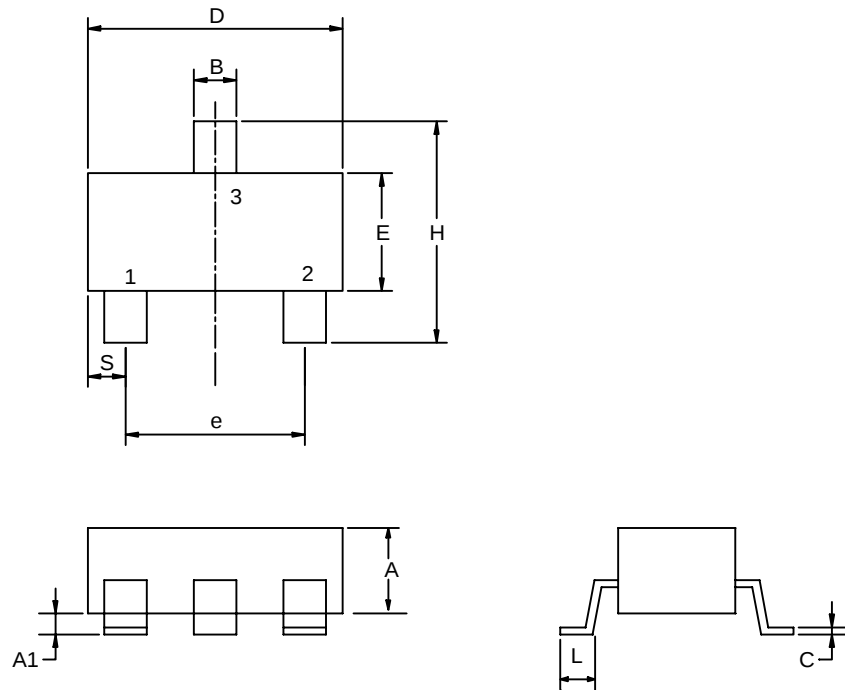


Dim	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.00	1.30	0.039	0.051
A1	0.00	0.10	0.000	0.004
B	0.35	0.51	0.014	0.020
C	0.10	0.25	0.004	0.010
D	2.70	3.10	0.106	0.122
E	1.40	1.80	0.055	0.071
e	1.90 BSC		0.075 BSC	
H	2.40	3.00	0.094	0.118
L	0.37		0.0015	

Physical Specifications

Terminal Material	Solder-Plated Copper (Solder Material : 90/10 or 63/37 SnPb)
Lead Solderability	Meets EIA Specification RSI86-91, ANSI/J-STD-002 Category 3.

Reflow Condition (IR/Convection or VPR Reflow)

Reference JEDEC Standard J-STD-020A APRIL 1999

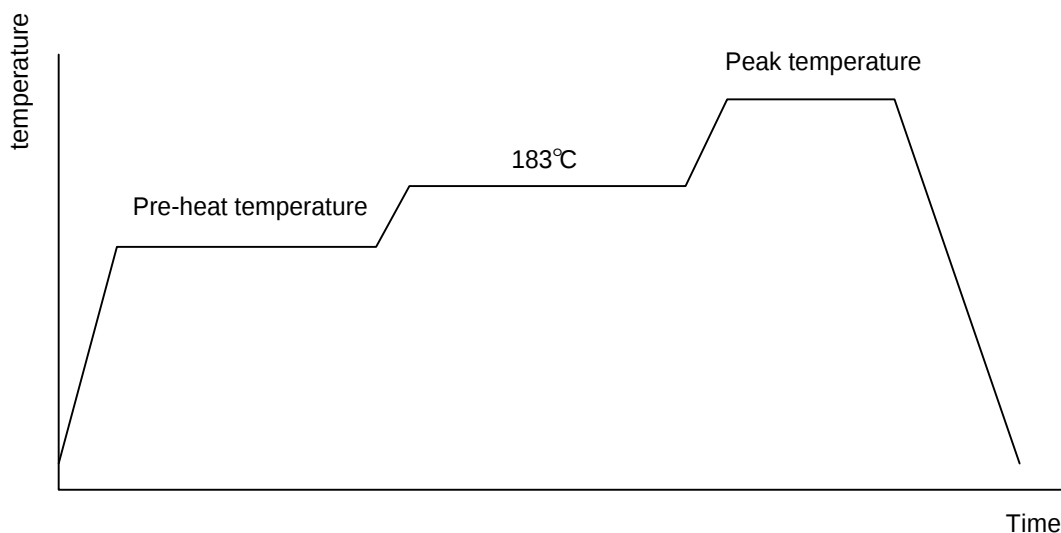

Classification Reflow Profiles

	Convection or IR/ Convection	VPR
Average ramp-up rate(183°C to Peak)	3°C/second max.	10 °C /second max.
Preheat temperature 125 ± 25°C)	120 seconds max	
Temperature maintained above 183°C	60 – 150 seconds	
Time within 5°C of actual peak temperature	10 – 20 seconds	60 seconds
Peak temperature range	220 +5/-0°C or 235 +5/-0°C	215-219°C or 235 +5/-0°C
Ramp-down rate	6 °C /second max.	10 °C /second max.
Time 25°C to peak temperature	6 minutes max.	


Package Reflow Conditions

pkg. thickness ≥ 2.5mm and all bgas	pkg. thickness < 2.5mm and pkg. volume ≥ 350 mm ³	pkg. thickness < 2.5mm and pkg. volume < 350mm ³
Convection 220 +5/-0 °C		Convection 235 +5/-0 °C
VPR 215-219 °C		VPR 235 +5/-0 °C
IR/Convection 220 +5/-0 °C		IR/Convection 235 +5/-0 °C

Reliability test program

Test item	Method	Description
SOLDERABILITY	MIL-STD-883D-2003	245°C, 5 SEC
HOLT	MIL-STD 883D-1005.7	1000 Hrs Bias @ 125°C
PCT	JESD-22-B, A102	168 Hrs, 100% RH, 121°C
TST	MIL-STD 883D-1011.9	-65°C ~ 150°C, 200 Cycles

Carrier Tape

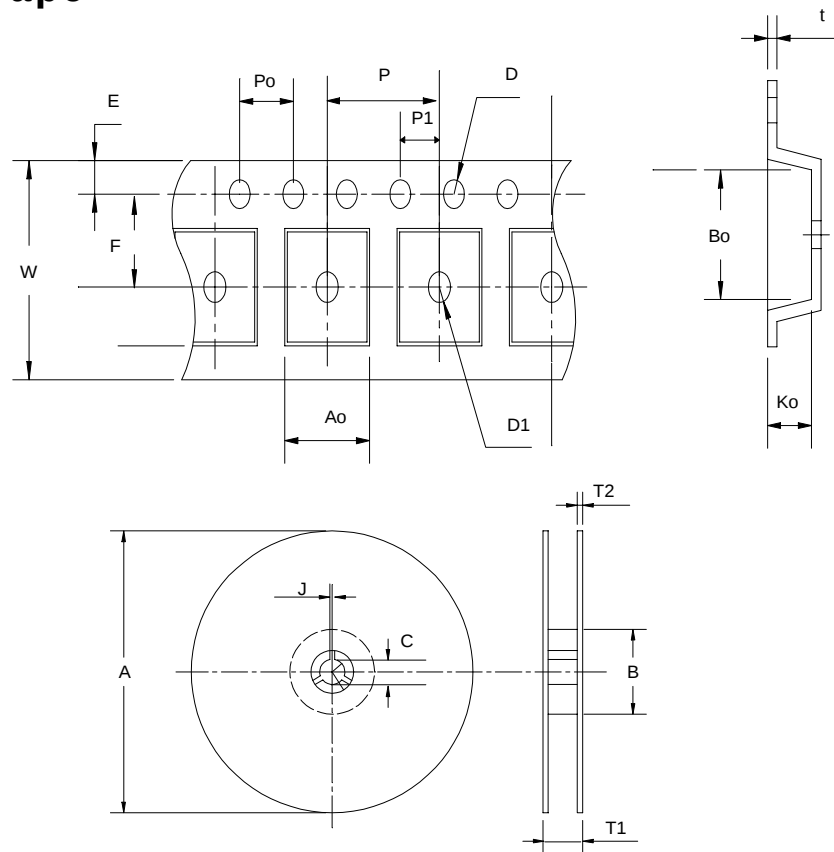

Application	A	B	C	J	T1	T2	W	P	E
SOT-23	178±1	72 ± 1.0	13.0 + 0.2	2.5 ± 0.15	8.4 ± 2	1.5 ± 0.3	8.0 ^{+ 0.3} _{- 0.3}	4 ± 0.1	1.75 ± 0.1
	F	D	D1	P ₀	P1	A ₀	B ₀	K ₀	t
	3.5 ± 0.05	1.5 + 0.1	1.5 + 0.1	4.0 ± 0.1	2.0 ± 0.1	3.15 ± 0.1	3.2 ± 0.1	1.4 ± 0.1	0.2 ± 0.03

Cover Tape Dimensions

Application	Carrier Width	Cover Tape Width	Devices Per Reel
SOT- 23	8	5.3	3000

Customer Service

Anpec Electronics Corp.

Head Office :

5F, No. 2 Li-Hsin Road, SBIP,

Hsin-Chu, Taiwan, R.O.C.

Tel : 886-3-5642000

Fax : 886-3-5642050

Taipei Branch :

7F, No. 137, Lane 235, Pac Chiao Rd.,

Hsin Tien City, Taipei Hsien, Taiwan, R. O. C.

Tel : 886-2-89191368

Fax : 886-2-89191369