

isc Silicon NPN RF Transistor
BFR93A
DESCRIPTION


- High Power Gain
- High Current Gain Bandwidth Product
- Low Noise Figure
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Designed for use in RF wideband amplifiers and oscillators.

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CBO}	Collector-Base Voltage	20	V
V _{CES}	Collector-Emitter Voltage	20	V
V _{CEO}	Collector-Emitter Voltage	12	V
V _{EBO}	Emitter-Base Voltage	2	V
I _C	Collector Current-Continuous	50	mA
I _B	Base Current-Continuous	6	mA
P _C	Collector Power Dissipation @T _c =25°C	0.3	W
T _J	Junction Temperature	150	°C
T _{stg}	Storage Temperature Range	-65~150	°C

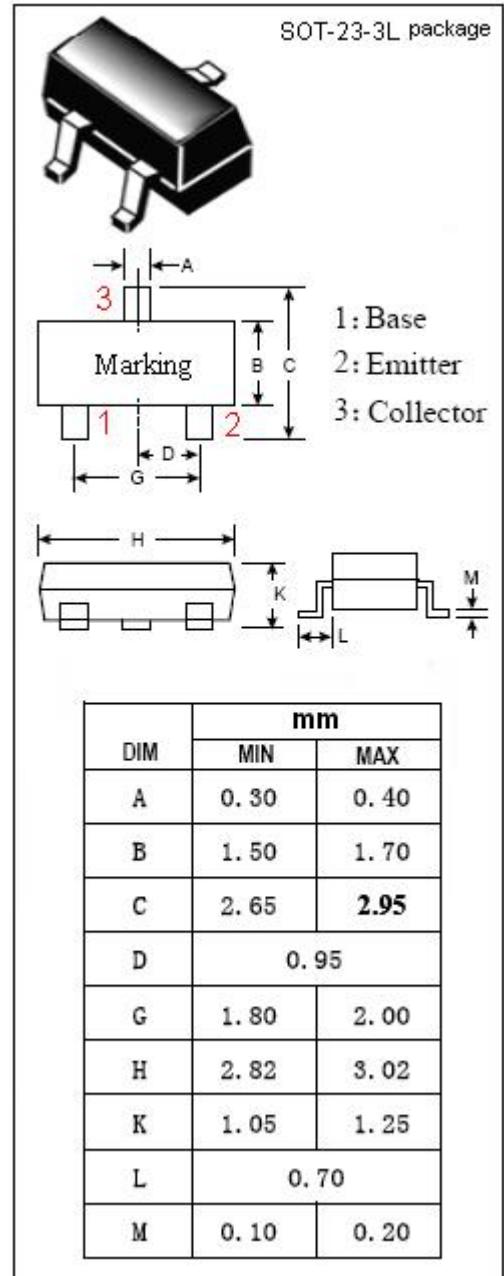

ELECTRICAL CHARACTERISTICS

 T_c=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = 1mA ; I _B = 0	12			V
I _{CES}	Collector Cutoff Current	V _{CE} = 20V; V _{BE} = 0			100	μ A
I _{CBO}	Collector Cutoff Current	V _{CB} = 10V; I _E = 0			100	nA
I _{EBO}	Emitter Cutoff Current	V _{EB} = 2V; I _C = 0			10	μ A
h _{FE}	DC Current Gain	I _C = 30mA ; V _{CE} = 8V	50		200	
f _T	Current-Gain—Bandwidth Product	I _C = 30mA ; V _{CE} = 8V; f= 500MHz	4.5	6		GHz
C _{OB}	Output Capacitance	I _E = 0 ; V _{CB} = 10V; f= 1MHz		0.58	0.9	pF
NF	Noise Figure	I _C = 5mA ; V _{CE} = 8V; f= 900MHz		2		dB
NF	Noise Figure	I _C = 5mA ; V _{CE} = 8V; f= 1.8GHz		3.3		dB
PG	Power Gain	I _C = 30mA ; V _{CE} = 8V; f= 900MHz		13.5		dB
PG	Power Gain	I _C = 30mA ; V _{CE} = 8V; f= 1.8GHz		8.5		dB
S _{21e} ²	Insertion Power Gain	I _C = 30mA ; V _{CE} = 8V; f= 900MHz		12		dB
S _{21e} ²	Insertion Power Gain	I _C = 30mA ; V _{CE} = 8V; f= 1.8GHz		6.5		dB

**NOTICE:**

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.