



CAPA112

AMD G-Series APU 3.5" Embedded SBC with AMD A55E FCH, LVDS/VGA, Dual LANs and Audio

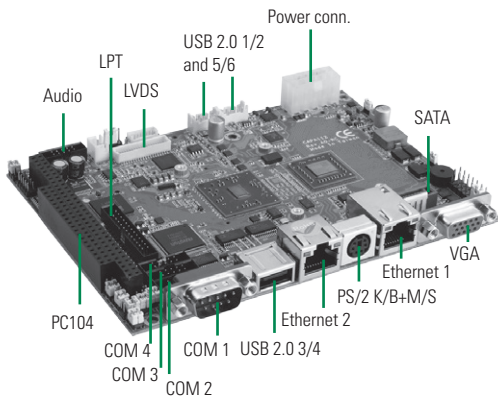

System


CPU	AMD G-Series APU T16R 615 MHz single core/ T40E 1.0 GHz dual core onboard
System Memory	1 x 204-pin SO-DIMM supports DDR3-1066 max. up to 4 GB
Chipset	AMD FCH A55E
BIOS	AMI UEFI BIOS
SSD	1 x CFast™
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x PCI Express Mini Card w/mSATA support 1 x PC/104 for 16bit ISA bus
Battery	Lithium 3V/220mAH
Power Input	2 x 5-pin connector ATX standard power source DC+5V only (+12V is required for +12V powered COM and LVDS inverter) AT Auto Power ON function supported
Power Requirement	AMD G-Series APU T40E @ 1.0GHz, 1GB DDR3 Max. RMS: +5VSB @ 4mA, +5V @ 3.92A, +12V @ 40mA
Size	146 x 104 mm
Board Thickness	1.6 mm
Operating Temperature	-40°C ~ +70°C (-40°F ~ 158°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x RS-232/422/485 (COM 1); with +5V/+12V powered 3 x RS-232 (COM 2/3/4); with +5V/+12V powered 1 x PS/2 keyboard and mouse 1 x LPT; with SPP/EPP/ECP supported
SATA	1 x SATA-600
Hardware Monitoring	Detect CPU/system temperature and voltage
Ethernet	2 port 10/100/1000 Mbps supports Wake-on-LAN, RPL/PXE Boot ROM with Realtek RTL8111E
Audio	HD Codec audio as MIC-in/Line-in/Line-out with Realtek ALC662
USB	6 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	8 channels IN/OUT programmed

Features

- AMD G-Series APU T16R (615 MHz)/ T40E (1.0 GHz)
- AMD A55E FCH
- 1 DDR3 SO-DIMM supports up to 4 GB memory capacity
- 6 USB 2.0 ports
- 4 COM ports

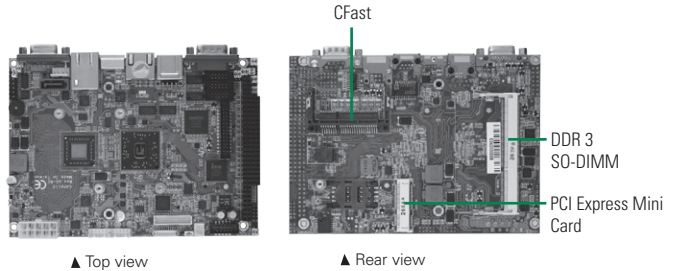

▲ Top view

▲ Rear view

Display

Chipset	AMD G-Series APU integrated graphic engine – Radeon™ HD6250
Memory Size	Max. up to 2 GB in 4 GB DDR3 module
Display Interface	1 x VGA 1 x LVDS; 18/24-bit single/dual channel

Packing List

Standard

Quick installation guide, user's manual/utility CD and cable

Cable

Part Number	Description	Qty
59382620000E	1 x COM w/bracket P=2.0mm, L=300mm	1
59384500100E	Audio cable w/bracket P=2,450mm	1
59382631000E	2 x USB 2.0 wafer cable w/bracket	1
59402010000E	ATX power cable 10P L=150mm	1

Ordering Information

Standard

CAPA112VGGGA-T16R (P/N: E38E112101)	3.5" SBC with AMD G-Series APU T16R 615 MHz and FCH A55E chipset, VGA/LVDS, 2 10/100/1000Mbps Ethernet and audio
CAPA112VGGGA-T40E (P/N:E38E112100)	3.5" SBC with AMD G-Series APU T40E 1.0 GHz and FCH A55E chipset VGA/LVDS, 2 10/100/1000Mbps Ethernet and audio

SBC Services and Solutions

Systems on Modules

Embedded SBCs >EPIC

Embedded SBCs >3.5" Capa

Embedded SBCs >Nano-ITX

Embedded SBCs >PC-ITX

Embedded SBCs >PC/104

Industrial Motherboards

Slot CPU Cards

Accessories

Appendix