


TO-92 Encapsulate Three-terminal voltage regulators

CJ79L12 Three-terminal negative voltage regulator

FEATURES

- Maximum output current
 I_{OM} : 0.1 A
- Output voltage
 V_O : -12 V
- Continuous total dissipation
 P_D : 0.625 W

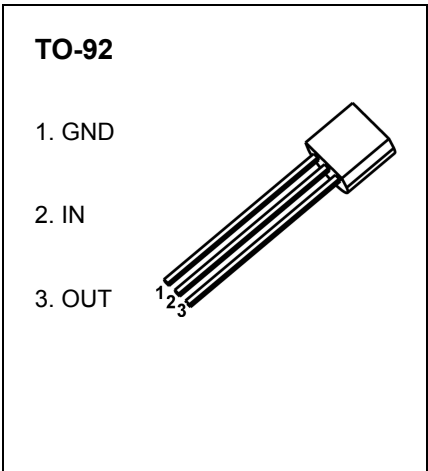


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_I	-35	V
Operating Junction Temperature Range	T_{OPR}	0~+150	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_I=19V, I_O=40mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	V_O	25°C	-11.5	-12	-12.5	V
		-14.5V≤ V_I ≤-27V, $I_O=1mA\sim40mA$	-11.4	-12	-12.6	V
		$I_O=1mA\sim70mA$	-11.4	-12	-12.6	V
Load Regulation	ΔV_O	$I_O=1mA\sim100mA$	25°C	24	100	mV
		$I_O=1mA\sim40mA$	25°C	15	50	mV
Line Regulation	ΔV_O	-14.5V≤ V_I ≤-27V	25°C	50	250	mV
		-16V≤ V_I ≤-27V	25°C	40	200	mV
Quiescent Current	I_q	25°C			6.5	mA
Quiescent Current Change	ΔI_q	-16V≤ V_I ≤-27V	0-125°C		1.5	mA
	ΔI_q	1mA≤ I_O ≤40mA	0-125°C		0.1	mA
Output Noise Voltage	V_N	10Hz≤f≤100KHz	25°C	80		μV
Ripple Rejection	RR	-15V≤ V_I ≤-25V, f=120Hz	0-125°C	37	42	dB
Dropout Voltage	V_d	25°C		1.7		V

TYPICAL APPLICATION

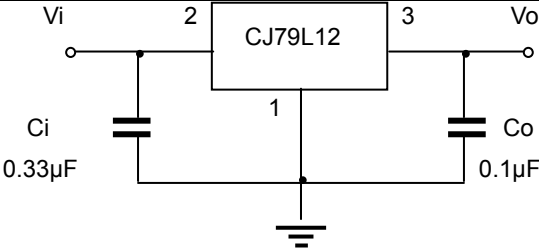

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.