


SILICON PLANAR EPITAXIAL TRANSISTORS

CLB764 PNP

CLD863 NPN

TO-92

Plastic Package



Voltage Regulator, Relay Lamp Driver Electrical Equipment Applications

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)


DESCRIPTION	SYMBOL	VALUE	UNITS
Collector Base Voltage	V_{CBO}	60	V
Collector Emitter Voltage	V_{CEO}	50	V
Emitter Base Voltage	V_{EBO}	5.0	V
Collector Current	I_C	1.0	A
Peak Collector Current	I_{CP}	2.0	A
Collector Power Dissipation	P_C	0.9	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	- 55 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
Collector Base Voltage	V_{CBO}	$I_C=10\mu\text{A}$, $I_E=0$	60		V
Collector Emitter Voltage	V_{CEO}	$I_C=1\text{mA}$, $I_B=0$	50		V
Emitter Base Voltage	V_{EBO}	$I_E=10\mu\text{A}$, $I_C=0$	5.0		V
Collector Cut Off Current	I_{CBO}	$V_{CB}=50\text{V}$, $I_E=0$		1.0	μA
Emitter Cut Off Current	I_{EBO}	$V_{EB}=4\text{V}$, $I_C=0$		1.0	μA
DC Current Gain	h_{FE}	$I_C=50\text{mA}$, $V_{CE}=2\text{V}$	60	320	
	h_{FE}	$I_C=1\text{A}$, $V_{CE}=2\text{V}$	30		
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=500\text{mA}$, $I_B=50\text{mA}$		0.5 0.7	V
		NPN			
		PNP			
Base Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=500\text{mA}$, $I_B=50\text{mA}$		1.2	V

SILICON PLANAR EPITAXIAL TRANSISTORS

CLB764 PNP
CLD863 NPN



TO-92
Plastic Package

DYNAMIC CHARACTERISTICS

Transition Frequency	f_T	$V_{CE}=10V, I_C=50mA$	TYP150	MHz
Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$ NPN PNP	TYP12 TYP20	pF pF




CLASSIFICATION	D	E	F
*h_{FE}	60 - 120	100 - 200	160 - 320

CLB764_CLD863 Rev111209E

CLB764 PNP
CLD863 NPN

TO-92
Plastic Package

TO-92 Leaded Plastic Package

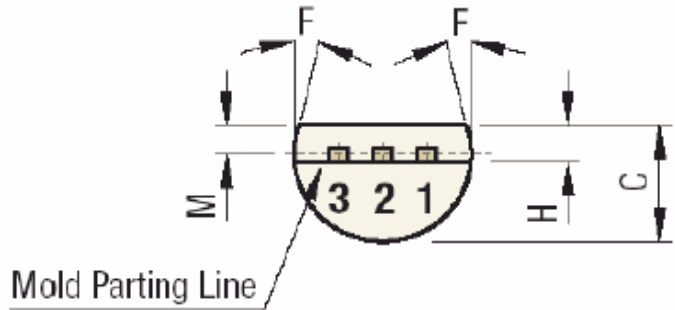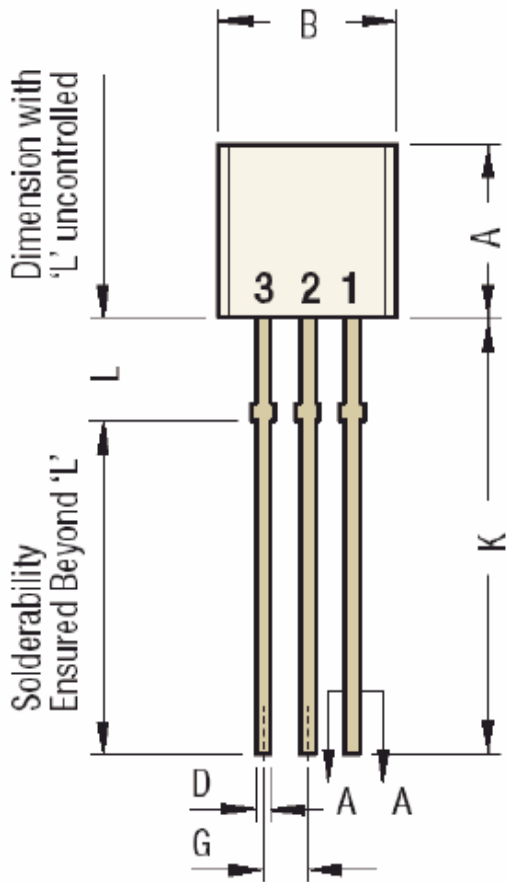


DIM	Min	Max
A	4.32	5.33
B	4.45	5.20
C	3.18	4.19
D	0.41	0.55
E	0.35	0.55
F	5°	



All Dimensions are in mm

DIM	Min	Max
G	1.14	1.40
H	1.20	1.80
K	12.5	
L	1.982	2.082
M	1.03	1.53

Pin 1 Base
Pin 2 Collector
Pin 3 Emitter

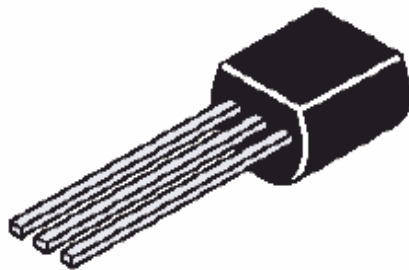

TO-92 Tape and Ammo Packaging

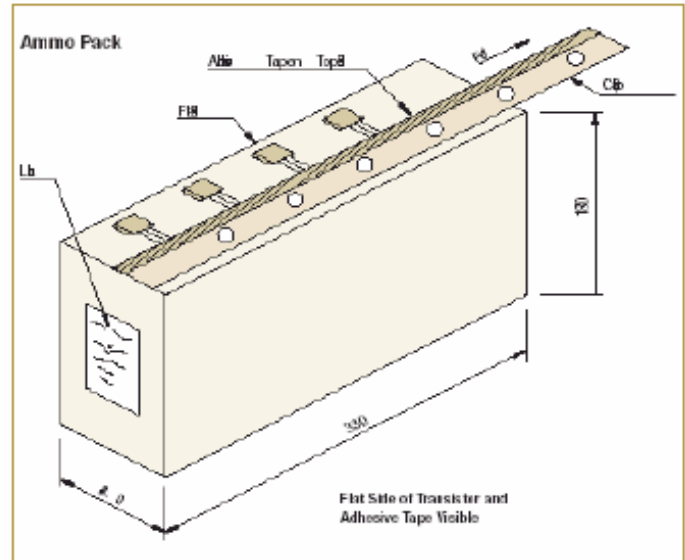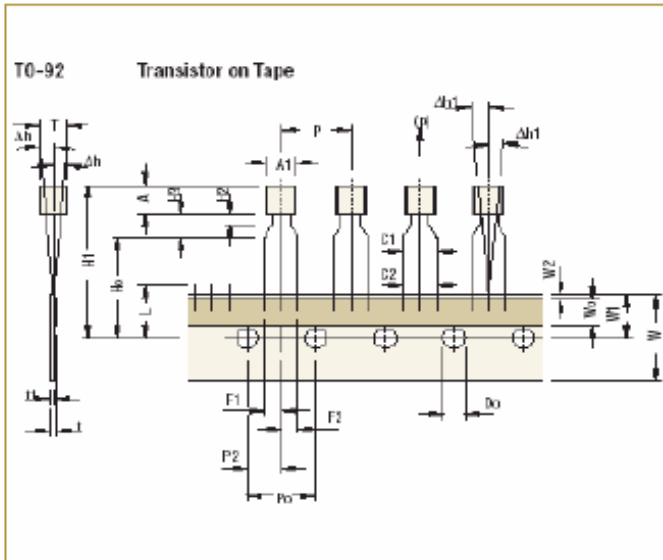

All Dimensions are in mm

Tape Specifications

Item description	Symbol	TO-92			
		Min	Nom	Max	Tol
Body width	A1	4.45		5.20	
Body height	A	4.32		5.33	
Body thickness	T	3.18		4.19	
Pitch of component ^{§1}	P		12.7		±1.0
Feed hole pitch ^{§1}	Po		12.7		±0.3
Feed hole center to component centre ^{§2}	P2		6.35		±0.4
Comp. alignment, Side view ^{§3}	Dh		0	1.0	
Comp. alignment, Front view ^{§3}	Dh1		0	1.3	
Tape width ^{Cr}	W		18		±0.5
Hold down tape width ^{Cr}	W0		6		±0.2
Hole position	W1		9		+0.7 -0.5
Hold-down tape position	W2	0.0		0.7	
Lead wire clinch height	Ho		16		±0.5
Component height	H1			24.0	
Length of snapped leads	L			11.0	
Feed hole diameter ^{Cr}	Do		4		±0.2
Total tape thickness ^{§4}	t			1.2	
Lead-to-lead distance ^{Cr}	F1, F2	2.4		2.7	
Stand off	H2	0.45		1.45	
Clinch height	H3			3.0	
Lead parallelism ^{Cr}	C1-C2			0.22	
Pull-out force	(p)	6N			

Taping Specification

- Maximum alignment deviation between leads not to be greater than 0.20 mm.
- Maximum non-cumulative variation between tape feed holes shall not exceed 1 mm in 20 pitches.
- Hold down tape not to exceed beyond the edge(s) carrier tape and there shall be no exposure of adhesive.
- No more than 3 consecutive missing components is permitted.
- A tape trailer, having at least three feed holes is required after the last component.
- Splices shall not interfere with the sprocket feed holes.

§1 Cumulative pitch error 1.0 mm/20 pitch.

§2 To be measured at bottom of clinch.

§3 At top of body.

§4 t1 = 0.3 – 0.6 mm

Cr Critical Dimension.

All Dimensions are in mm

Packaging Information

T & A: Tape and Ammo Pack; T & R: Tape and Red; Bulk: Loose in Poly bags; Tube: Tube and Ammo Pack; k: 1.000

Package/Case Type	Packaging Type	Std. Packing		Inner Carton		Outer Carton		
		Qty	Qty	Size L x W x H	Gross Weight	Qty	Size L x W x H	Gross Weight
				(cm)	(Kg)		(cm)	(Kg)
TO-92	Bulk	1,000	5K	19x19x8	1.10	80K	43x40x35	20.0
	T&A	2,000	2K	32x4.5x20	0.70	40K	43x40x35	15.20

Component Disposal Instructions

1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119

email@cdil.com, www.cdilsemi.com