

General Description:

Using micro trench design and advanced Field Stop (FS) technology, offering superior conduction and switching performances.

RoHS Compliant.

V_{CES}	650	V
I_C	100	A
P_{tot} (T_C=25°C)	540	W
V_{CE(sat)}	1.55	V

Features:


- FS Trench Technology, Positive temperature coefficient

- Low saturation voltage:

V_{CE(sat)},TYP=1.55V @I_C=100A,V_{GE}=15V;

- Low switching loss


Package:TO-247



Applications

- Motor Control
- Solar converts
- Charger

Equivalent circuit:



Package Parameters

Type	Package	Marking	Packing
CRG100T65RK5SDZ	TO-247	G100T65RK5SDZ	Tube

Absolute Maximum Ratings (T_C= 25°C unless otherwise specified):

Symbol	Parameter	Rating	Units
V _{CES}	Collector-Emitter Voltage	650	V
V _{GES}	Gate- Emitter Voltage	±20	V
	Gate- Emitter Voltage (tp≤10us,D<0.01)	±30	
I _C ^{a1}	Collector Current @T _C = 25 °C	120	A
	Collector Current @T _C = 100 °C	100	
I _{CM}	Pulsed Collector Current @T _C =25°C	300	A
I _F ^{a2}	Diode Continuous Forward Current @T _C = 25 °C	120	A
	Diode Continuous Forward Current @T _C = 100 °C	100	
I _{FM}	Diode Maximum Forward Current	300	A
T _{sc}	Short Circuit Withstand Time @V _{GE} =15V,V _{CE} =400V	6	μs
P _D	Power Dissipation @ T _C = 25 °C	540	W
	Power Dissipation @T _C = 100 °C	270	
T _j ^{a3}	Operating Junction temperature range	-40~175	°C
T _{sig}	Storage Temperature Range	-55~150	°C
T _L	Maximum Temperature for Soldering	270	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Units
R _{θJC}	Thermal Resistance, Junction to case for IGBT	--	0.28	°C/W
R _{θJC}	Thermal Resistance, Junction to case for Diode	--	0.52	°C/W
R _{θJA}	Thermal Resistance, Junction to Ambient	--	40	°C/W

Electrical Characteristics of the IGBT (T_C= 25°C unless otherwise specified):

Symbol	Parameter	Test Conditions	SPEC			Units
			Min.	Typ.	Max.	
OFF Characteristics						
V _{(BR)CES}	Collector-Emitter Breakdown Voltage	V _{GE} =0V,I _{CE} =250uA	650	--	--	V
I _{CES}	Collector-Emitter Leakage Current	V _{GE} =0V,V _{CE} =650V	--	--	1.0	mA
I _{GES(F)}	Gate to Emitter Forward Leakage	V _{GE} =+20V	--	--	+250	nA
I _{GES(R)}	Gate to Source Reverse Leakage	V _{GE} =-20V	--	--	-250	nA
ON Characteristics						
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C =100A ,V _{GE} =15V, T _c =25°C	--	1.55	2.0	V
		I _C =100A ,V _{GE} =15V, T _c =150°C	--	2.0	--	V
V _{GE(th)}	Gate Threshold Voltage	I _C =250uA ,V _{CE} =V _{GE}	4		7	V

Pulse width $t_p \leq 300\mu s, \delta \leq 2\%$
Dynamic Characteristics

C_{ies}	Input Capacitance	$V_{CE}=30V, V_{GE}=0V$ $f=1MHz$	--	7565	--	pF
C_{oes}	Output Capacitance		--	303	--	
C_{res}	Reverse Transfer Capacitance		--	41	--	

Switching Characteristics

$t_{d(on)}$	Turn-on Delay Time	$V_{CE}=400V, I_C=100A, R_g=10\Omega, V_{GE}=15V, Inductive Load, T_j=25^\circ C$	--	69	--	ns
t_r	Rise Time		--	115	--	
$t_{d(off)}$	Turn-Off Delay Time		--	142	--	
t_f	Fall Time		--	58	--	
E_{on}^{a4}	Turn-On Switching Loss		--	5.24	--	
E_{off}	Turn-Off Switching Loss		--	1.92	--	
E_{ts}	Total Switching Loss		--	7.16	--	
$t_{d(on)}$	Turn-on Delay Time		--	63	--	
t_r	Rise Time	$V_{CE}=400V, I_C=100A, R_g=10\Omega, V_{GE}=15V, Inductive Load, T_j=150^\circ C$	--	121	--	ns
$t_{d(off)}$	Turn-Off Delay Time		--	164	--	
t_f	Fall Time		--	95	--	
E_{on}^{a4}	Turn-On Switching Loss		--	5.54	--	
E_{off}	Turn-Off Switching Loss		--	2.61	--	
E_{ts}	Total Switching Loss		--	8.15	--	
Q_g	Total Gate Charge	$V_{CE}=520V, I_C=100A, V_{GE}=15V$	--	236	--	nC
Q_{ge}	Gate to Emitter Charge		--	99	--	
Q_{gc}	Gate to Collector Charge		--	77	--	

Electrical Characteristics of the DIODE ($T_C = 25^\circ C$ unless otherwise specified):

V_F	Diode Forward Voltage	$I_F=100A, T_C=25^\circ C$	--	1.70	2.2	V
		$I_F=100A, T_C=150^\circ C$	--	1.60	--	V
T_{rr}	Reverse Recovery Time	$I_F=100A$ $di/dt=200A/\mu s$	--	92	--	ns
I_{rrm}	Reverse Recovery Current		--	7.3	--	A
Q_{rr}	Reverse Recovery Charge		--	339	--	nC

Notes:

- a1: The collector DC current is limited by the maximum junction temperature, limited by the bond wire current capacity at $25^\circ C$
a2: FRD DC forward current is limited by the maximum junction temperature, limited by the bond wire current capacity at $25^\circ C$
a3: Repetitive rating; pulse width limited by maximum junction temperature; Under overloading conditions, it is allowed to operate under the maximum junction temperature $T_{vjop}=175^\circ C$, and the maximum duty cycle is less than 20% (maximum lasting 60s)
a4: Turn-on losses include diode losses

Typical Performance Characteristics:

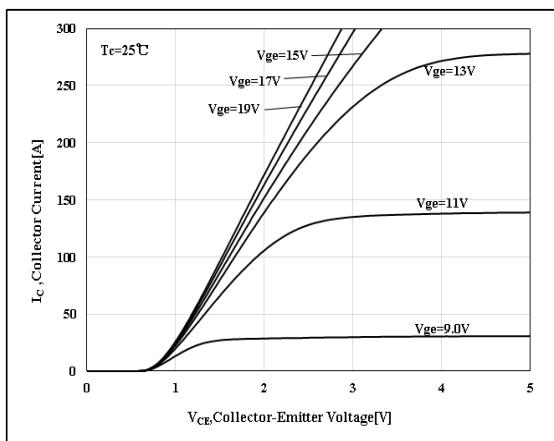


Figure 1.Output Characteristics

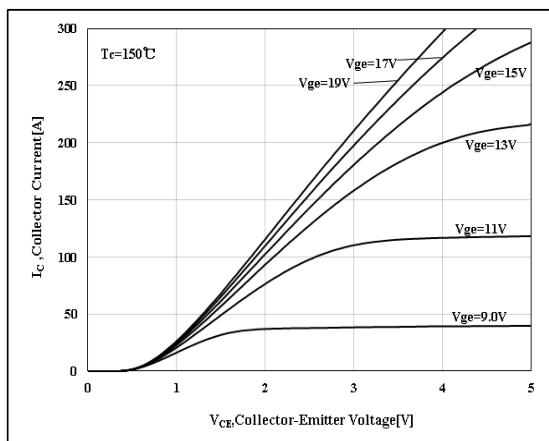


Figure 2.Output Characteristics

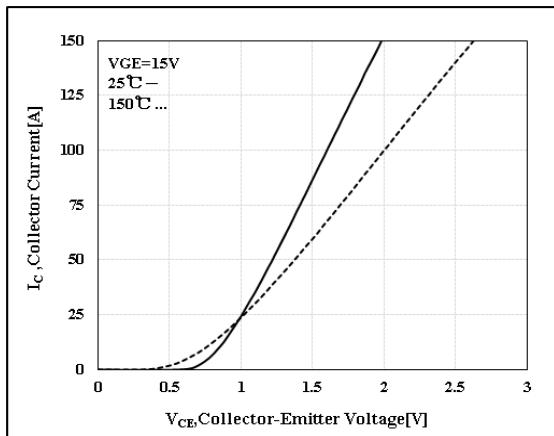


Figure 3.Saturation Voltage Characteristics

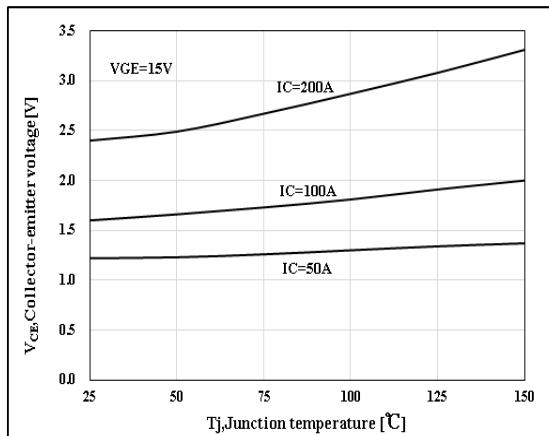


Figure 4.Saturation Voltage - T_c Characteristics

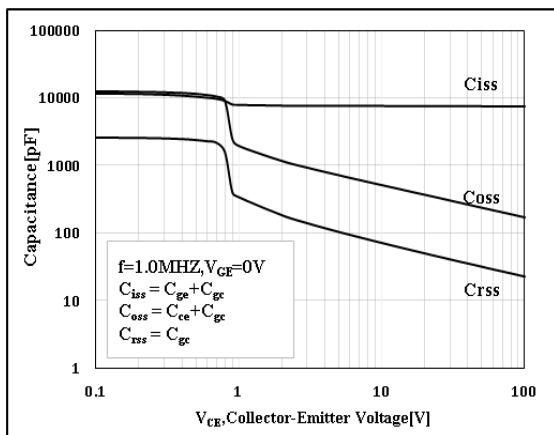


Figure 5.Capacitance Characteristics

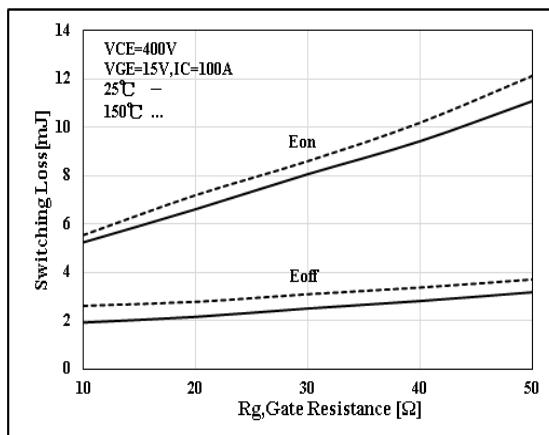


Figure 6.Switching Loss- R_g Characteristics

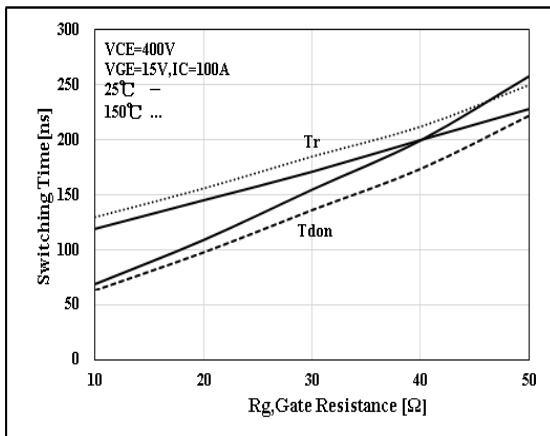


Figure 7.Switching Time-R_g Characteristics

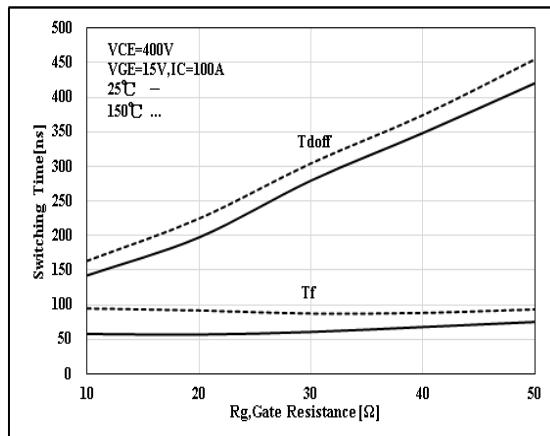


Figure 8.Switching Time-R_g Characteristics

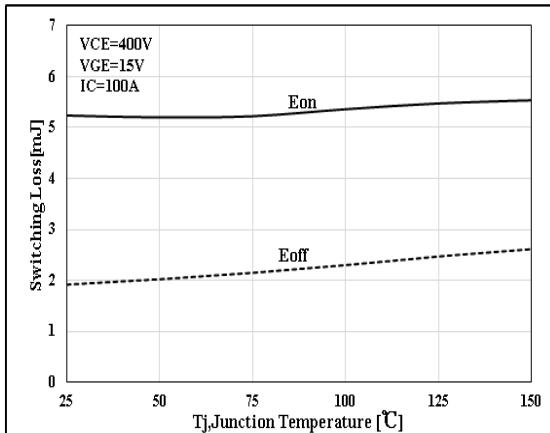


Figure 9.Switching Loss-T_j Characteristics

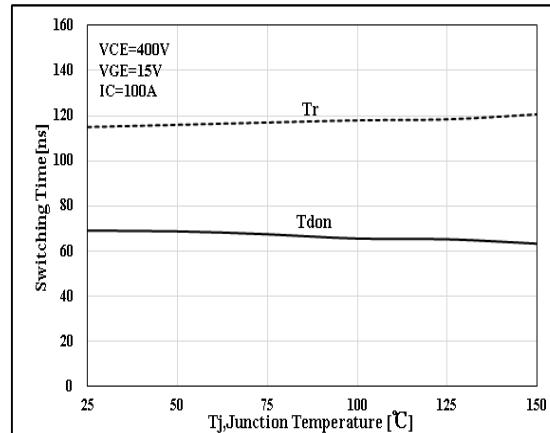


Figure 10.Switching Time-T_j Characteristics

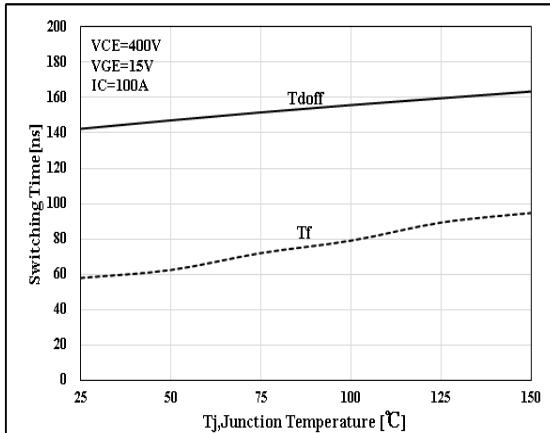


Figure 11.Switching Time-T_j Characteristics

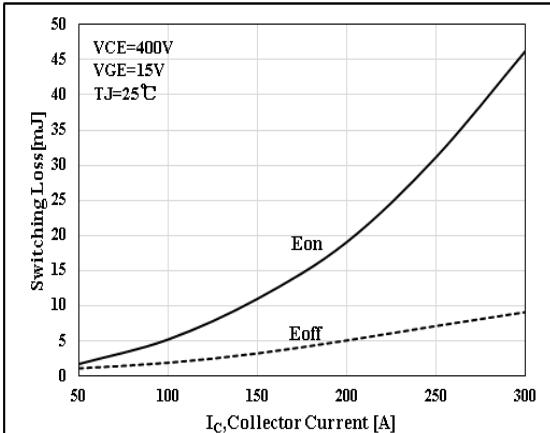


Figure 12.Switching Loss-I_c Characteristics

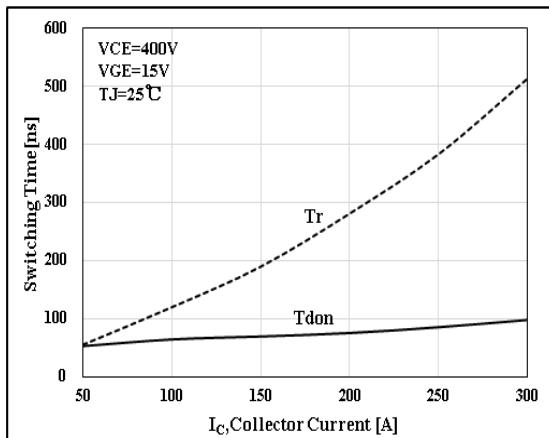


Figure 13.Switching Time-Ic Characteristics

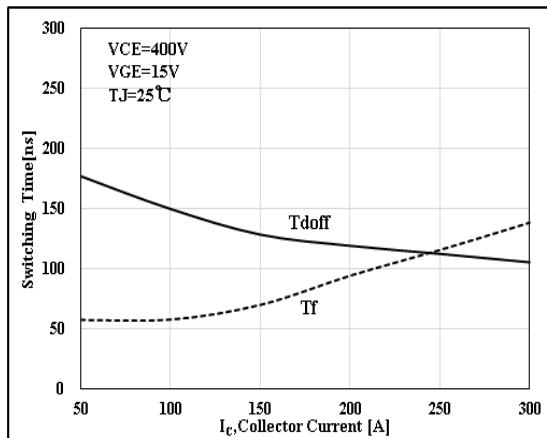


Figure 14.Switching Time-Ic Characteristics

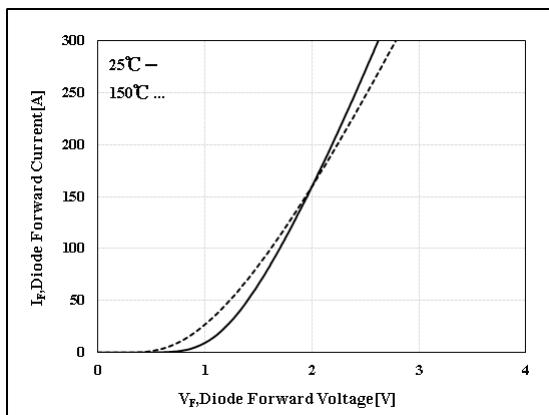


Figure 15.Diode Forward Characteristics

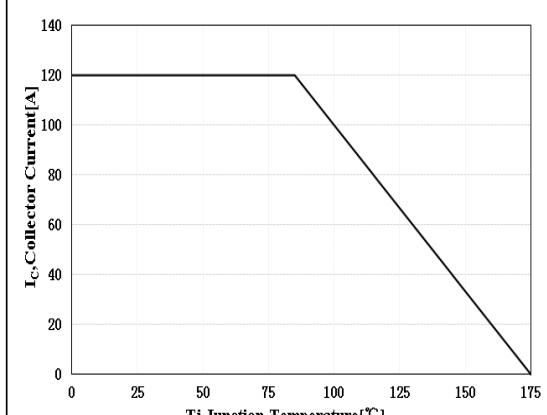


Figure 16.Collector Current-Tj Characteristics

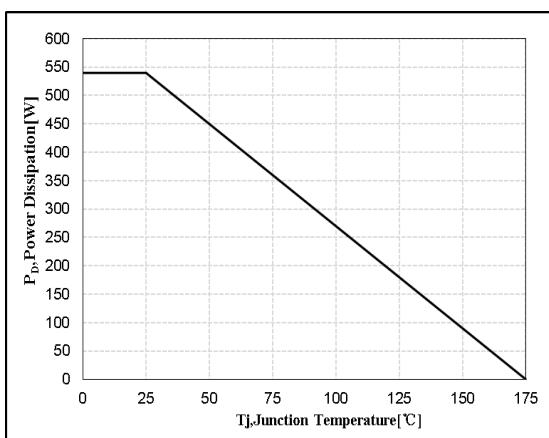


Figure 17.Power dissipation

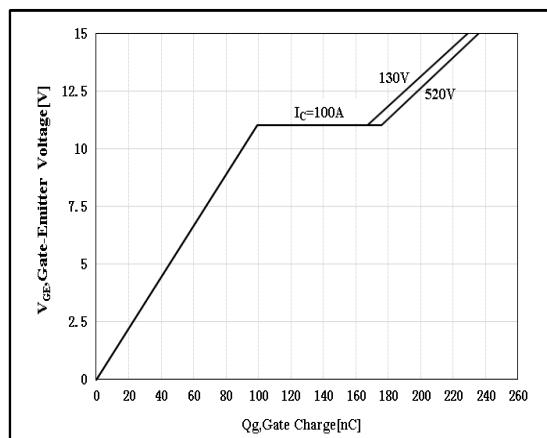


Figure 18.Gate Charge Characteristics

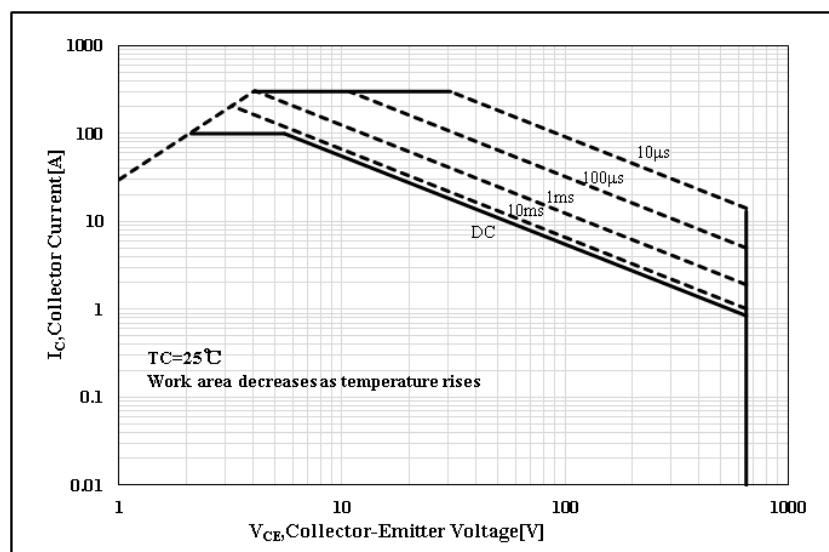


Figure 19. Forward Bias Safe Operating Area


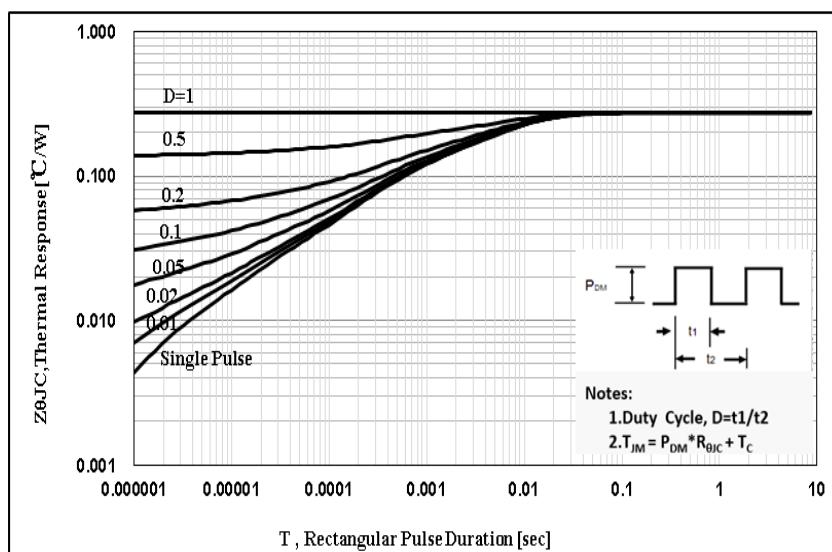


Figure 20. IGBT Transient Thermal Impedance

Package Information

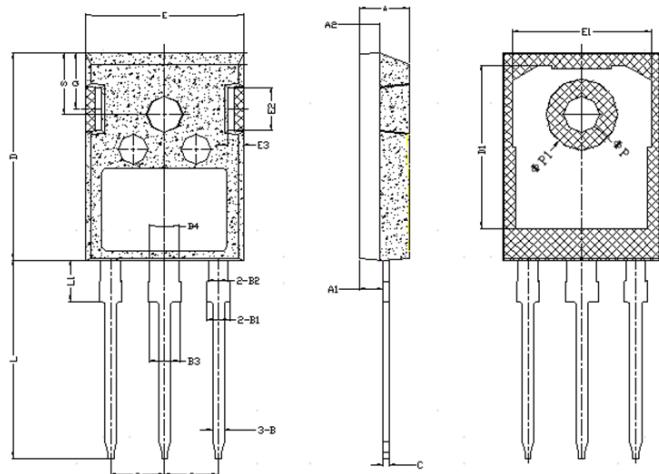

项 目	规范(mm)	
	MIN	MAX
A	4.6	5.2
A1	2.2	2.6
A2	1.85	2.17
B	0.9	1.4
B1	1.75	2.35
B2	1.75	2.15
B3	2.8	3.35
B4	2.8	3.15
C	0.5	0.7
D	20.60	21.30
D1	16	18
E	15.5	16.10
E1	13	14.7
E2	3.80	5.3
E3	0.8	2.60
e	5.2	5.7
L	19	20.5
L1	3.9	4.6
ΦP	3.3	3.70
ΦP1	7.0	7.4
Q	5.2	6.00
S	5.8	6.6

TO-247 Package

The name and content of poisonous and harmful material in products

Warnings

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. It is suggested to be used under 80 percent of the maximum ratings of the device.
 2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
 3. IGBTs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
 4. This publication is made by Huajing Microelectronics and subject to regular change without notice.

WUXI CHINA RESOURCES HUAJING MICROELECTRONICS CO., LTD.

Add: No.14 Liangxi RD. Wuxi, Jiangsu, China **Mail:** 214061 <https://www.crmicro.com>
Tel: 0510-85807228 **Fax:** 0510-85800864

Marketing Part: Post: 214061 Tel / Fax: 0510-85807228-3663/5508
0510-85800360 (Fax)

Application and Service: Post: 214061 Tel / Fax: 0510-85807228-3399 / 2227

Modify :

Version	Modify record
2025V01	Initial release