




PHASE NOISE (1 Hz BW, typical)

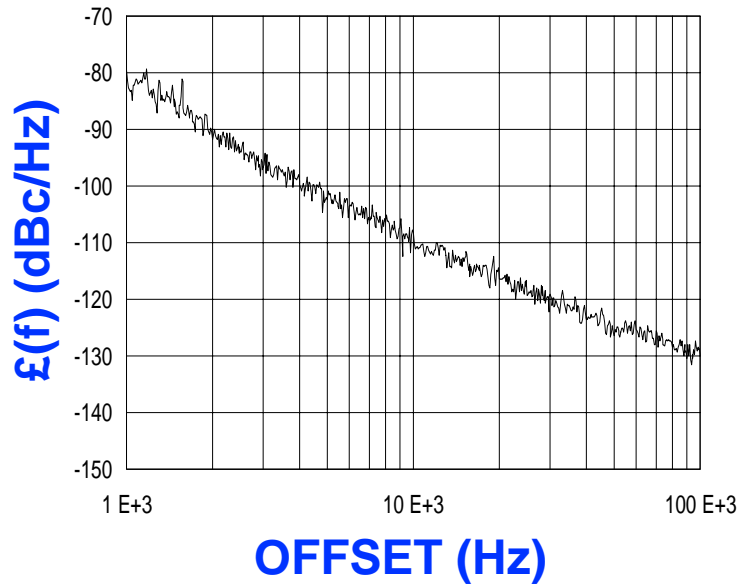


FEATURES
<ul style="list-style-type: none"> • Frequency Range: 2990 - 3250 MHz • Tuning Voltage: 0.5-18 Vdc • MINI-16 - Style Package
APPLICATIONS
<ul style="list-style-type: none"> • Point to Point Radio • Satellite Communications •

PERFORMANCE SPECIFICATIONS	VALUE	UNITS
Oscillation Frequency Range	2990 - 3250	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-107	dBc/Hz
Harmonic Suppression (2nd, typ.)	-10	dBc
Tuning Voltage	0.5-18	Vdc
Tuning Sensitivity (avg.)	22	MHz/V
Power Output	0±3	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	<1	MHz/V
Pulling (14dB Return Loss, Any Phase)	<1	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	MINI-16	
POWER SUPPLY REQUIREMENTS		
Supply Voltage (Vcc, nom.)	8	Vdc
Supply Current (Icc, typ.)	29	mA


All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES
<ul style="list-style-type: none"> • AN-100/1 : Mounting and Grounding of VCOs • AN-102 : Proper Output Loading of VCOs • AN-107 : How to Solder Z-COMM VCOs
NOTES:

TUNING CURVE, typ.

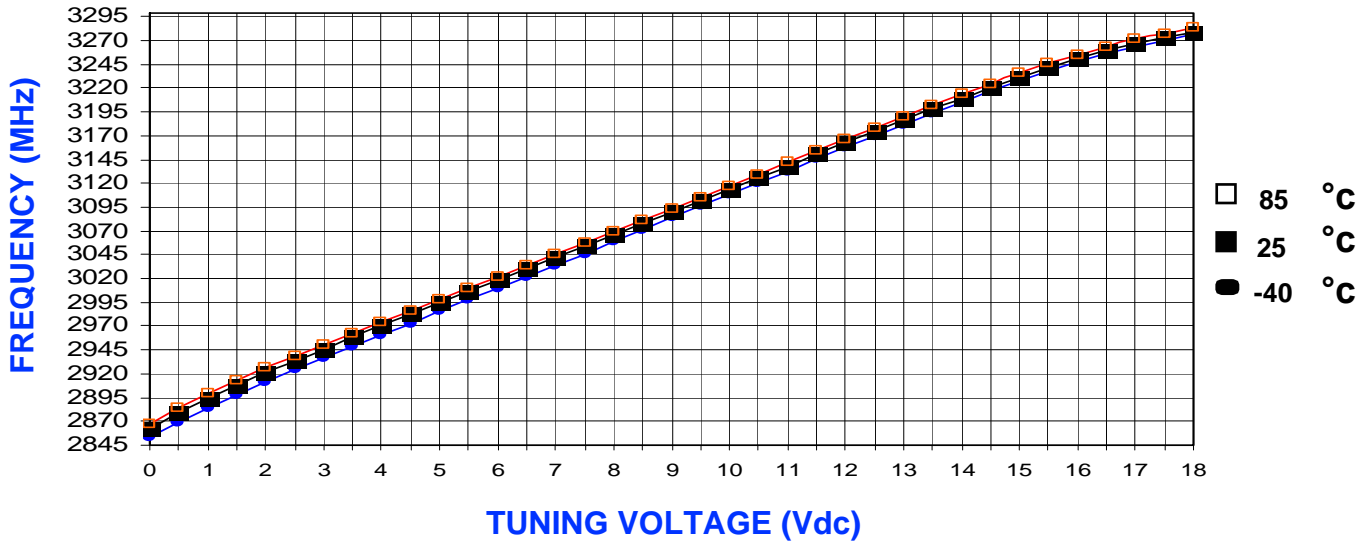

POWER CURVE, typ.

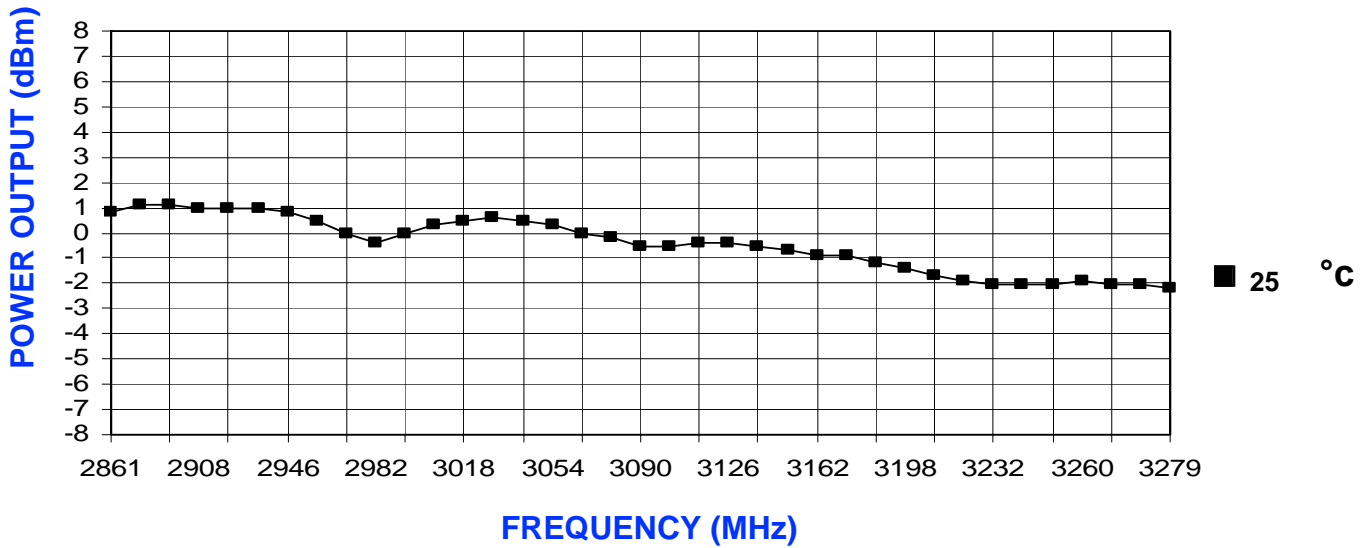

PHYSICAL DIMENSIONS

