



CS5262AN Datasheet TEL:13699758578 QQ:1176845380

DP1.4 to HDMI2.0 and VGA Converter

Contents

1	Introduction.....	5
2	Features.....	6
3	Pin Definition.....	7
3.1	Pin Assignments.....	7
3.2	Pin Description.....	7
4	Electrical Specifications.....	10
4.1	Absolute Maximum Conditions	10
4.2	Operating Conditions.....	10
4.3	Electrical Specification	10
5	Package Specification.....	12
6	Ordering Information.....	13
7	Revision History.....	14

List of Figures

<i>Figure 1-1 CS5262AN Block Diagram</i>	5
<i>Figure 3-1 CS5262AN Pin Layout</i>	7
<i>Figure 5-1 CS5262AN Package Outline (QFN68 Leads 8x8mm²)</i>	12

List of Tables

<i>Table 3-1 CS5262AN Pin Definitions</i>	7
<i>Table 4-1 Absolute Maximum Conditions</i>	10
<i>Table 4-2 Normal Operating Conditions</i>	10
<i>Table 4-3 DC Electrical Specification</i>	10
<i>Table 5-1 Package Dimension</i>	12
<i>Table 6-1 CS5262AN Ordering Information</i>	13
<i>Table 7-1 Document Revision History</i>	14

1 Introduction

The Capstone CS5262AN is a high-performance DP1.4 to HDMI2.0b and VGA converter, designed to connect a DP1.4 source to an HDMI2.0 sink. The CS5262AN integrates a DP1.4 compliant receiver, an HDMI2.0 compliant transmitter and a VGA output interface.

The DP interface comprises 4 main lanes, AUX channel, and HPD signal. The receiver supports maximum 5.4Gbps (HBR2) data rate per lane. The DP receiver incorporates both HDCP1.4 and HDCP2.3 content protection scheme with embedded key for secure transmission of digital audio-video content.

The HDMI interface includes 4 TMDS clock/data pairs, DDC, and HPD signal. The HDMI transmitter is capable of supporting up to 6Gbps data rate, quite adequate for handling video resolutions up to FHD 1080p 120Hz and UHD 4k 60Hz formats. The HDMI transmitter incorporates HDCP engines which support both HDCP1.4 and HDCP2.3. With the inclusion of HDCP, the CS5262AN allows secure transmission of protected content.

Embedded key is available that provides the highest level of HDCP key security.

The CS5262AN is a highly integrated single chip suitable for multiple market segments and display applications, such as the dongle, docking station etc.

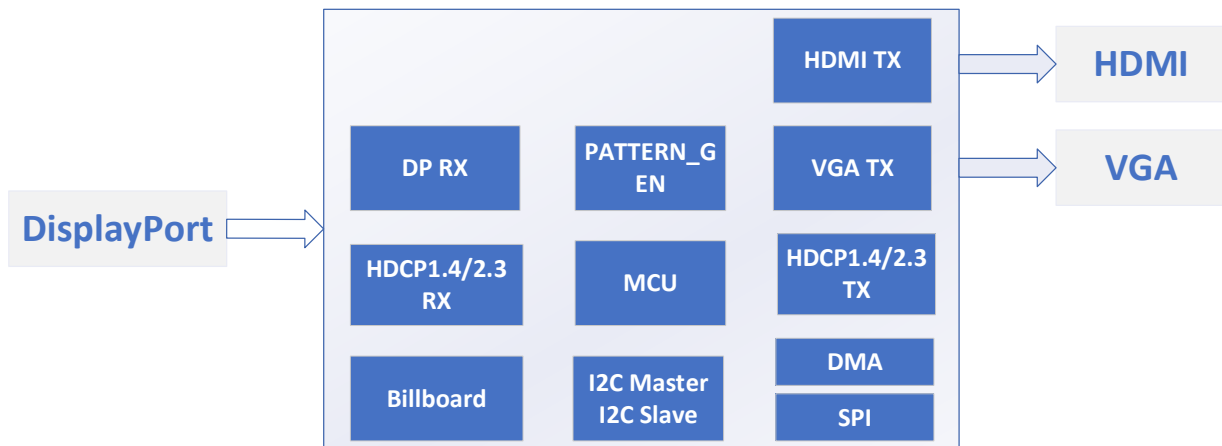


Figure 1-1 CS5262AN Block Diagram

2 Features

General

- VESA DisplayPort™ (DP) v1.4 compliant receiver
- HDMI specification v2.0b compliant transmitter, data rate up to 6-Gbps per channel.
- Embedded oscillator and there's no need for the external crystal
- Embedded MCU and SPI flash
- Embedded V-sync/H-sync buffer
- Embedded EDID (CS5262AN will response EDID if terminal device doesn't have it)
- Support both HDCP 1.4 & HDCP2.3 with on-chip keys to support HDCP repeater.
- Support RGB 4:4:4 8/10bit bpc and YCbCr 4:4:4 , 4:2:2 ,4:2:0 8/10-bit bpc
- Max audio sample rate of 192KHz x8 channels
- LPCM and Compressed Audio encoding formats
- AUX channel, I2C host interface for chip control

DisplayPort Input (receiver)

- VESA DisplayPort™ v1.4 compliant. Support 4-lane.
- Up to HBR2(5.4-Gbps) input. Built-in high-performance adaptive equalizer. Support 1-MHz AUX channel
- Support Hot Plug Detect (HPD)

HDMI Digital Output

- HDMI 2.0b compliant
- Max data rate up to 6-Gbps per channel
- Support up to 3840 x 2160@60Hz or 4096x2160@60Hz
- Audio stream handling
- LPCM and Compressed Audio encoding formats
- Max audio sample rate of 192k Hz x8 channels Support High Dynamic Range (HDR) metadata handling

VGA Output Interface

- Triple 8-bit DAC (Digital-to-Analog Converter) with clock up to 210-MHz
- Support up to 1920x1200x60, 1920x1440x60 (reduced blanking), 2048x1152x60 (reduced blanking), and 2048x1536x60 (reduced blanking)
- Embedded V-sync/ H-sync buffer
- VESA VSIS v1r2 compliant

MISC

- Support I2C Master and Slave up to 400-kHz.
- HBM 4KV for connector pins
- 8*8mm 68-pin QFN package with e-Pad

Power & Technology

- 5V/1.0V system voltage, integrated 3.3V LDO.

3 Pin Definition

3.1 Pin Assignments

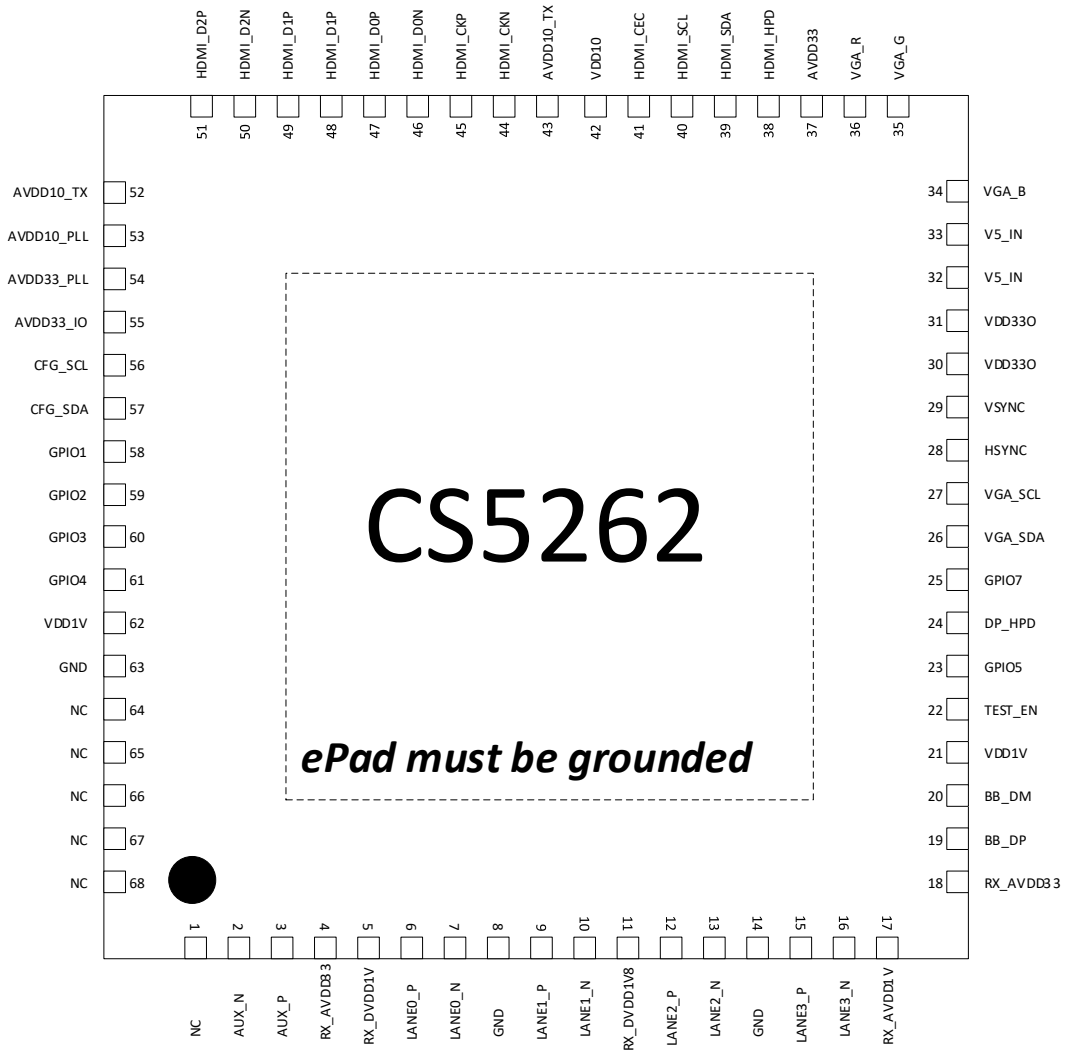


Figure 3-1 CS5262AN Pin Layout

3.2 Pin Description

Table 3-1 CS5262AN Pin Definitions

Pin #	Description	Type	PU/PD	Note
1	NC	--		Reserved
2	AUX_N	AIO		DisplayPort AUX channel positive

Pin #	Description	Type	PU/PD	Note
3	AUX_P	AIO		DisplayPort AUX channel negative
4	RX_AVDD33	P	-	3.3V power input
5	RX_DVDD1V	P	-	1.0V power input
6	LANE0_P	AI		DisplayPort Rx lane0 positive
7	LANE0_N	AI		DisplayPort Rx lane0 negative
8	GND	P		GND
9	LANE1_P	AI		DisplayPort Rx lane1 positive
10	LANE1_N	AI		DisplayPort Rx lane1 negative
11	RX_DVDD1V8	P	-	1.8V LOD output, connect a 4.7uF capacitor on it.
12	LANE2_P	AI		DisplayPort Rx lane2 positive
13	LANE2_N	AI		DisplayPort Rx lane2 negative
14	GND	P		GND
15	LANE3_P	AI		DisplayPort Rx lane3 positive
16	LANE3_N	AI		DisplayPort Rx lane3 negative
17	RX_AVDD1V	P	-	1.0V power input
18	RX_AVDD33	P	-	3.3V power input
19	BB_DP	AIO		USB D- signal for billboard device
20	BB_DM	AIO		USB D+ signal for billboard device
21	VDD1V	P	-	1.0V power input
22	TEST_EN	I	PD	1: Test mode. 0: Normal mode.
23	GPIO5	I/O		General input output
24	DP_HPD	I/O		GPIO6 as DisplayPort HPD
25	GPIO7	I/O	-	General input output
26	VGA_SDA	I/O	-	VGA DDC clock (GPIO12)
27	VGA_SCL	I/O		VGA DDC data (GPIO13)
28	HSYNC	O	-	VGA horizontal sync output
29	VSYNC	O	-	VGA vertical sync output
30	VDD330	P	-	3.3V power output
31	VDD330	P	-	3.3V power output
32	V5_IN	P	-	5V power input
33	V5_IN	P	-	5V power input
34	VGA_B	O		VGA Blue channel output
35	VGA_G	O	-	VGA Green channel output
36	VGA_R	O	-	VGA Red channel output
37	AVDD33	P	-	3.3V power input for VGA
38	HDMI_HPD	I/O	PD	HDMI Hot Plug detect output (GPIO11)

Pin #	Description	Type	PU/PD	Note
39	HDMI_SDA	I/O	PU	HDMI DDC data (GPIO10)
40	HDMI_SCL	I/O	PU	HDMI DDC clock (GPIO9)
41	HDMI_CEC	I/O		HDMI CEC Pin (GPIO8)
42	VDD10	P		1.0V power input
43	AVDD10_TX	P	-	1.0V power input
44	HDMI_CKN	I	-	HDMI clock differential pair N input
45	HDMI_CKP	I	-	HDMI clock differential pair P input
46	HDMI_D0N	I	-	HDMI data channel 0 different pair N input
47	HDMI_D0P	I	-	HDMI data channel 0 different pair P input
48	HDMI_D1P	I	-	HDMI data channel 1 different pair N input
49	HDMI_D1P	I	-	HDMI data channel 1 different pair P input
50	HDMI_D2N	I	-	HDMI data channel 2 different pair N input
51	HDMI_D2P	I	-	HDMI data channel 2 different pair P input
52	AVDD10_TX	P		1.0V power input
53	AVDD10_PLL	P	-	1.0V power input
54	AVDD33_PLL	P	-	3.3V power input
55	AVDD33_IO	P		3.3V power input
56	CFG_SCL	I/O	-	I2C slave CLOCK pin
57	CFG_SDA	I/O	-	I2C slave DATA pin
58	GPIO1	I/O		General input output
59	GPIO2	I/O		General input output
60	GPIO3	I/O		General input output
61	GPIO4	I/O		General input output
62	VDD1V	P	-	1.0V power input
63	GND	P		GND
64	NC	--		Reserved
65	NC	--		Reserved
66	NC	--		Reserved
67	NC	--		Reserved
68	NC	--		Reserved

4 Electrical Specifications

4.1 Absolute Maximum Conditions

Permanent damage may occur if absolute maximum conditions are violated. Refer to Section 4.2 for functional operating limits.

Table 4-1 Absolute Maximum Conditions

Symbol	Parameter	Min	Typ	Max	Unit
VDD5_IN	5V Power Input	-0.3	—	6	V
VDD33	3.3V power input	-0.3	—	3.96	V
VDD10	1.0V power input	-0.3	—	1.2	V
T _A	Junction temperature	-40	—	125	°C
Q _{JA}	Storage temperature ¹	-65	—	150	°C
ESD _{HBM}	ESD protection (Human body model)	—	—	±4	KV
ESD _{CDM}	ESD protection (Charge Device model)	—	—	700	V

1. Max 260°C can be guaranteed with max 8 sec soldering time.

4.2 Operating Conditions

Table 4-2 Normal Operating Conditions

Symbol	Parameter	Min	Typ	Max	Unit
VDD33_OUT	3.3V LDO output	3.0	3.3	3.6	V
VDD5_IN	5V Power Input	4.75	5	5.25	V
VDD33	3.3V power input	3.0	3.3	3.6	V
VDD10	1.0V power input	0.95	1.0	1.1	V
T _A	Ambient temperature	-10		70	°C
Q _{JA}	Package thermal resistance, no air flow	—	39.3	—	°C/W

4.3 Electrical Specification

Table 4-3 DC Electrical Specification

Symbol	Parameter	For 3.3V I/O		
		Min	Typ	Max
V _{il} (V)	Input low voltage	—	—	0.8
V _{ih} (V)	Input high Voltage	2.0	—	—
V _{ol} (V)	Output low voltage	0	—	0.4
V _{oh} (V)	Output high voltage ¹	2.4	—	—

Symbol	Parameter	For 3.3V I/O		
		Min	Typ	Max
I_{in} (uA)	Input leakage current	-10	—	+10
I_{hiz} (uA)	Output tri-state leakage current	-10	—	+10

5 Package Specification

Figure 5-1 CS5262AN Package Outline (QFN68 Leads 8x8mm²)

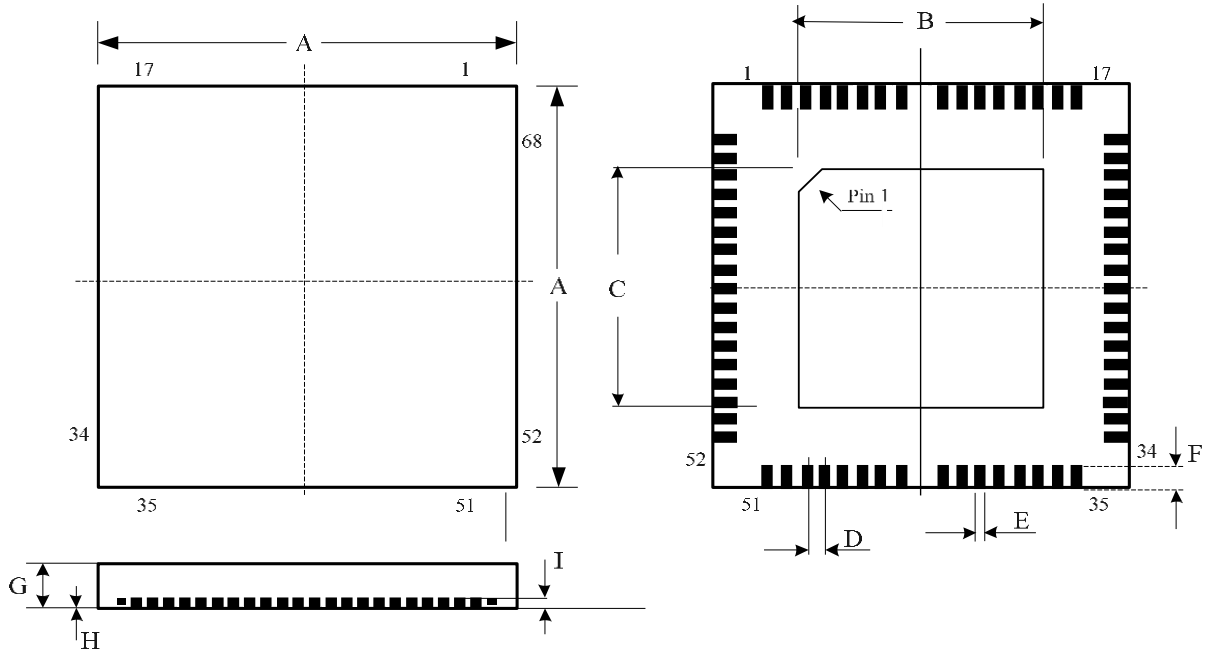


Table 5-1 Package Dimension

Symbol	Dimension in mm			Dimension in inch		
	Min	Normal	Max	Min	Normal	Max
A	7.9	8.0	8.1	0.311	0.314	0.319
B	5.50	5.70	5.90	0.217	0.224	0.232
C	5.50	5.70	5.90	0.217	0.224	0.232
D		0.40 BSC			0.016 BSC	
E	0.15	0.20	0.25	0.006	0.008	0.010
F	0.30	0.40	0.50	0.012	0.016	0.020
G	0.80	0.85	0.90	0.031	0.033	0.035
H	0	0.02	0.05	0	0.001	0.002
I		0.20 REF			0.008 REF	

6 Ordering Information

The CS5262AN can be ordered using the part numbers in Table 6-1. Please consult sales for further details.

Table 6-1 CS5262AN Ordering Information

Part No.	Description	Temperature Range	Packing Type
CS5262AN	68 Pin (QFN) Lead-free package	Commercial : 0 to 70 degree C	Sample

7 Revision History

Table 7-1 Document Revision History

Revision	Date	Changes
Draft V0.1	Oct. 2020	First draft version.
Draft V0.2	Dec. 2020	Update Pin Assignments.
Draft V0.3	Mar. 2021	First release.
Release V1.0	June. 2021	Update Package Specification.