

SMD CRYSTAL

Ultrathin thickness 0.45mm.
Automatic mounting is possible.
Reflow is possible
RoHs compliant and lead free.


Part Numbering Example: CX2016Z - A0 - B3 C3 -150 - 16.0 D12

CX2016	Z	A0	B3	C3	150	16.0	D10	
SERIES	ADDED FEATURES	OPERATING TEMP.	STABILITY	TOLERANCE	RESISTANCE	FREQUENCY	LOAD CAP.	OVERTONE
CX2016	Z = TAPE AND REEL	A0 = -10°C ~ +60°C	B3 = ± 30 B4 = ± 10	C3 = ± 30 C4 = ± 10	SEE TABLE 1 BELOW		D8, D10, ETC.	BLANK: FUND.

**NOTE: The above ABC combinations cover basic specification options. We tailor our crystals specifications to meet customer requirements. Please contact our sales department if you don't see exactly what you need.*

Specifications:

Frequency Range:	16.0 ~ 60.0 MHz
Vibration Mode:	AT cut, Fundamental
Frequency Tolerance: (at 25°C)	-/+ 10ppm, +/- 30 ppm, or specify
Equivalent Series Resistance:	See table No. 1
Frequency Stability:	-/+ 10 ppm, +/- 30 ppm, or specify
Operating Temperature Range:	-10~ + 60°C , or specify
Shunt Capacitance:	3.5pF max.
Load Capacitance:	8pF, 10pF, or specify
Aging:	-/+2ppm/year, +/- 5ppm/year
Drive Level:	100uW max.
Min. Packaging	3,000 pcs / Reel

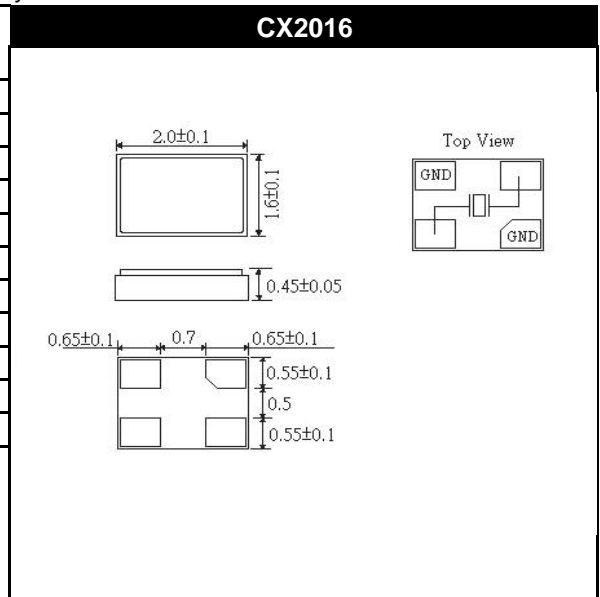

Equivalent Series Resistance Table No. 1

Frequency	Mode	ESR
16.0~20.0 MHz	Fundamental	200 ohms max
21.0~25.0 MHz	Fundamental	120 ohms max
26.0~40.0 MHz	Fundamental	100 ohms max
41.0~60.0 MHz	Fundamental	60 ohms max

