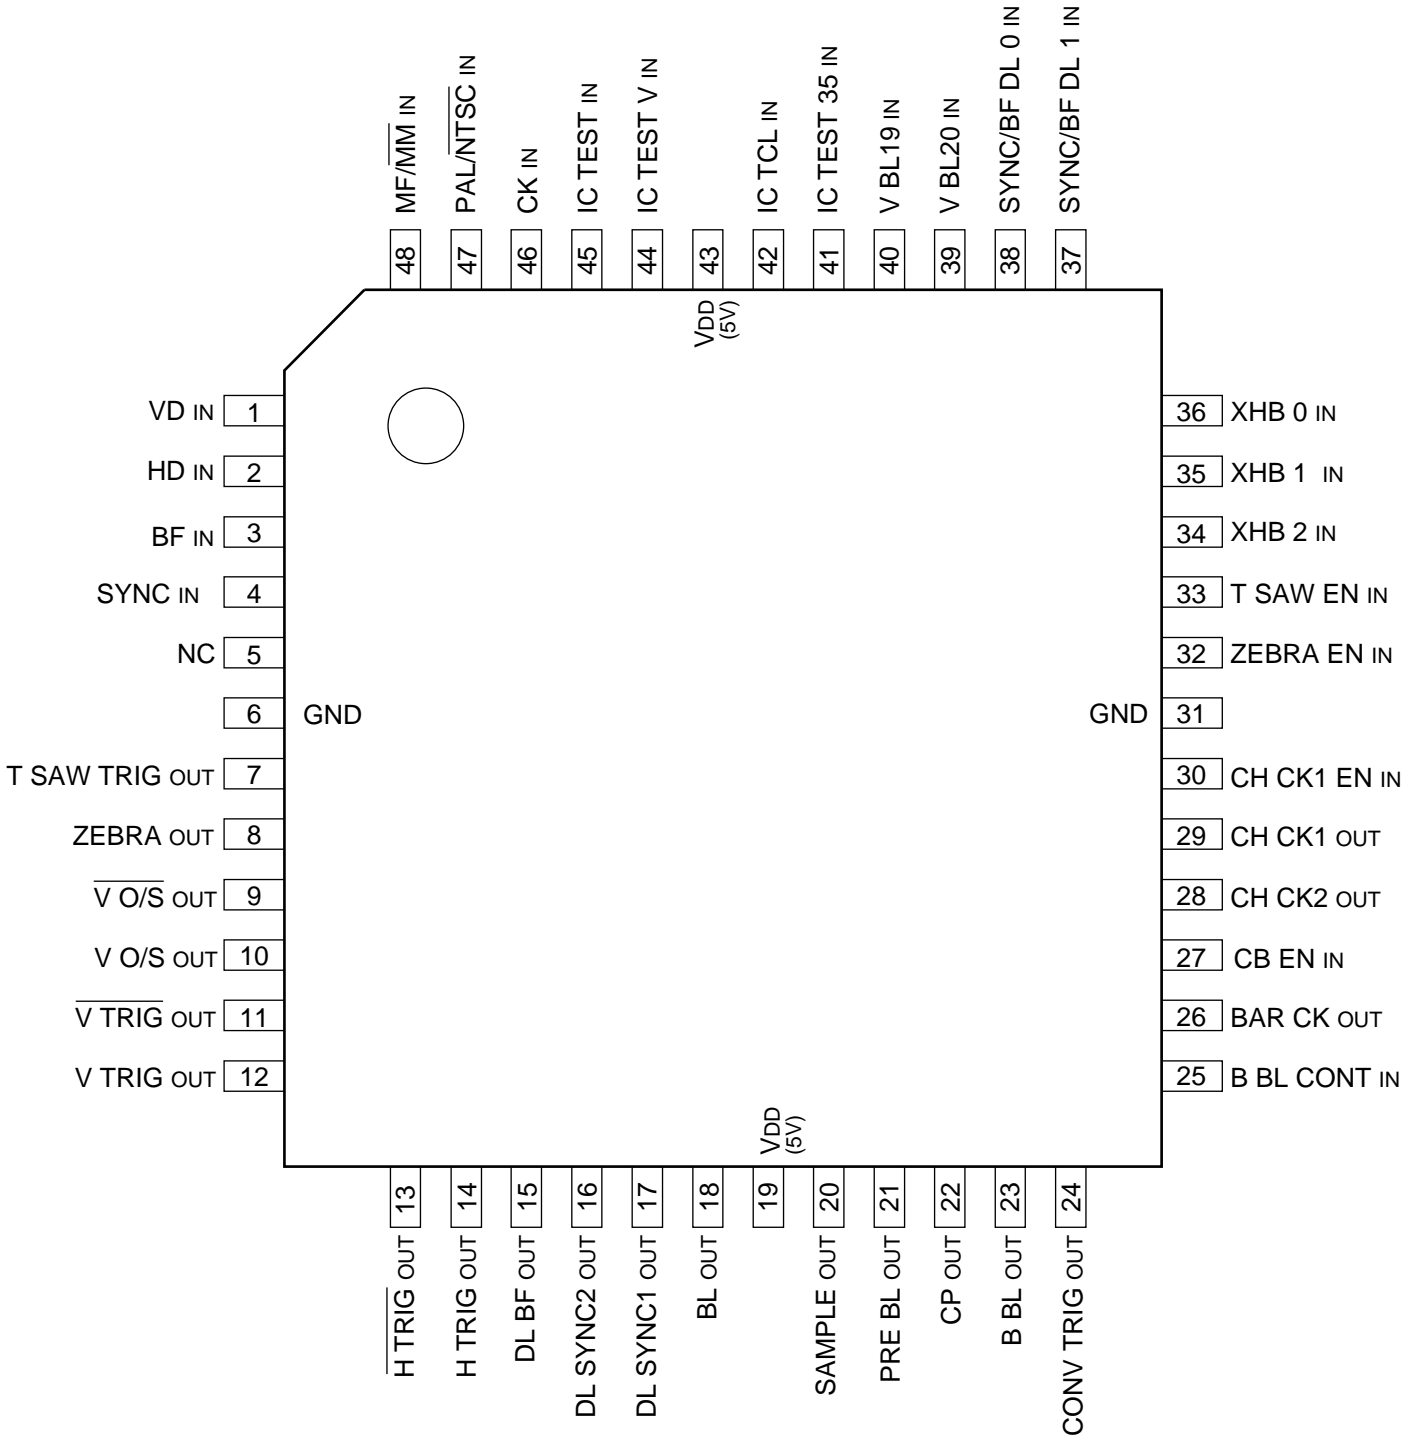

C-MOS PULSE GENERATOR
-TOP VIEW-



1. SYSTEM DESIGNATION

INPUT		SYSTEM
PAL/NTSC IN		
1		PAL, SECAM
0		NTSC, PALM

2. TYPE OF TUBE

INPUT		FUNCTION
MF/MM IN		
1		MAG-STA TUBE
0		MAG-MAG TUBE

3. V BLKG WIDTH (NTSC ONLY)

INPUT		V BLKG WIDTH
V BL 19	V BL 20	
1	X	19H
0	1	20H
0	0	21H

4. H BLKG WIDTH

INPUT			BLKG WIDTH (μ S)	
XHB2	XHB1	XHB0	NTSC	PAL
1	1	1	10.27	11.49
1	1	0	10.34	11.56
1	0	1	10.41	11.63
1	0	0	10.48	11.70
0	1	1	10.55	11.77
0	1	0	10.62	11.84
0	0	1	10.69	11.91
0	0	0	10.76	11.98

5. DELAY TIME

INPUT		DELAY TIME (nS)		
SYNC/BF DL1	SYNC/BF DL2	DL SYNC 1	DL SYNC 2	DL BF
1	1	140	210	140
1	0	210	280	210
0	1	630	700	630
0	0	700	770	700

1 ; HIGH LEVEL
 0 ; LOW LEVEL
 X ; DON'T CARE

