

SHINDENGEN

Schottky Rectifiers (SBD)

Single

D5S9M

90V 5A


FEATURES

- Tj150
- P_{RRSM} avalanche guaranteed
- Fully Isolated Molding

APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

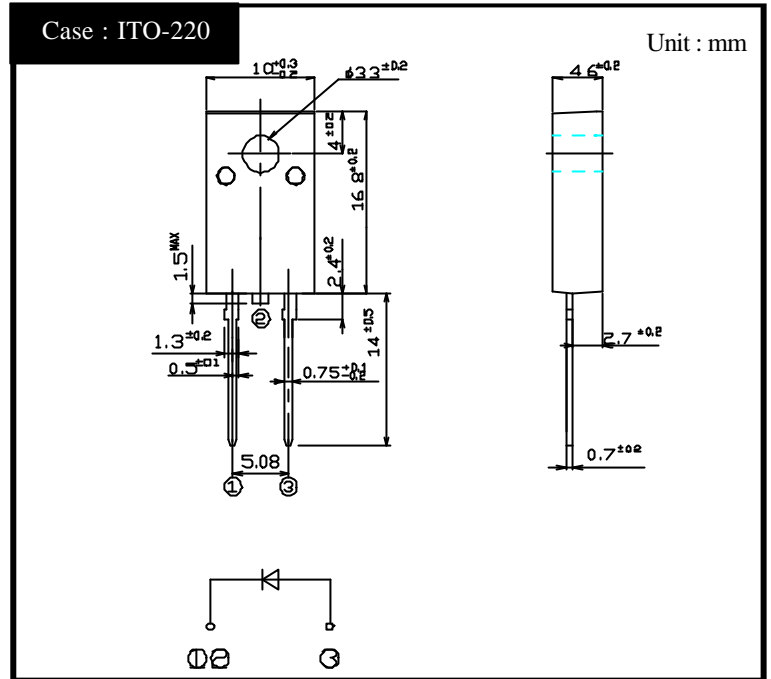

RATINGS

Absolute Maximum Ratings (If not specified T_c=25)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-40 ~ 150	
Operating Junction Temperature	T _j		150	
Maximum Reverse Voltage	V _{RM}		90	V
Repetitive Peak Surge Reverse Voltage	V _{RRSM}	Pulse width 0.5ms, duty 1/40	100	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, T _c =121	5	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, T _j =125	100	A
Repetitive Peak Surge Reverse Power	P _{RRSM}	Pulse width 10 μs, T _j =25	330	W
Dielectric Strength	V _{dis}	Terminals to case, AC 1 minute	1.5	kV
Mounting Torque	TOR	(Recommended torque 0.3N·m)	0.5	N·m

Electrical Characteristics (If not specified T_c=25)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =5A, Pulse measurement	Max.0.75	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement	Max. 3.0	mA
Junction Capacitance	C _j	f=1MHz, V _R =10V	Typ.185	pF
Thermal Resistance	θ _{JC}	junction to case	Max.4.5	/W


D5S9M

Forward Voltage

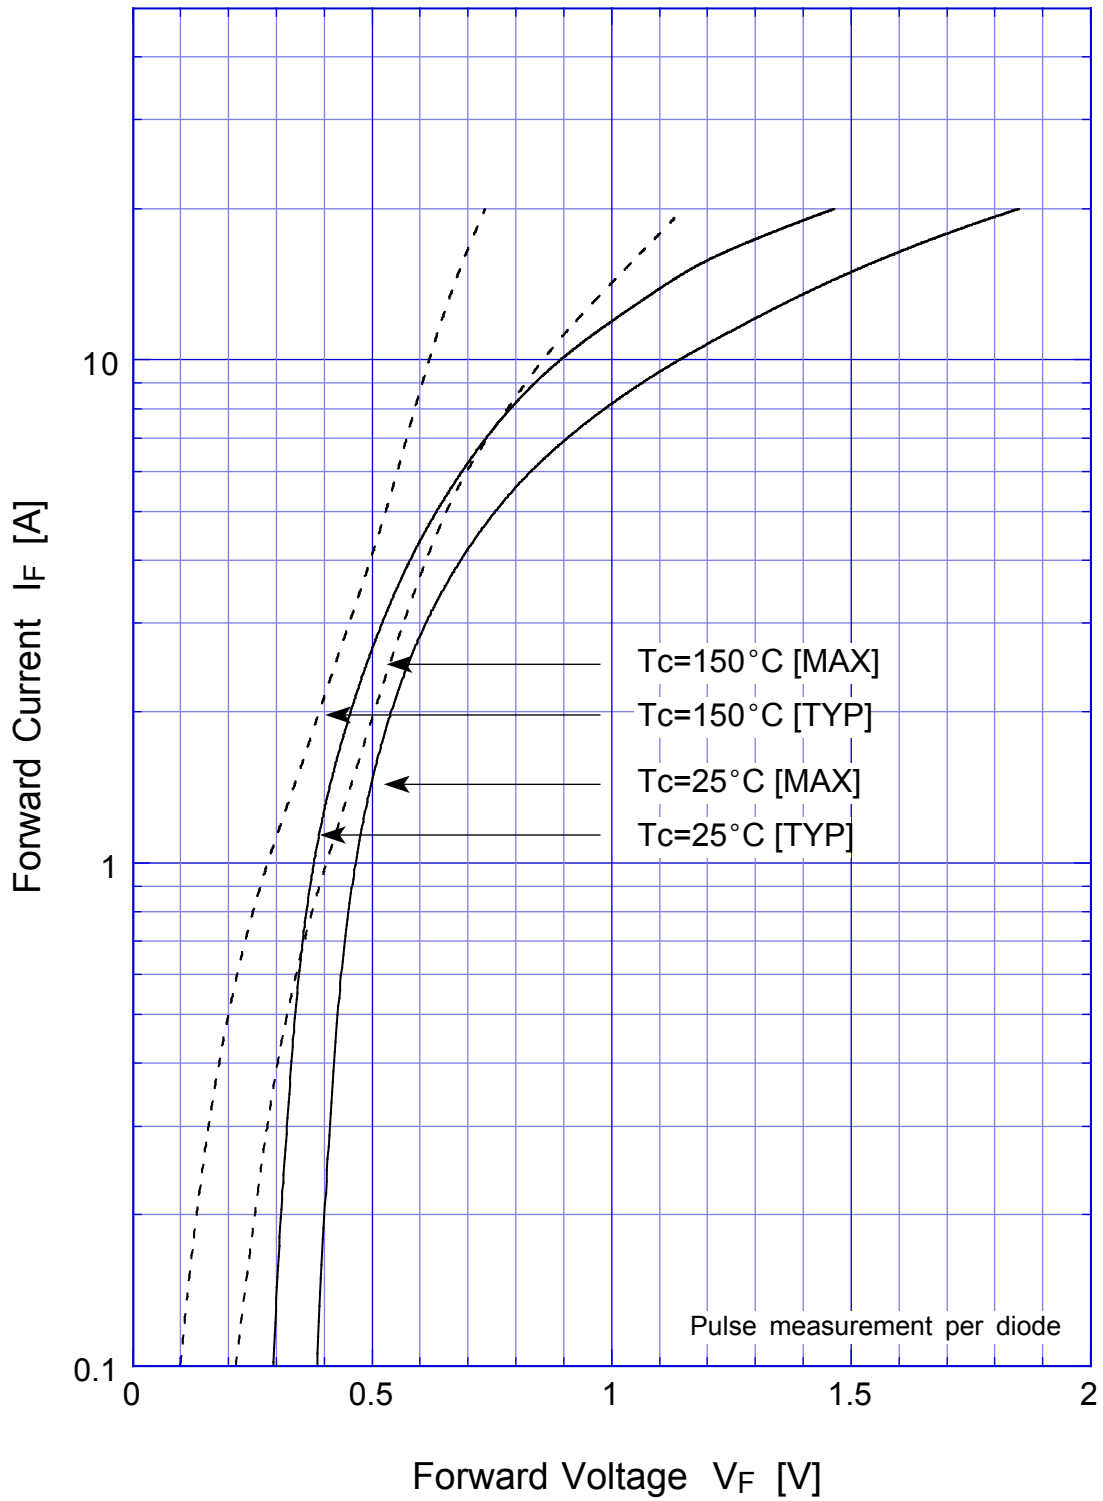


D5S9M

Junction Capacitance

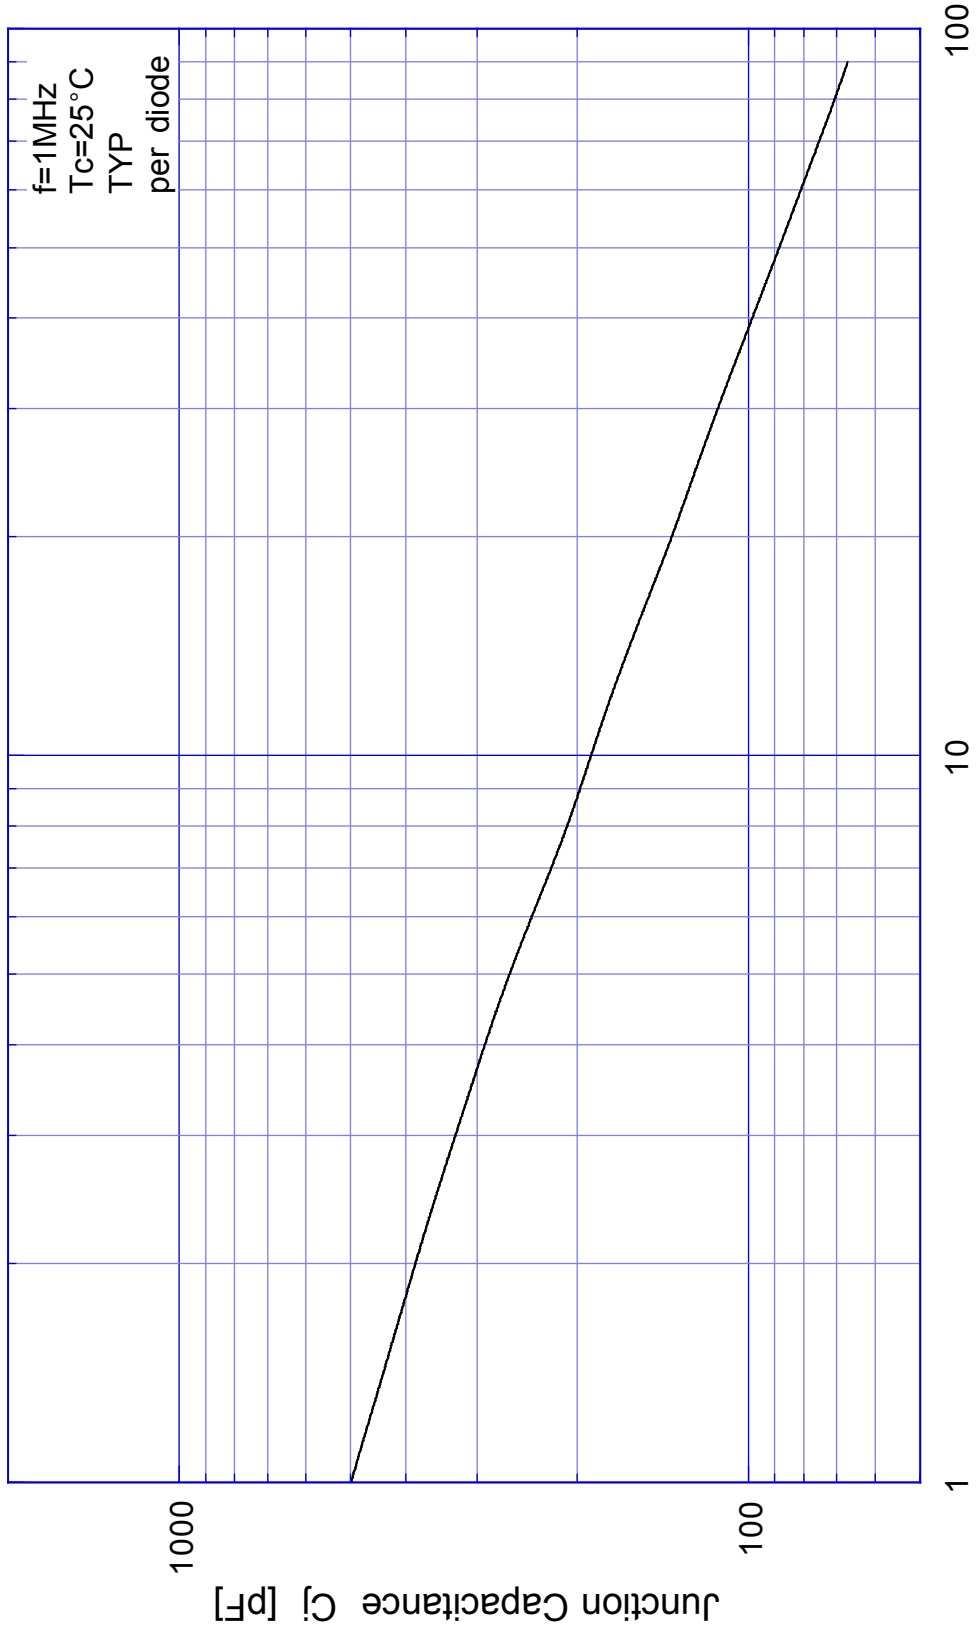


D5S9M

Reverse Current

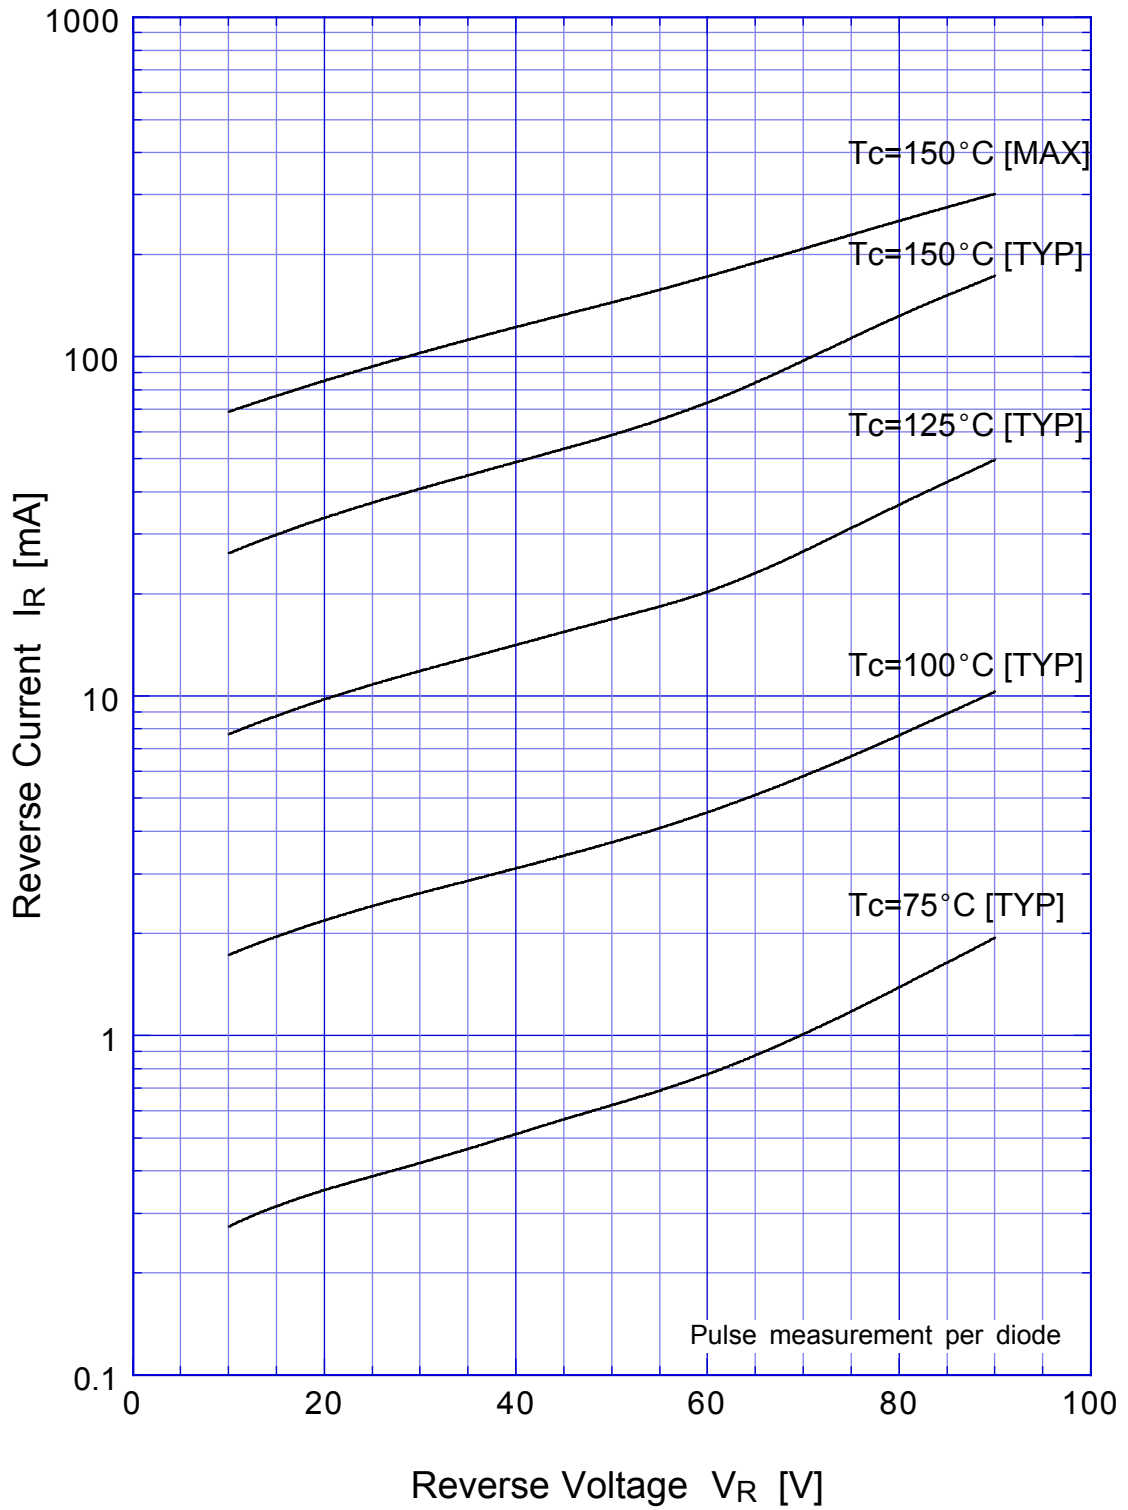


D5S9M

Reverse Power Dissipation

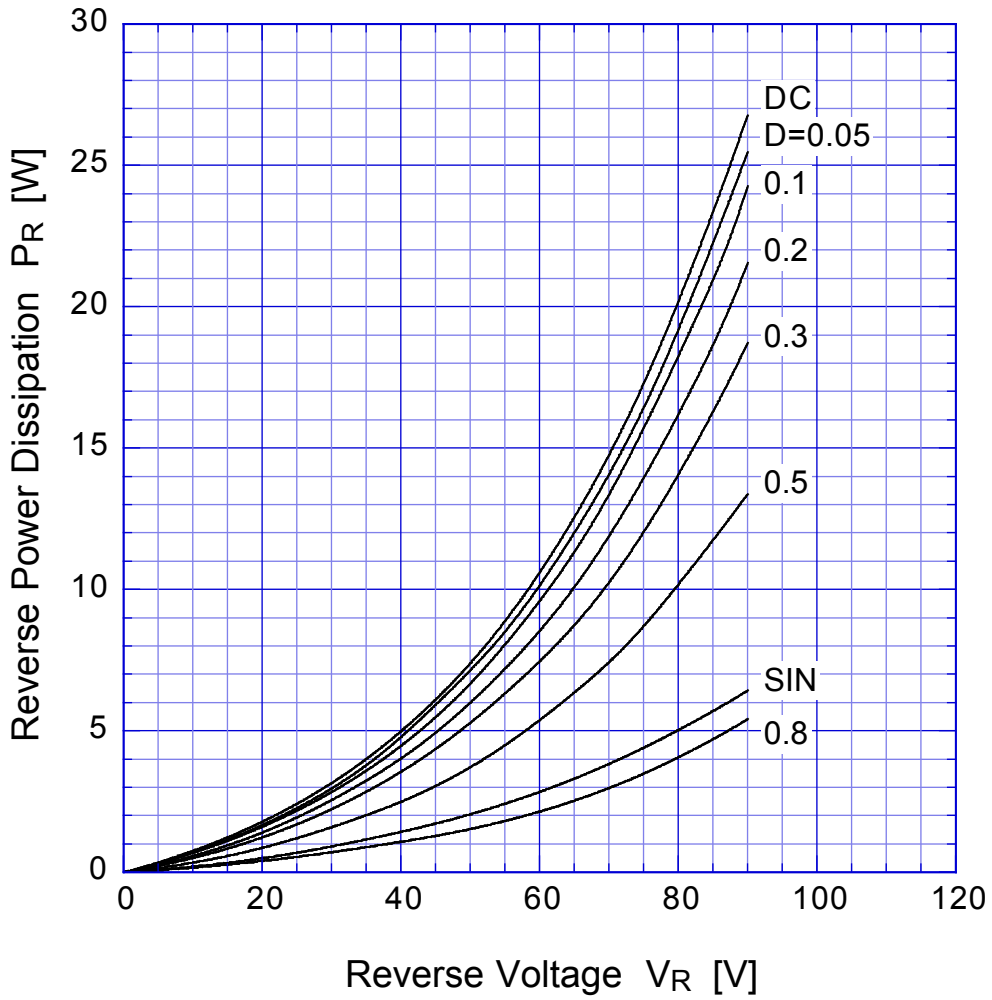


$T_j = 150^\circ\text{C}$

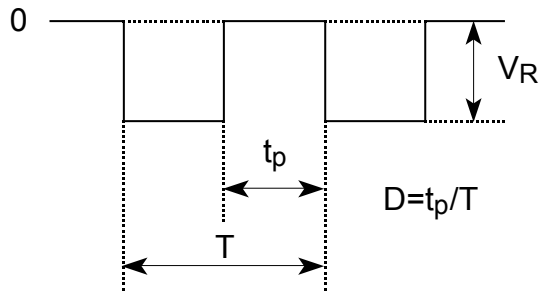


D5S9M

Forward Power Dissipation

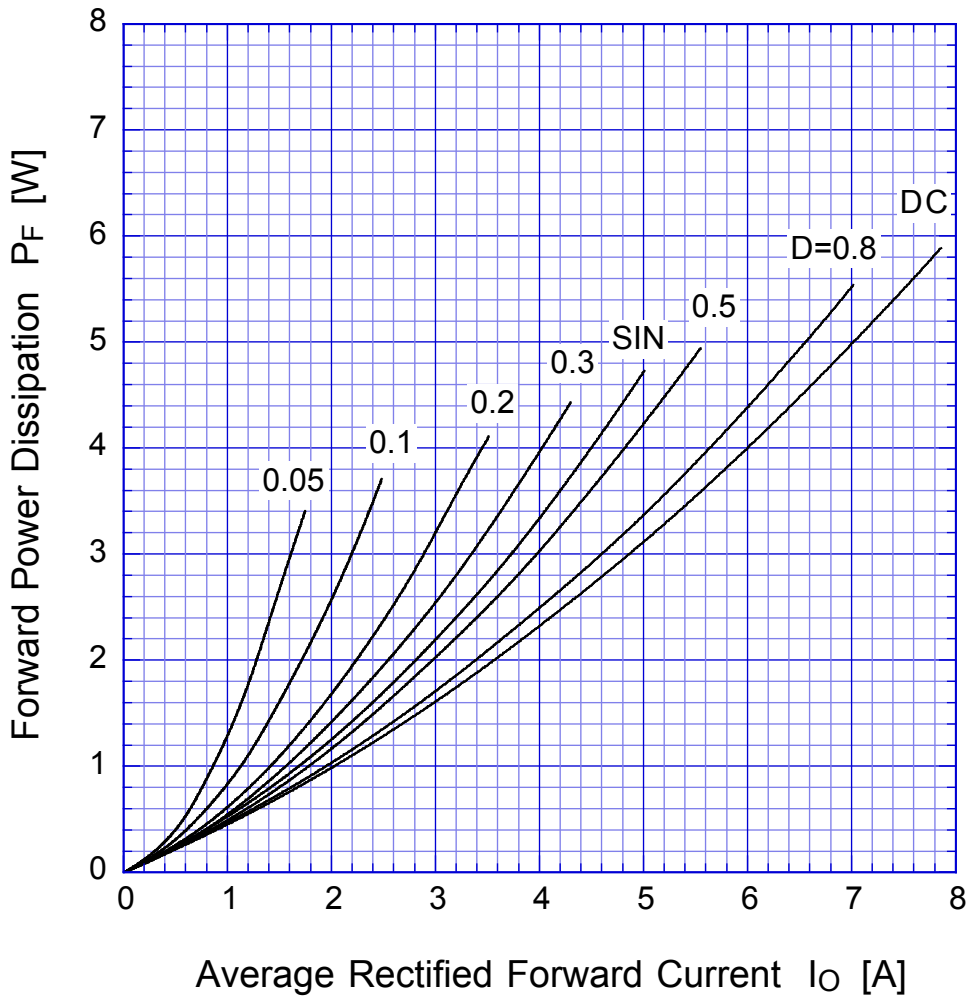


$T_j = 150^\circ\text{C}$

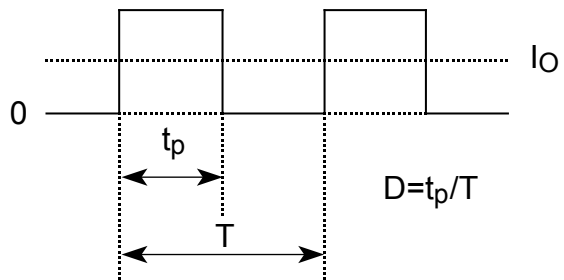

D5S9M

Derating Curve

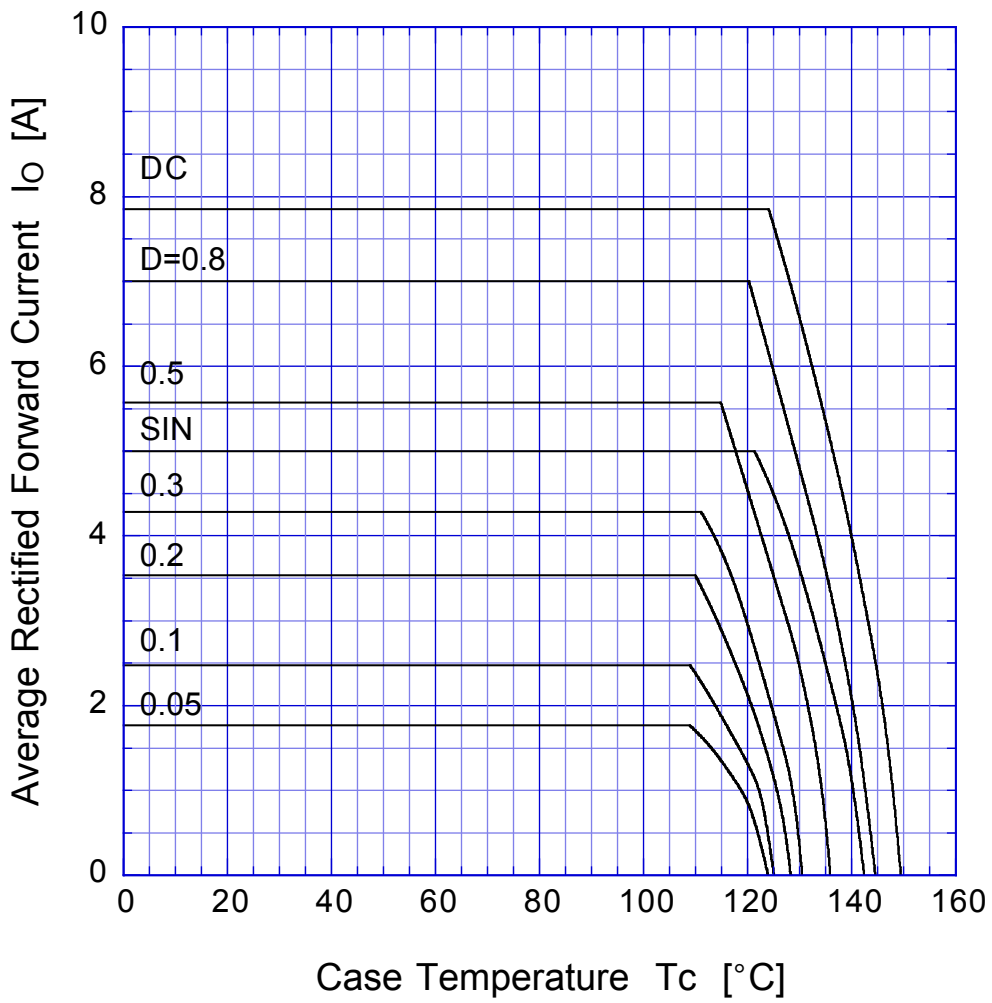


$V_R = 45V$




D5S9M

Derating Curve

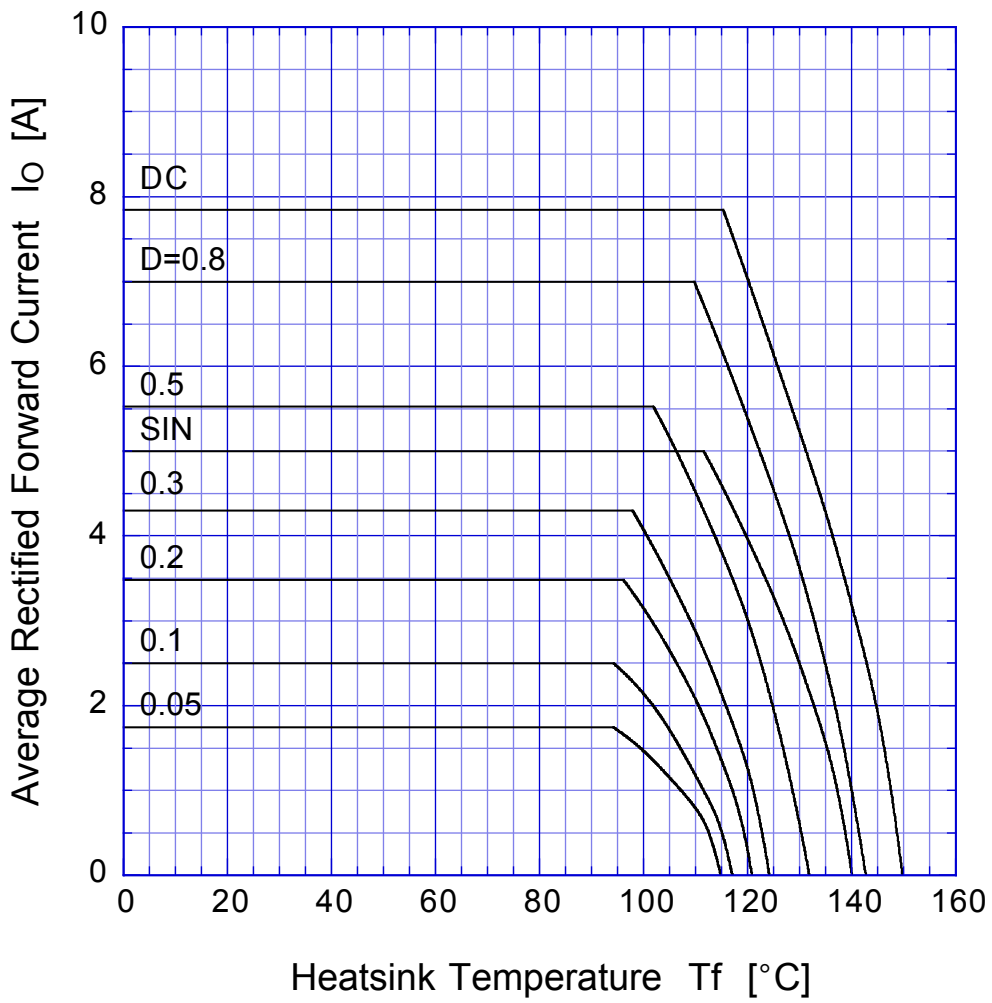


$V_R = 45V$


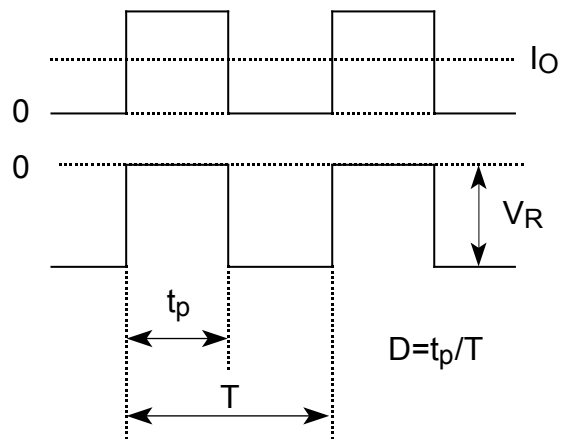


D5S9M

Peak Surge Forward Capability

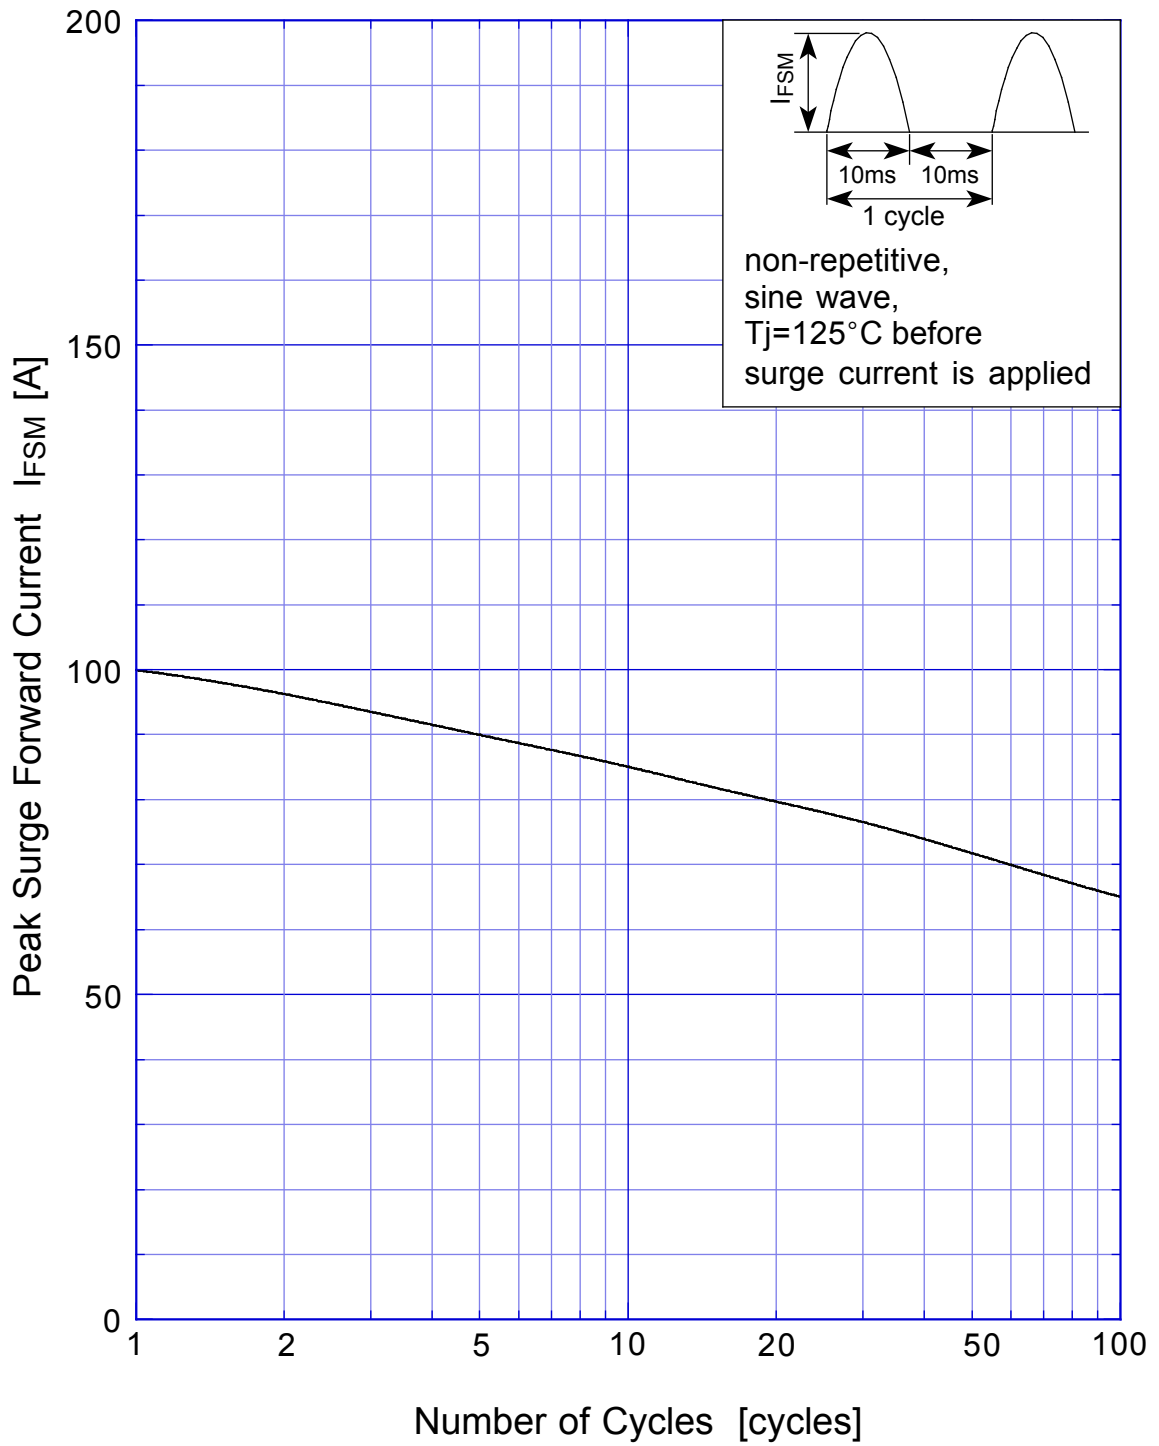

SBD Repetitive Surge Reverse Power Derating Curve

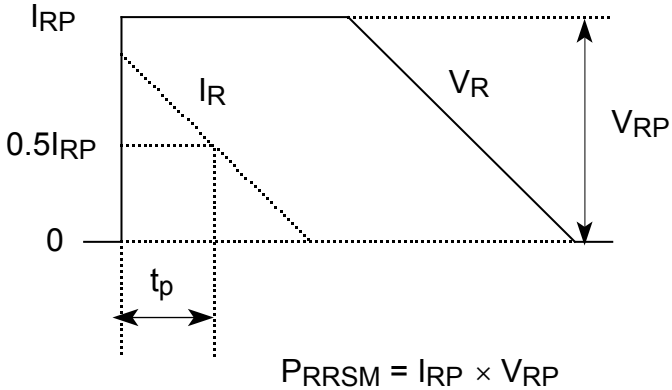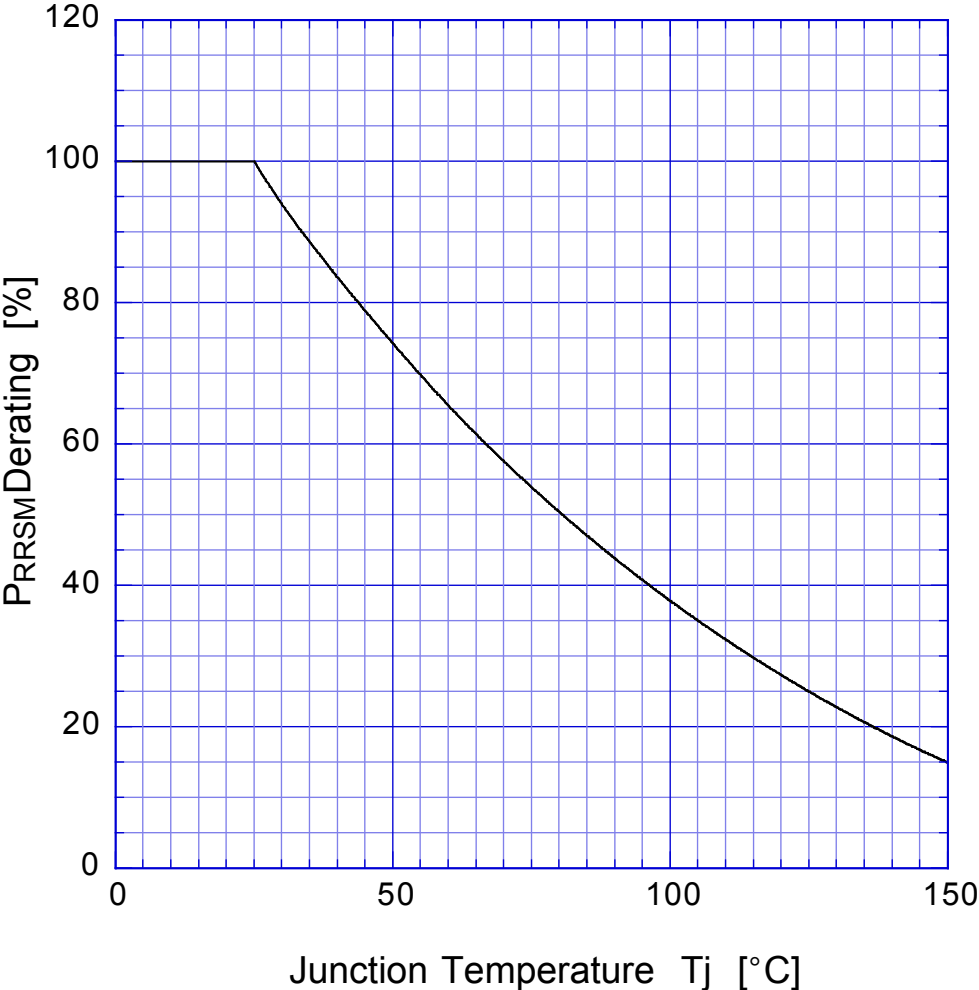

SBD

Repetitive Surge Reverse Power Capability

