


Data Sheet

DC0900U05

Directional Coupler


830 MHz-930 MHz



Yantel
Key Patents Lead Microwave Tech


Features

- Small Size (2×2mm)
- Very Low Loss
- Excellent directivity
- Broad frequency coverage
- High Isolation
- Low VSWR
- Good Repeatability
- Tape & Reel
- Power handling:5 watts

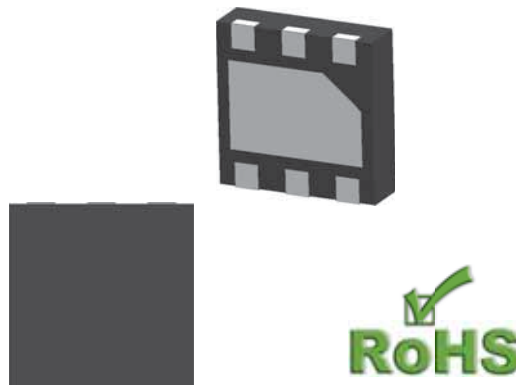

Applications

- Phase shifter / Attenuator
- Balanced amplifier / LNA configurations
- Modulators
- Mixers
- Power combining /dividing

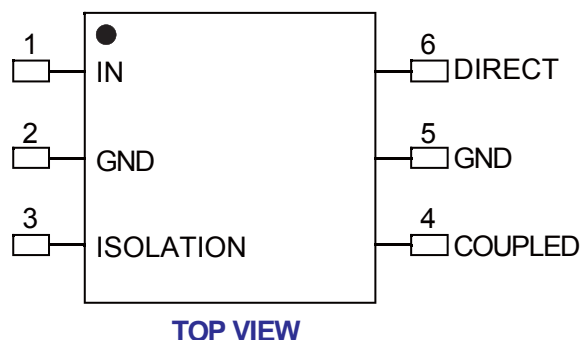

Electrical Specifications at 25° C

Part No.	Freq. Range (MHz) FL~FU	Power (W)	Size LxW (mm)	Coupling (dB)	Insertion loss (dB)	VSWR(:1)	Directivity (dB)
DC0900U05	830~880	5	2X2	4.7~5.0	0.25	1.03	24.9
	880~930			4.3~4.7	0.25	1.03	25.3

Yantel Corporation

Add : 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel : 86-755-8355-1886 Fax : 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Data Sheet


DC0900U05

Directional Coupler

830 MHz-930 MHz



Typical Performance (-40°C, 25°C, 85°C: 800-1000 MHz)

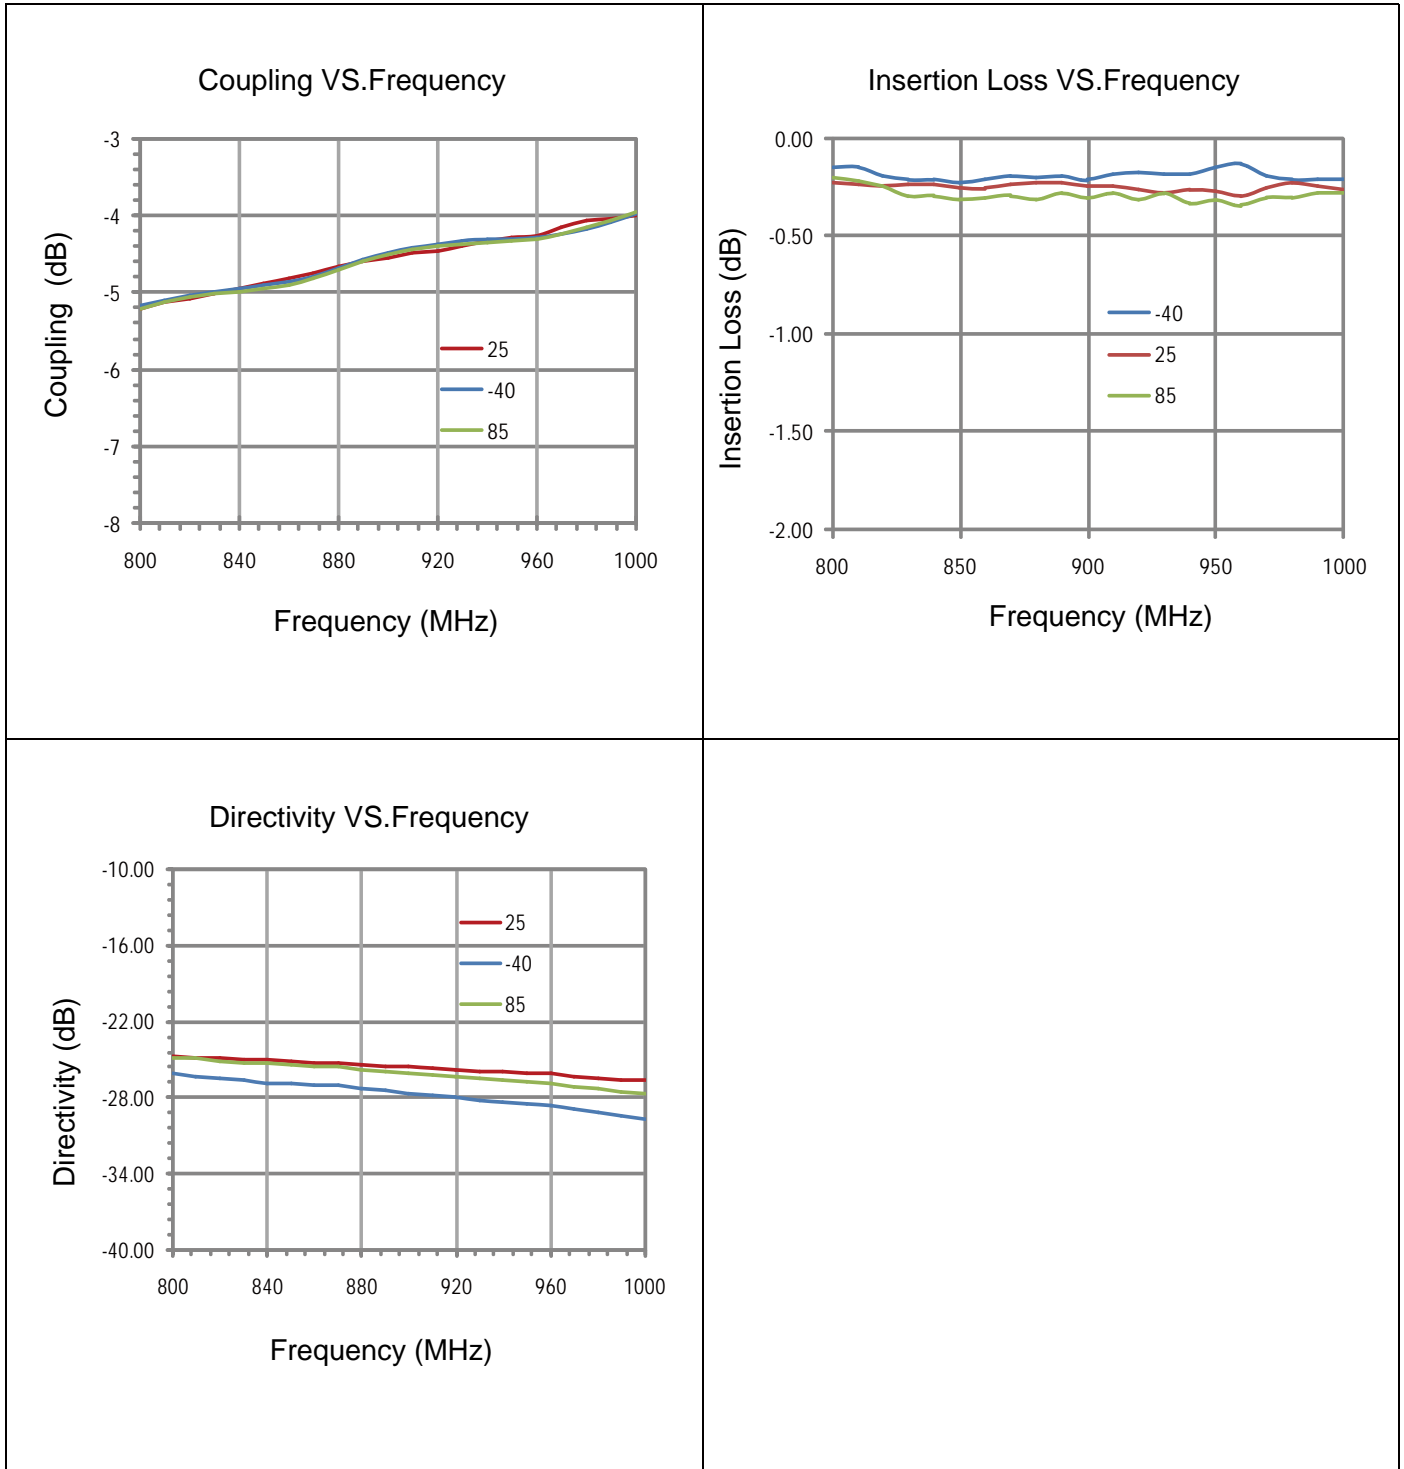

Yantel Corporation

Add : 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
 Tel : 86-755-8355-1886 Fax : 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Data Sheet


DC0900U05

Directional Coupler

830 MHz-930 MHz



Typical Performance (-40°C, 25°C, 85°C: 800-1000 MHz)

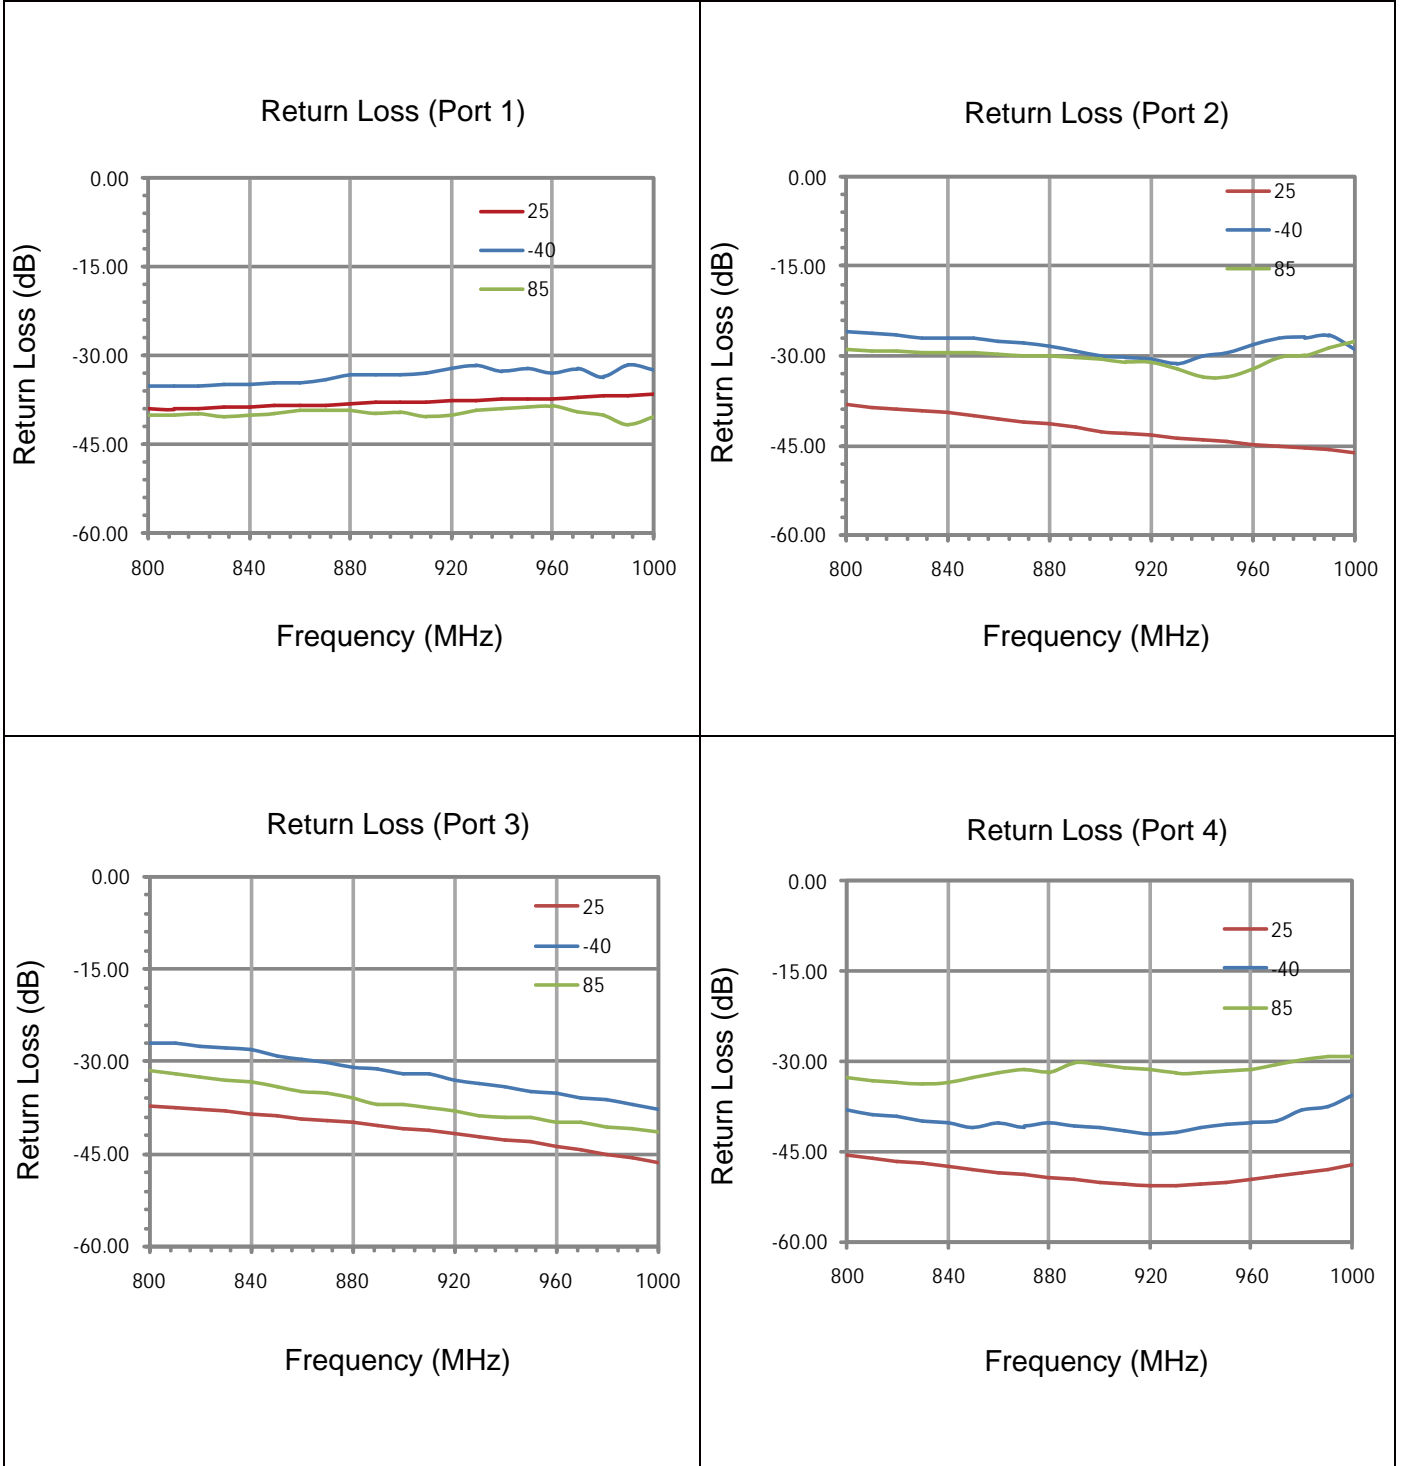

Yantel Corporation

Add : 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
 Tel : 86-755-8355-1886 Fax : 86-755-8355-2533


For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Data Sheet

DC0900U05


Directional Coupler

830 MHz-930 MHz




Yantel
Key Patents Lead Microwave Tech

Outline Drawing

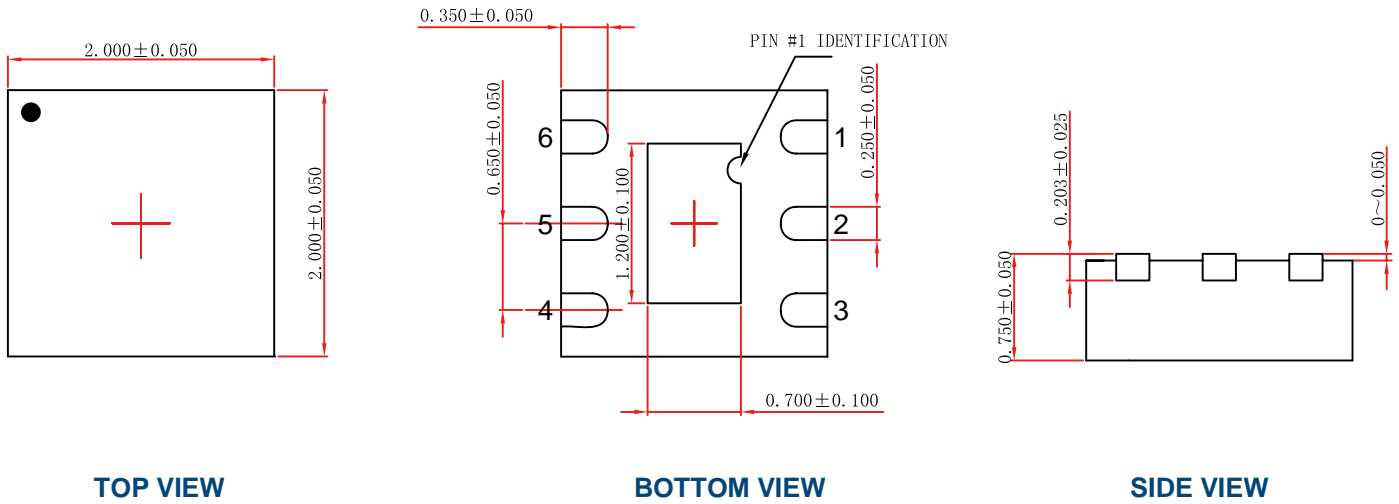


Land Pattern

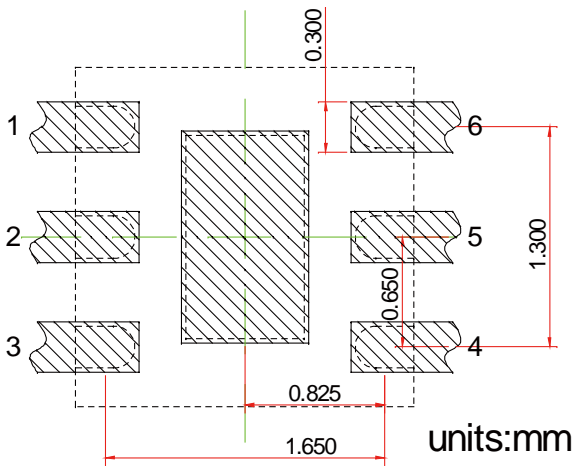

Recommended Land Pattern Top View

Notes: All dimensions show in millimeters

Pin Out

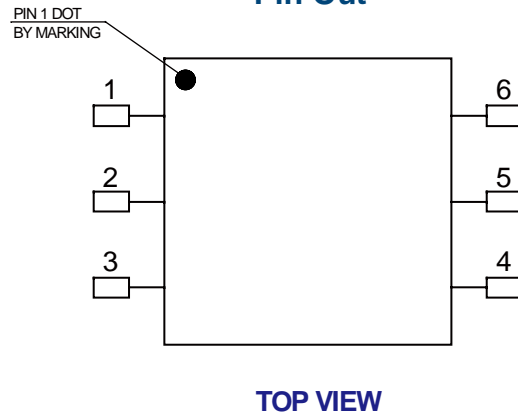

Pin #	Connection
1	IN
2	GND
3	ISOLATION
4	COUPLED
5	GND
6	DIRECT

Yantel Corporation

Add : 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel : 86-755-8355-1886 Fax : 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com