


EI35130



Previous

Next

3 1/2 digits+ lo bat	View Area
	63.0j24.0

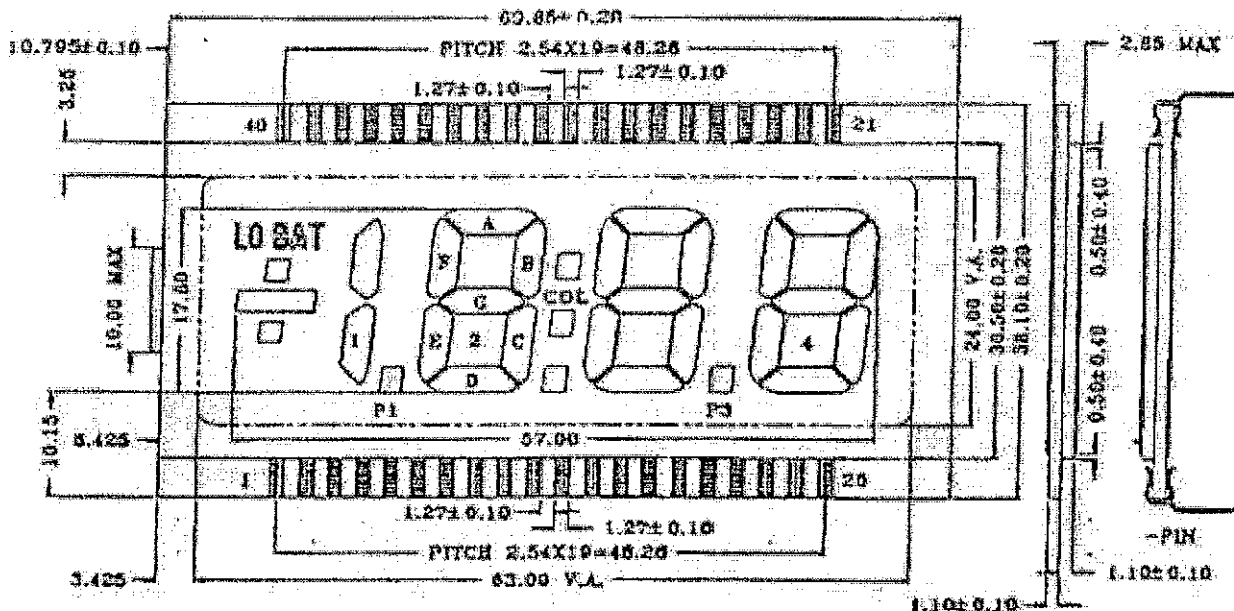

A. Dimensions

1. Length of top glass : 69.85 ± 0.20 mm
Width of top glass : 38.10 ± 0.20 mm
2. Length of bottom glass : 69.85 ± 0.20 mm
Width of bottom glass : 30.50 ± 0.20 mm
3. Thickness of LCD (max) : 2.85 mm
4. Thickness of glass
Top : 1.10 mm / Bottom : 1.10 mm
5. Length of viewing area
Horizontal : 63.00 mm / Vertical : 24.00 mm

B. Display specification

1. Duty : STATIC

2. Temperature


Operating : -10 TO +60°C / Storage : -20 TO +70°C

3. Polarizer

Top : TRANSMISSIVE / Bottom : REFLECTIVE

4. End seal : LEFT

5. Pitch of pin : 2.54 mm



DRIVER : TELEDYNE TSC815

PIN	1	2	3	4	5	6	7	8	9	10
COM1	COM		BC1					P1	E2	D2
PIN	11	12	13	14	15	16	17	18	19	20
COM	C2	P2	E3	D3	C3	P3	E4	D4	C4	B4
PIN	21	22	23	24	25	26	27	28	29	30
COM	A4	F4	G4	B3	A3	F3	G3	COL	B2	A2
PIN	31	32	33	34	35	36	37	38	39	40
COM	F2	G2						LO BAT		COM