

# ER3005 THRU ER310

3 Amperes Leded Type Super Fast Rectifiers  
VOLTAGE : 50 TO 1000Volts

Features	Outline
<ul style="list-style-type: none"> <li>• Axial lead type devices for through hole design.</li> <li>• High current capability.</li> <li>• Superfast recovery time for switching mode application.</li> <li>• High surge current capability.</li> <li>• Glass passivated chip junction.</li> <li>• Suffix "G" indicates Halogen free parts, ex. ER3005G</li> <li>• Lead-free parts meet environmental standards of MIL-STD-19500 /228</li> </ul>	<p>DO-27(DO-201AD)</p> <p style="text-align: center;">Dimensions in inches and (millimeters)</p>
Mechanical data	
<ul style="list-style-type: none"> <li>• Epoxy:UL94-V0 rated flame retardant</li> <li>• Case : Molded plastic, DO-201AD / DO-27</li> <li>• Lead : Axial leads, solderable per MIL-STD-202, Method 208 guranteed</li> <li>• Polarity : Color band denotes cathode end</li> <li>• Weight : Approximated 1.10 gram</li> </ul>	

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	ER3005	ER301	ER302	ER304	ER306	ER308	ER310	UNIT	
Making code		ER3005	ER301	ER302	ER304	ER306	ER308	ER310		
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700		
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000		
Maximum Forward Voltage	$V_F$	0.95			1.25	1.70			V	
Operating Temperature	$T_J$	-50 ~ +150								°C

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current		$I_O$			3.0	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC methode)	$I_{FSM}$			125	A
Reverse current	$V_R = V_{RRM} T_A = 25^\circ C$	$I_R$			1.0	uA
	$V_R = V_{RRM} T_A = 100^\circ C$				300	
Maximum reverse recovery time	$I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A$	$T_{rr}$			35	nS
Typical junction capacitance	f=1MHz and applied 4V DC reverse voltage	$C_j$		45		pF

# ER3005 THRU ER310

3 Amperes Leded Type Super Fast Rectifiers  
VOLTAGE : 50 TO 1000Volts

## Rating and characteristic curves

FIG.1-TYPICAL FORWARD CHARACTERISTICS

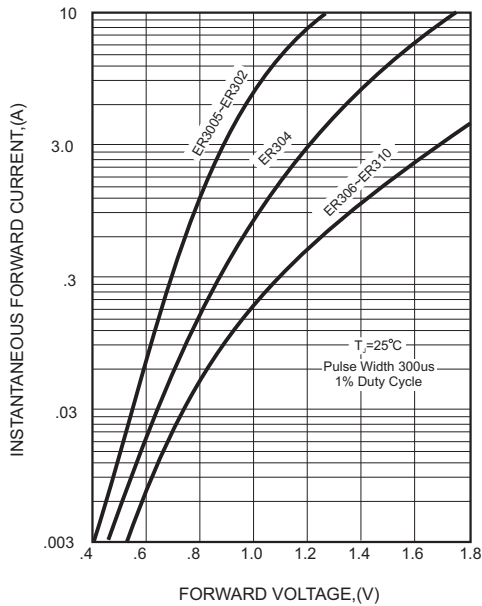


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE


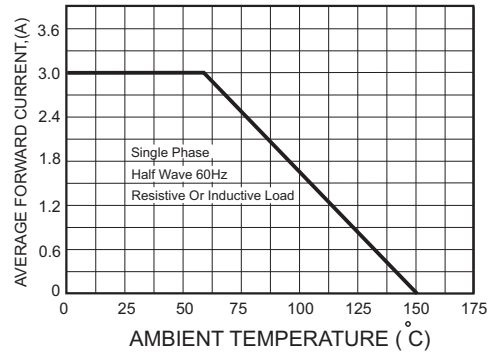


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

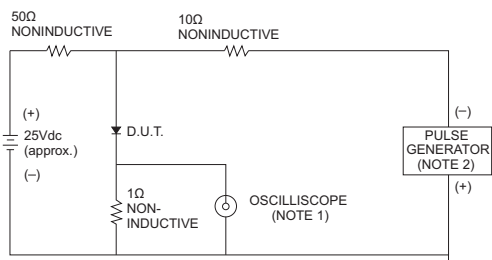

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm.22pF.  
2. Rise Time= 10ns max., Source Impedance= 50 ohms.

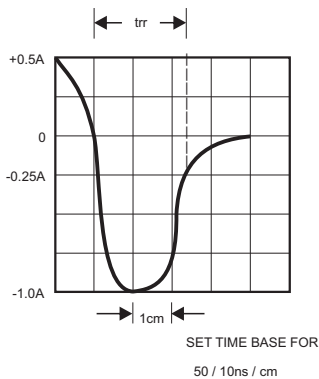


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

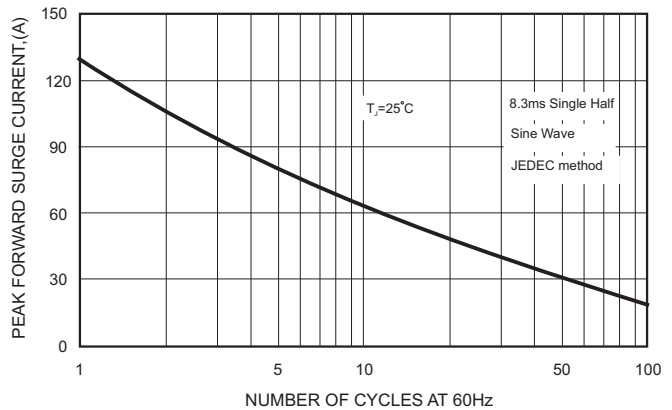


FIG.5-TYPICAL JUNCTION CAPACITANCE

