



Fast Recovery Diode for IGBT

Outline Drawings Units mm

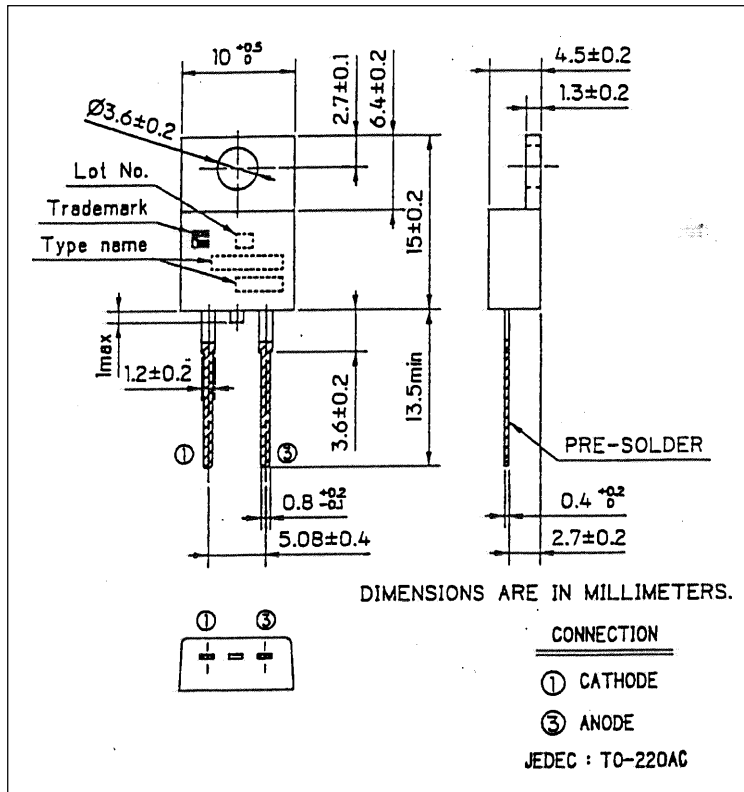

Equivalent circuit

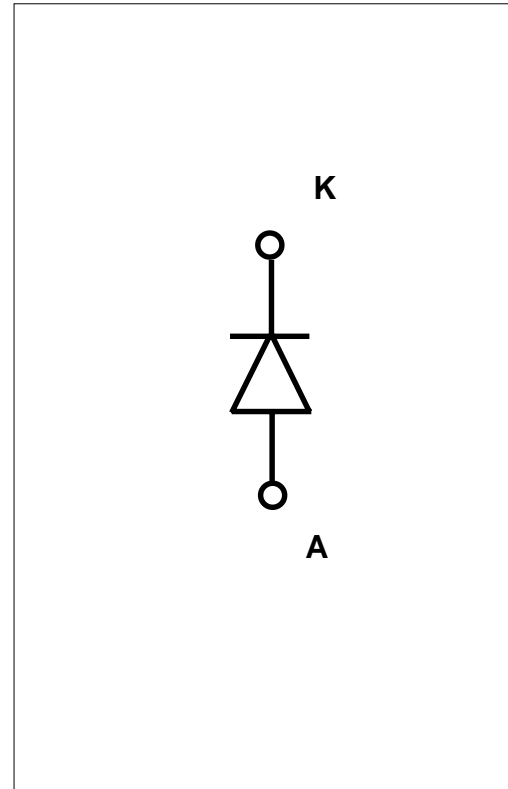

Maximum ratings and characteristics

Absolute maximum ratings (T_c=25°C)

Item	Symbol	Test Conditions	Ratings	Units	
Repetitive Reverse Voltage	V _{RRM}		600	V	
Repetitive peak surge current	I _{FM}	20kHz Duty 50% Squ. wave	T _c =91°C	20	A
			T _c =25°C	35	A
Average rectified forward current	I _{F(A)}	DC	20	A	
Non-repetitive peak surge current	I _{FSM}	Pulse 10ms, sin. wave	90	A	
Maximum Power Dissipation	P _o		55	W	
Operating Temperature	T _j		+150	°C	
Storage Temperature	T _{stg}		-40 to +150	°C	
Mounting Screw Torque			50	N-cm	

Electrical characteristics (at T_c=25°C unless otherwise specified)

Item	Symbol	Test Conditions	Max	Units
Reverse Current	I _R	V _R = 600V	1.0	mA
Forward voltage	V _{FM}	I _F = 20A	3.0	V
Reverse recovery time	t _{rr}	I _F = 20A, V _R =200V, di/dt=100A/μs	0.3	μs

Thermal resistance characteristics

Item	Symbol	Test Conditions	Max	Units
Thermal resistance	R _{th(j-c)}	junction to case	2.27	°C/W

Characteristics

