


ESD5471Z
1-Line, Bi-directional, Transient Voltage Suppressor
<http://www.sh-willsemi.com>
Descriptions

The ESD5471Z is a bi-directional TVS (Transient Voltage Suppressor). It is specifically designed to protect sensitive electronic components which are connected to low speed data lines and control lines from over-stress caused by ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning.

The ESD5471Z may be used to provide ESD protection up to $\pm 30\text{kV}$ (contact and air discharge) according to IEC61000-4-2, and withstand peak pulse current up to 6A (8/20 μs) according to IEC61000-4-5.

The ESD5471Z is available in DFN0603-2L package. Standard products are Pb-free and Halogen-free.


DFN0603-2L (Bottom View)

Circuit diagram
Features

- Reverse stand-off voltage: $\pm 5\text{V}$ Max
- Transient protection for each line according to
IEC61000-4-2 (ESD): $\pm 30\text{kV}$ (contact and air discharge)
IEC61000-4-4 (EFT): 40A (5/50ns)
IEC61000-4-5 (surge): 6A (8/20 μs)
- Capacitance: $C_J = 9\text{pF}$ typ.
- Low leakage current
- Low clamping voltage: $V_{CL} = 12\text{V}$ typ. @ $I_{PP} = 16\text{A}$ (TLP)
- Solid-state silicon technology



C = Device code

* = Month code

Marking (Top View)
Applications

- Cellular handsets
- Tablets
- Laptops
- Other portable devices
- Network communication devices

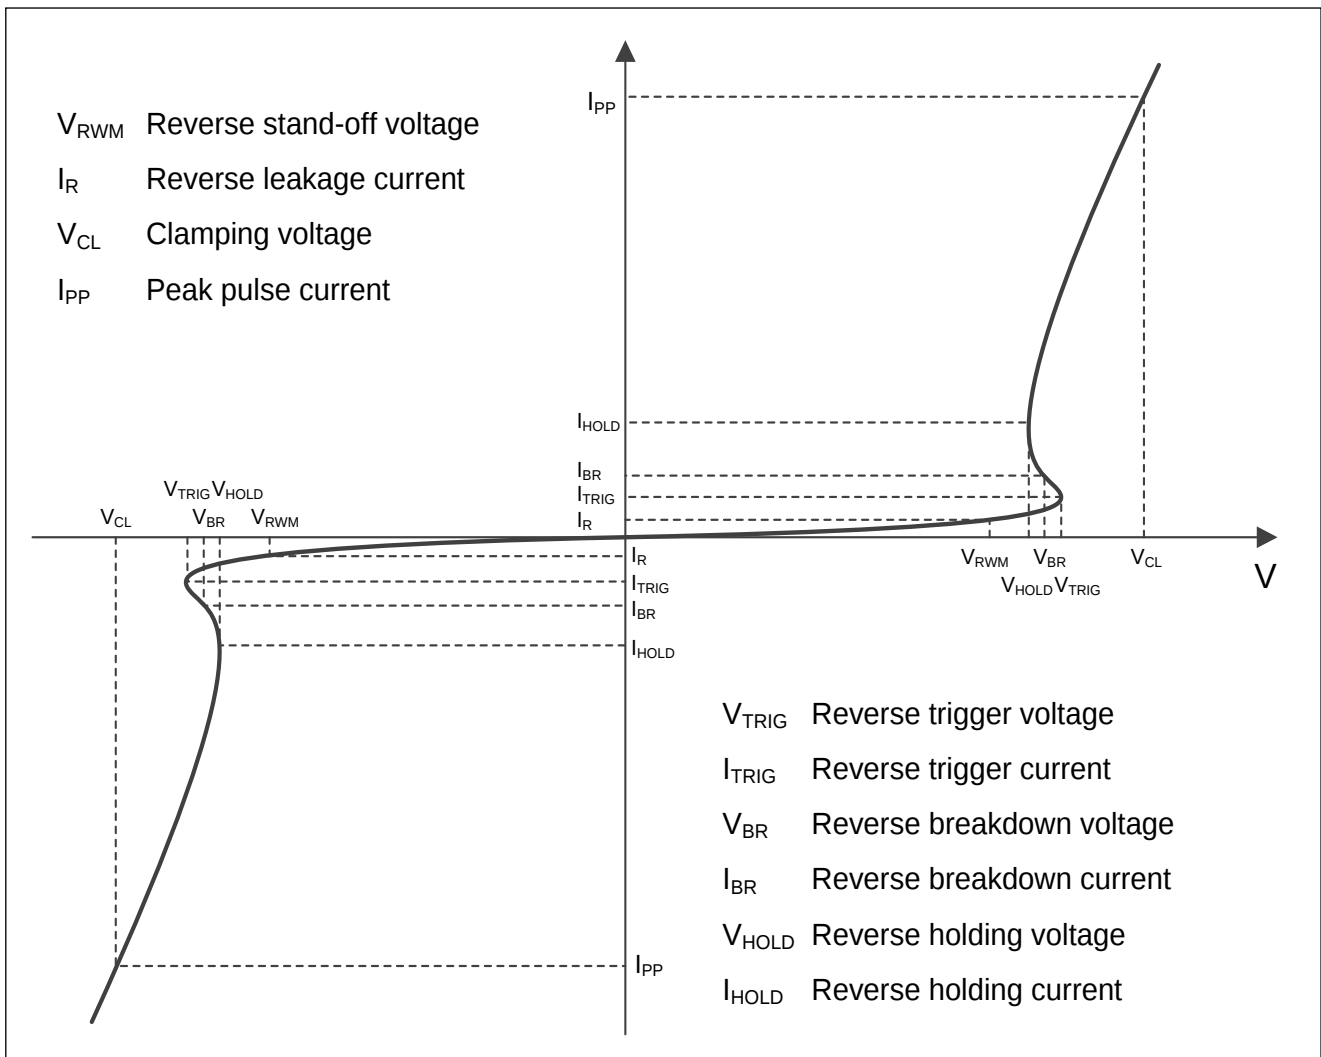
Order information

Device	Package	Shipping
ESD5471Z-2/TR	DFN0603-2L	10000/Tape&Reel

Absolute maximum ratings

Parameter	Symbol	Rating	Unit
Peak pulse power ($t_p = 8/20\mu s$)	P_{pk}	70	W
Peak pulse current ($t_p = 8/20\mu s$)	I_{pp}	6	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	kV
ESD according to IEC61000-4-2 contact discharge		± 30	
Junction temperature	T_J	125	$^{\circ}C$
Operating temperature	T_{OP}	-40~85	$^{\circ}C$
Lead temperature	T_L	260	$^{\circ}C$
Storage temperature	T_{STG}	-55~150	$^{\circ}C$

Electrical characteristics ($T_A=25^{\circ}C$, unless otherwise noted)



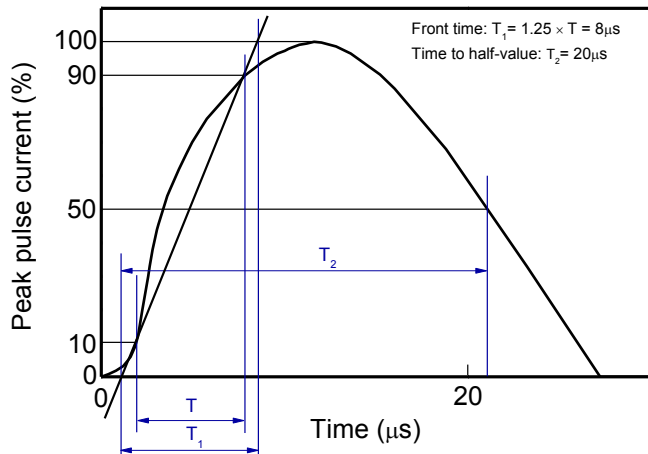
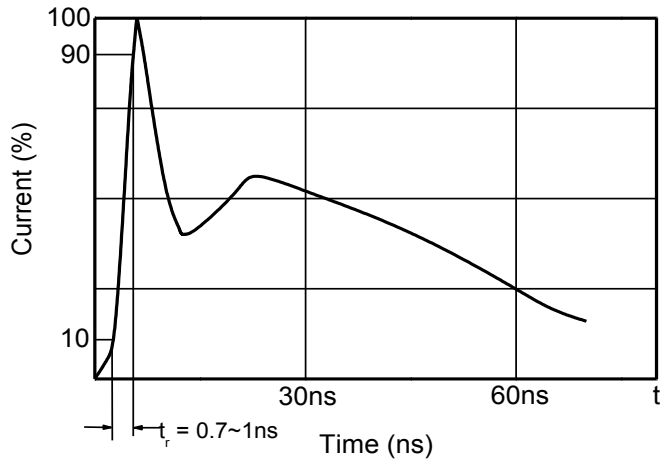
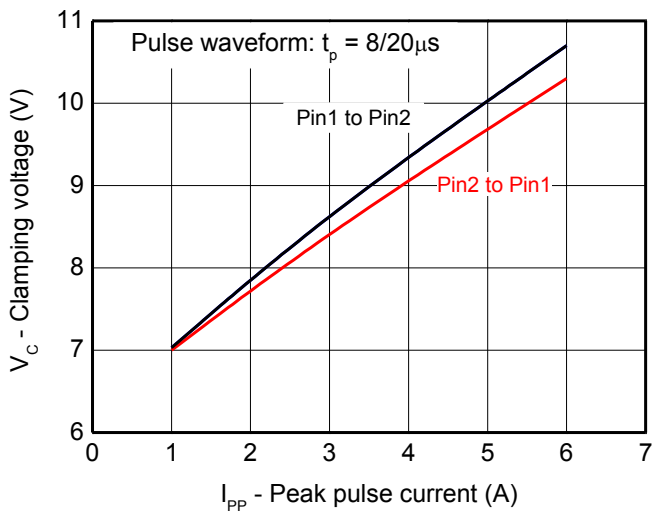
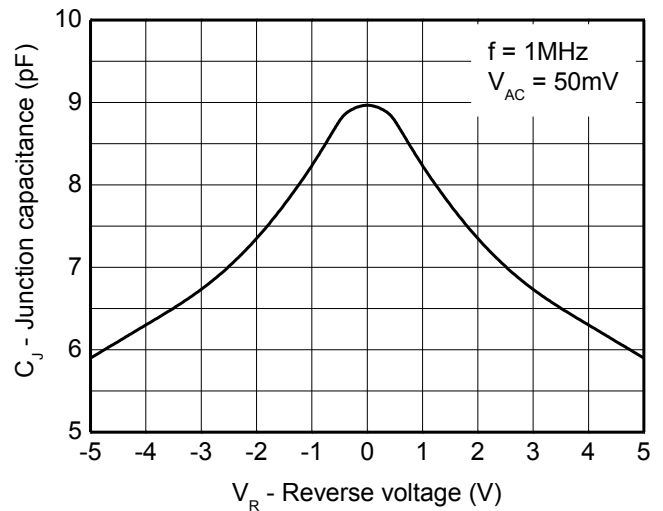
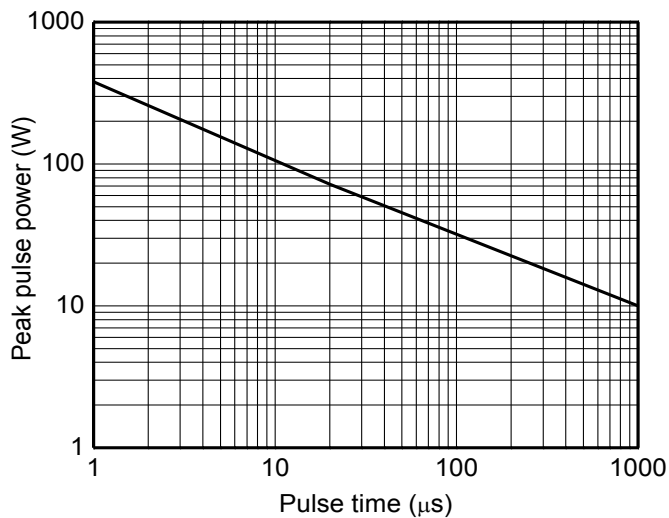
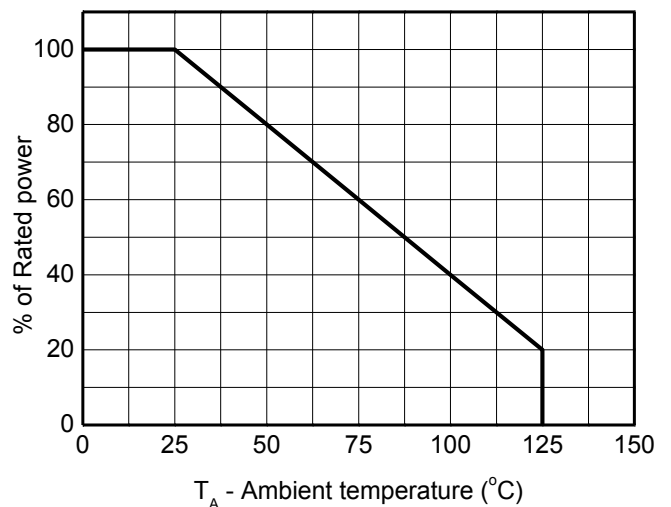
Definitions of electrical characteristics

Electrical characteristics ($T_A=25^{\circ}\text{C}$, unless otherwise noted)

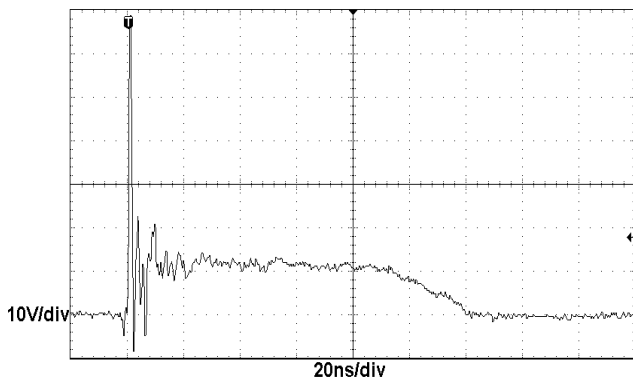
Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	V_{RWM}				± 5	V
Reverse leakage current	I_{R}	$V_{\text{RWM}} = 5\text{V}$			1	μA
Reverse breakdown voltage	V_{BR}	$I_{\text{BR}} = 1\text{mA}$	5.1			V
Reverse holding voltage	V_{HOLD}	$I_{\text{HOLD}} = 50\text{mA}$	5.1			V
Clamping voltage ¹⁾	V_{CL}	$I_{\text{PP}} = 16\text{A}$, $t_{\text{p}} = 100\text{ns}$		12		V
Clamping voltage ²⁾	V_{CL}	$V_{\text{ESD}} = 8\text{kV}$		12		V
Clamping voltage ³⁾	V_{CL}	$I_{\text{PP}} = 1\text{A}$, $t_{\text{p}} = 8/20\mu\text{s}$			8	V
		$I_{\text{PP}} = 6\text{A}$, $t_{\text{p}} = 8/20\mu\text{s}$			12	V
Dynamic resistance ¹⁾	R_{DYN}			0.28		Ω
Junction capacitance	C_{J}	$V_{\text{R}} = 0\text{V}$, $f = 1\text{MHz}$		9	12	pF
		$V_{\text{R}} = 5\text{V}$, $f = 1\text{MHz}$		6	8	pF

Notes:

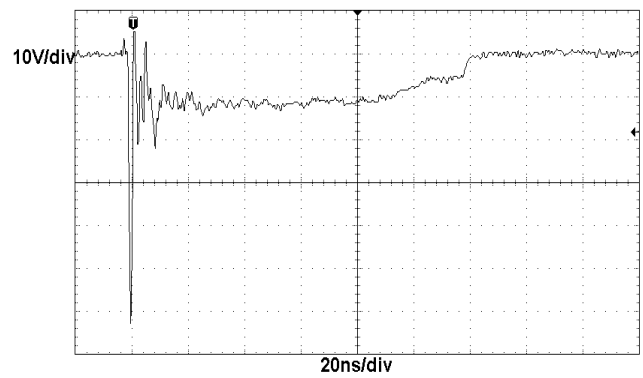
- 1) TLP parameter: $Z_0 = 50\Omega$, $t_{\text{p}} = 100\text{ns}$, $t_{\text{r}} = 2\text{ns}$, averaging window from 60ns to 80ns. R_{DYN} is calculated from 4A to 16A.
- 2) Contact discharge mode, according to IEC61000-4-2.
- 3) Non-repetitive current pulse, according to IEC61000-4-5.

Typical characteristics ($T_A=25^\circ\text{C}$, unless otherwise noted)

8/20 μs waveform per IEC61000-4-5

Contact discharge current waveform per IEC61000-4-2

Clamping voltage vs. Peak pulse current

Capacitance vs. Reverse voltage

Non-repetitive peak pulse power vs. Pulse time

Power derating vs. Ambient temperature

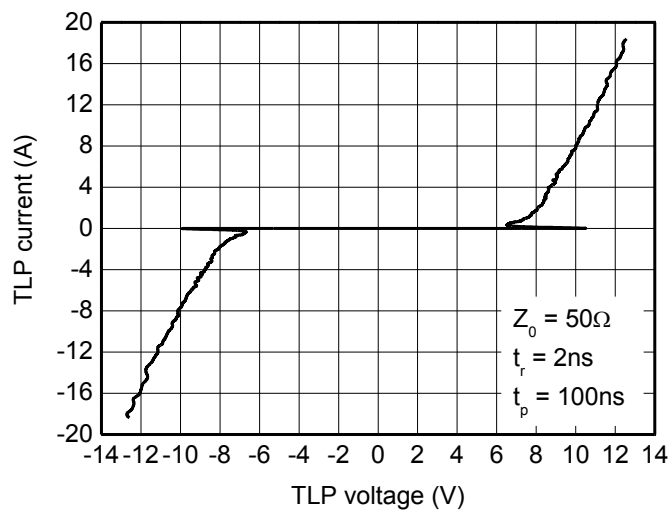
Typical characteristics ($T_A=25^{\circ}\text{C}$, unless otherwise noted)



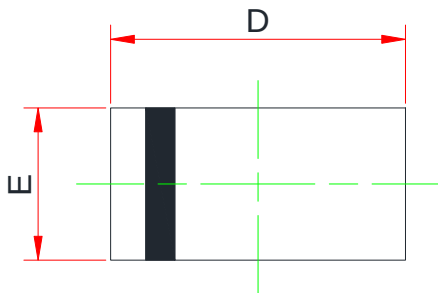
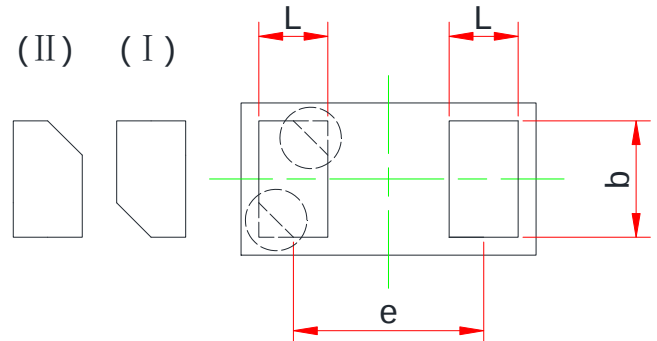
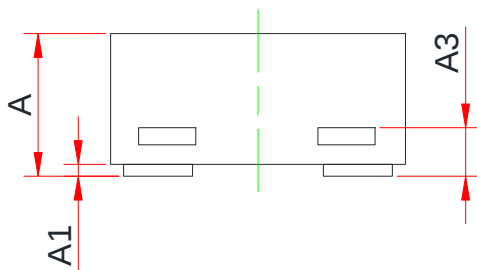
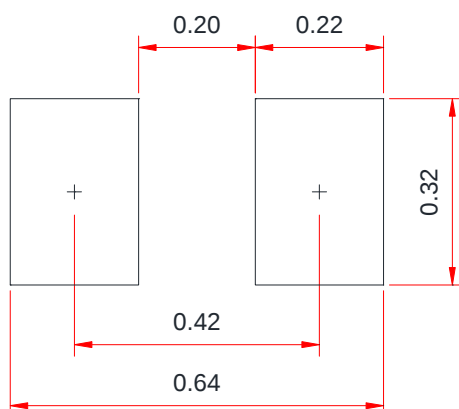
ESD clamping
(+8kV contact discharge per IEC61000-4-2)



ESD clamping
(-8kV contact discharge per IEC61000-4-2)



TLP Measurement

Package outline dimensions
DFN0603-2L

Top View

Bottom View

Side View
Recommend land pattern (Unit: mm)


Symbol	Dimensions in Millimeters		
	Min.	Typ.	Max.
A	0.230	-	0.340
A1	0.000	-	0.050
A3	0.102 REF.		
D	0.550	0.600	0.670
E	0.250	0.300	0.370
b	0.215	-	0.295
e	0.400 BSC		
L	0.115	-	0.195

Notes:

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met.