

Helping Customers Innovate, Improve & Grow


EX-401

Description

The EX-401 provides exceptionally low aging rates and tight temperature stabilities in an extremely small package over a wide range of environmental conditions. This EMXO series bridges the gap between current large, high precision OCXO's and smaller TCXO's. The EX-401 Series becomes the most economical choice where there is a need for spectral purity, short and long term stability, along with small size and dramatically reduced power consumption.

Features

- Low Power Consumption Precision Oscillator
- Fast Warm-Up
- Low Phase Noise
- Good Aging
- Small Form Factor
- SMD and Thru-Hole Mounting Option
- RoHS Compliant
- Standard Frequencies: 10MHz, 20MHz and 100MHz
- Design/Material Sourcing/Manufacture/Test in MHS,PA COO:USA
- No ITAR Restriction for Importing EAR99
- Previous Model Number: EX-380, EX-400 Series

Applications

- Mobile Data Communications
- Military Portable Radio
- Satellite Communications
- Airborne Equipment
- Avionics
- Instrumentation
- Marine/Land Seismic



Performance Specifications


Frequency Stabilities ¹					
Parameter	Min	Typ	Max	Units	Condition
vs. operating temperature range (See temperature & stability table)			±10	ppb	0... +50°C
			±20	ppb	-20... +70°C
			±30	ppb	-40... +85°C
vs. aging / day (See aging table)			±1.0	ppb	after 30 days of operation
vs. aging / per year			±100	ppb	
vs. aging / 10 years			±1	ppm	
Initial Accuracy	-0.2		+0.2	ppm	at time of shipment
vs. supply voltage change	-5		+5	ppb	VS ± 5%
vs. load change	-5		+5	ppb	Load ± 5%
Warm-up Time			45	sec.	to ± 1 ppm of final frequency (1 hour)
			60	sec.	to ± 100 ppb of final frequency (1 hour)
Supply Voltage (Vs)					
Supply voltage (Standard)	4.75	5.0	5.25	VDC	
Supply voltage (Option)	3.14	3.3	3.46	VDC	
Power Consumption			1.5	Watts	during warm-up
			0.25	Watts	steady state @ +25°C / 3.3 Vdc
			0.30	Watts	steady state @ +25°C / 5.0 Vdc

Performance Specifications


Parameter	Min	Typ	Max	Units	Condition
Signal [Standard]	HCMOS				
Load		15		pF	
Signal Level (Vol)			0.1 Vs	VDC	
Signal Level (Voh)	0.8 Vs 0.8 Vs			VDC VDC	Vs = 3.3 Vdc Vs = 5.0 Vdc
Rise \ Fall Time			5	ns	10MHz to 29.999MHz , (10 % - 80 %)
Rise \ Fall Time			3	ns	30MHz to 100MHz , (10 % - 80 %)
Duty cycle	45		55	%	
Signal [Standard]	Sinewave				
Load		50		ohm	
Output Power [Standard]	0		+4	dBm	50 Ohm load
Output Power [Option]	+3		+7	dBm	50 Ohm load
Output Power [Option]	+5		+9	dBm	50 Ohm load
Harmonics			-30	dBc	50 Ohm load
Frequency Tuning (EFC)					
Reference Voltage (Vref)	2.7 4.2		2.9 4.4	VDC VDC	Vs = 3.3 Vdc Vs = 5.0 Vdc
Tuning Voltage	0		+Vref	VDC	
Tuning Range	See tuning range table				
Tuning Slope	Positive				
Additional Parameters					
Phase Noise (10 MHz)		-90		dBc/Hz	1 Hz
		-125		dBc/Hz	10 Hz
		-145		dBc/Hz	100 Hz
		-160		dBc/Hz	1 KHz
		-165		dBc/Hz	10 KHz
Phase Noise (100 MHz)		-95		dBc/Hz	10 Hz
		-125		dBc/Hz	100 Hz
		-150		dBc/Hz	1 KHz
		-160		dBc/Hz	10 KHz
		-165		dBc/Hz	100 KHz
Allan Deviation (10 MHz)			0.02	ppb	Tau = 1 sec
Acceleration Sensitivity			1.0	ppb/g	Total Gamma
Weight			5	grams	
Absolute Maximum Ratings					
Supply Voltage			5.5	VDC	
Output Load			50	pF	
Operable temperature range	-55		+85	°C	
Storage temperature range	-55		+85	°C	

Standard Environmentals	
Vibration Sine	MIL-STD-202, Method 204, Condition G (30g peak, 10Hz-2000Hz)
Vibration Random	MIL-STD-202, Method 214, Condition I-H (30g RMS, 10Hz-2000Hz)
Shock	MIL-STD-202, Method 213, Condition E (1000g, 0.5ms, 1/2 sine)
Solderability	MIL-STD-883, Method 2003


Surface Mount

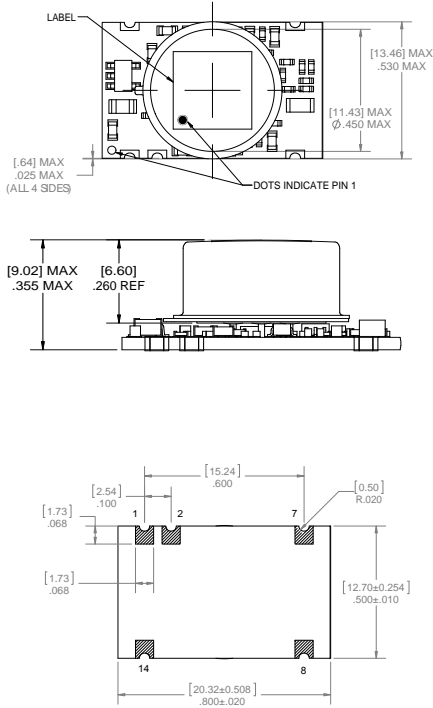

Thru-hole (5 Pin)

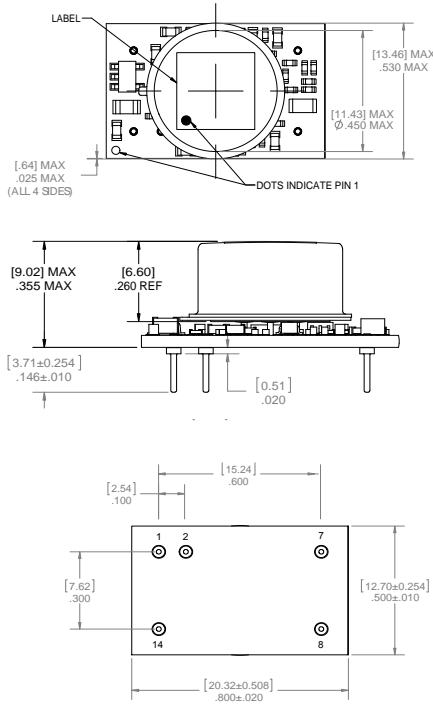




Thru-hole (4 Pin)

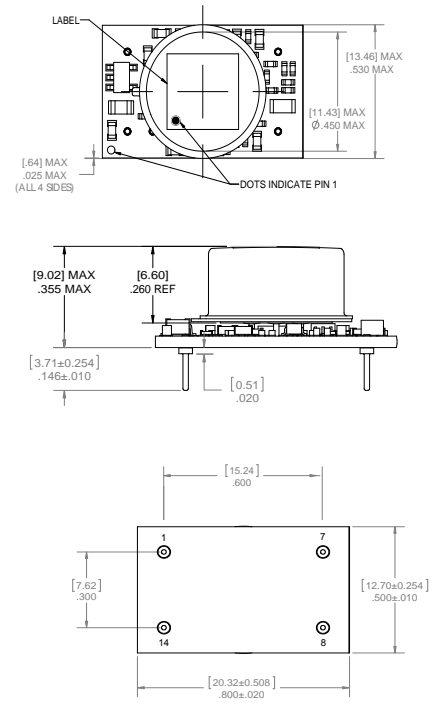


Pin Connections	
Pin	Function
1	EFC Input
2	Vref Output
7	Ground (Case)
8	RF Output
14	Supply Voltage Input

Pin Connections	
Pin	Function
1	EFC Input
7	Ground (Case)
8	RF Output
14	Supply Voltage Input

Standard Shipping Method

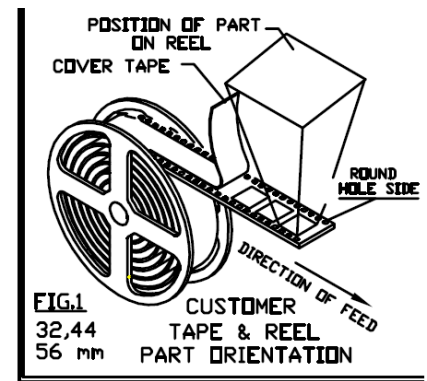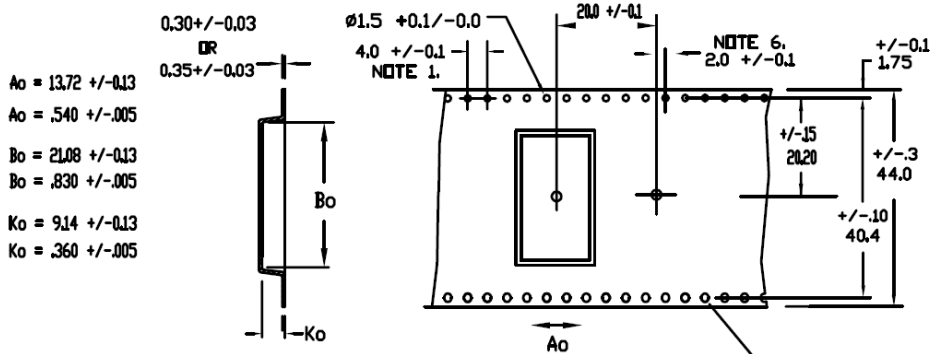

Recommended Reflow Profiles for Pb-Free & Sn-Pb

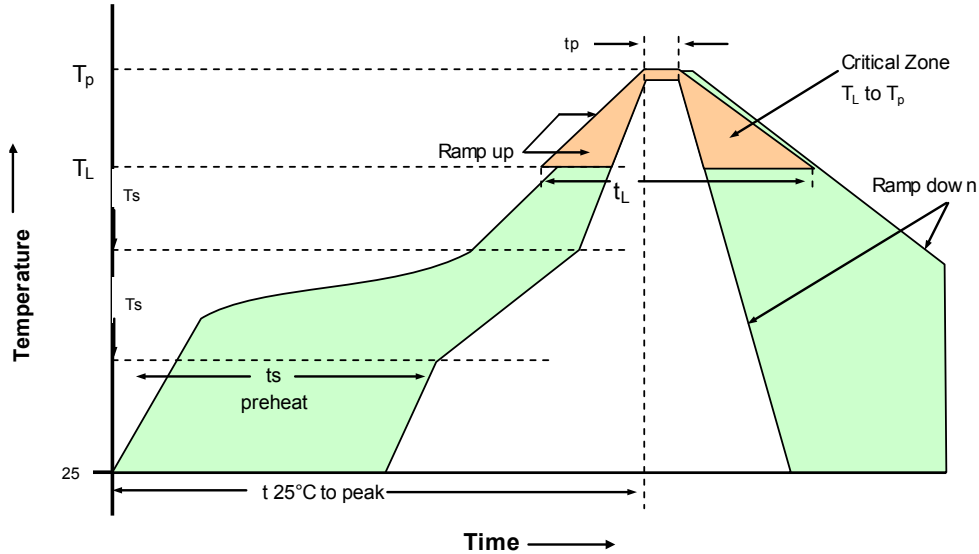

230°C Reflow Profile

Profile Feature	Sn-Pb Assembly	Profile Feature	Sn-Pb Assembly
Average ramp-up rate (TL to TP)	3°C/seconds max.	Time 25°C to Peak Temperature	4 minutes max.
Preheat - Temperature min T _{sm} - Temperature Min T _{smax} - Time (min to max) (t _s)	135°C 155°C 60-90 seconds	Time maintained above - Temperature (TL) - Time (tL)	183°C 45-60 seconds
T _{smax} to TL -Ramp-up Rate	3°C/seconds max.		
Time maintained above - Temperature (TL) - Time (TL)	183°C 40-60 seconds	Time within 5°C of actual Peak Temperature (t _p)	10-20 seconds max.
Peak Temperature (T _p)	max 230°C	Ramp-down Rate	6°C/seconds max.

Note: All temperatures refer to topside of the package, measured on the package body surface.


260°C Reflow Profile

Profile Feature	Pb-Free Assembly	Profile Feature	Pb-Free Assembly
Average ramp-up rate (TL to TP)	3°C/seconds max.	Time 25°C to Peak Temperature	8 minutes max.
Preheat - Temperature min T _{sm} - Temperature min T _{smax} - Time (min to max) (t _s)	150°C 200°C 60-180 seconds	Time maintained above - Temperature (TL) - Time (tL)	217°C 60-150 seconds
T _{smax} to TL -Ramp-up Rate	3°C/seconds max.		
Time maintained above - Temperature (TL) - Time (TL)	217°C 60-150 seconds	Time within 5°C of actual Peak Temperature (t _p)	20-40 seconds max.
Peak Temperature (T _p)	max 260°C	Ramp-down Rate	6°C/seconds max.

Note: All temperatures refer to topside of the package, measured on the package body surface.

Ordering Information

EX - 401 0 - D A P - 108 0 - 10M000000

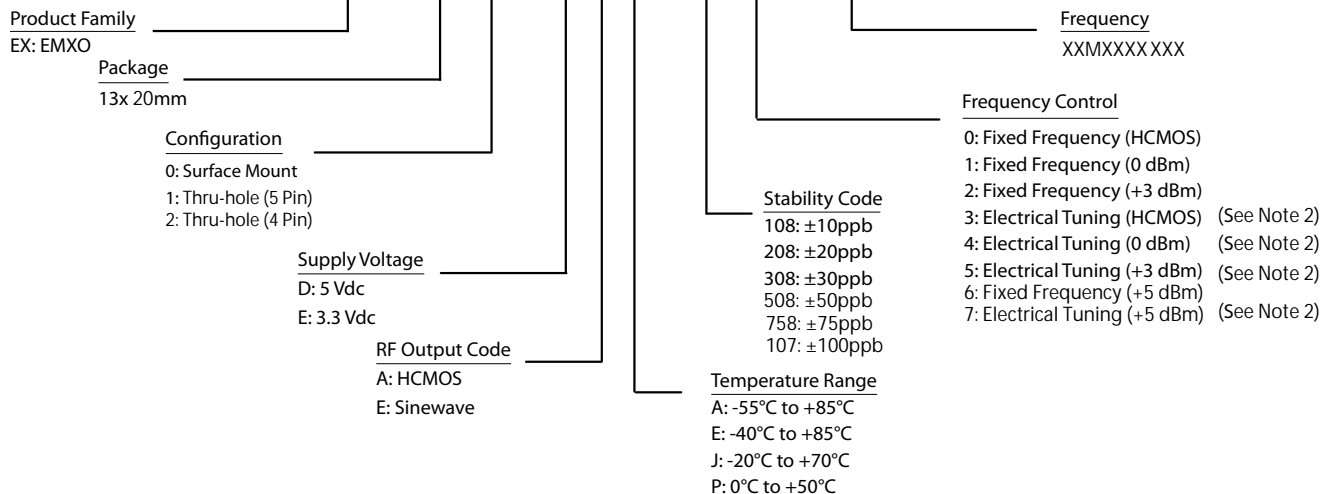

Temperature Range and Stability Table				
(Temperature Stability Reference to (F _{max} -F _{min})/2)				
Stability/Temperature	A: -55°C to +85°C	E: -40°C to +85°C	J: -20°C to +70°C	P: 0°C to +50°C
108 (+/-10ppb)				10-20MHz
208 (+/-20ppb)			10-20MHz	10-20MHz
308 (+/-30ppb)	10-20MHz	10-20MHz	10-20MHz	10-20MHz
508 (+/-50ppb)	10-50MHz	10-50MHz	10-50MHz	10-50MHz
758 (+/-75ppb)	10-80MHz	10-100MHz	10-100MHz	10-100MHz
107 (+/-100ppb)	10-100MHz	10-100MHz	10-100MHz	10-100MHz

Aging Table			
Frequency Range	Daily Rate (ppb/day)	Yearly Rate (ppb/year)	Tuning Range (ppm)
10MHz to 15MHz	± 1	± 100	± 1
>15MHz to 50MHz	± 2	± 200	± 2
>50MHz	± 2	± 200	Not Available

Notes:

- Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
- Electrical Tuning Option available up to 50MHz. Only fixed Frequency Option beyond 50MHz output frequency.
- Unless otherwise stated, all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, and temperature (25°C).
- Phase noise degrades with increasing output frequency.
- Subject to technical modification.
- Contact factory for availability.

Contact Information

USA:
100 Watts Street
Mt Holly Springs, PA 17065
Tel: 1.717.486.3411
Fax: 1.717.486.5920

Europe:
Landstrasse
74924 Neckarbischofsheim
Germany
Tel: +49 (0) 7268.801.0
Fax: +49 (0) 7268.801.281



Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATION OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING, BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly, or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip and Vectron names and logos are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.