

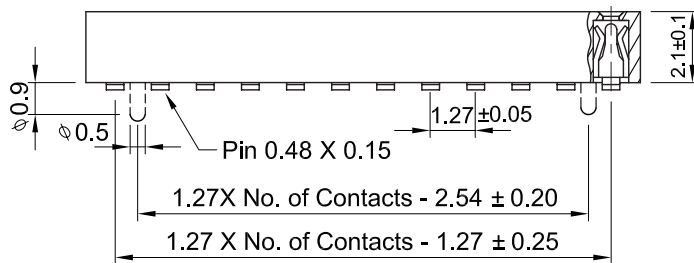


Recommended P.C. Board SMD Layout

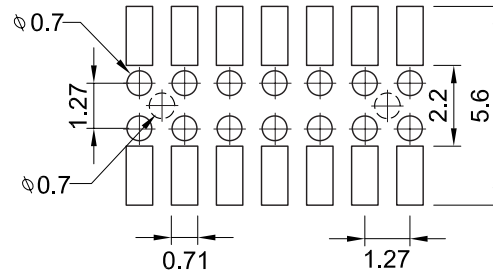

Specifications

- Current Rating: 1 Amps
- Insulator Resistance: 1000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric Withstanding: AC 300V
- Operating Temperature : -40°C ~ +125°C
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0, Nylon-6T
- Contact Plated: See Option / Standard = Full Gold Flash

Part Numbering System

FH7C-SD-2131 XX - XX - X X X N

- Series** _____
- Terminal Dimension(D):** _____
42 = 4.2mm
45 = 4.5mm
- No. of Pins** _____
- Post Option:** _____
Nil = w/o Alignment Pin
A = with Alignment Pin
- Contact Plating** _____
- Cap Option:** _____
Nil = No Cap
F = Film
M = Metal Cap
P = Plastic Cap
- Packing Method:** _____
B = Tube
T = Tape and Reel
- Insulator Material:** _____
N = High Temperature Nylon-6T

* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	S: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	